



Pin Header

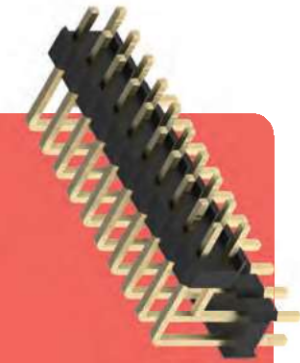


Current Rate: 3A
Dielectric Voltage: 1000V AC for one minute
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Material Contact: Copper Alloy, Gold Plated
Material Insulator: PBT or Nylon 6T, UL94V-0
Operating Temperature: -40°C~+105°C

Pin Header Straight Type 2.54mm Pitch

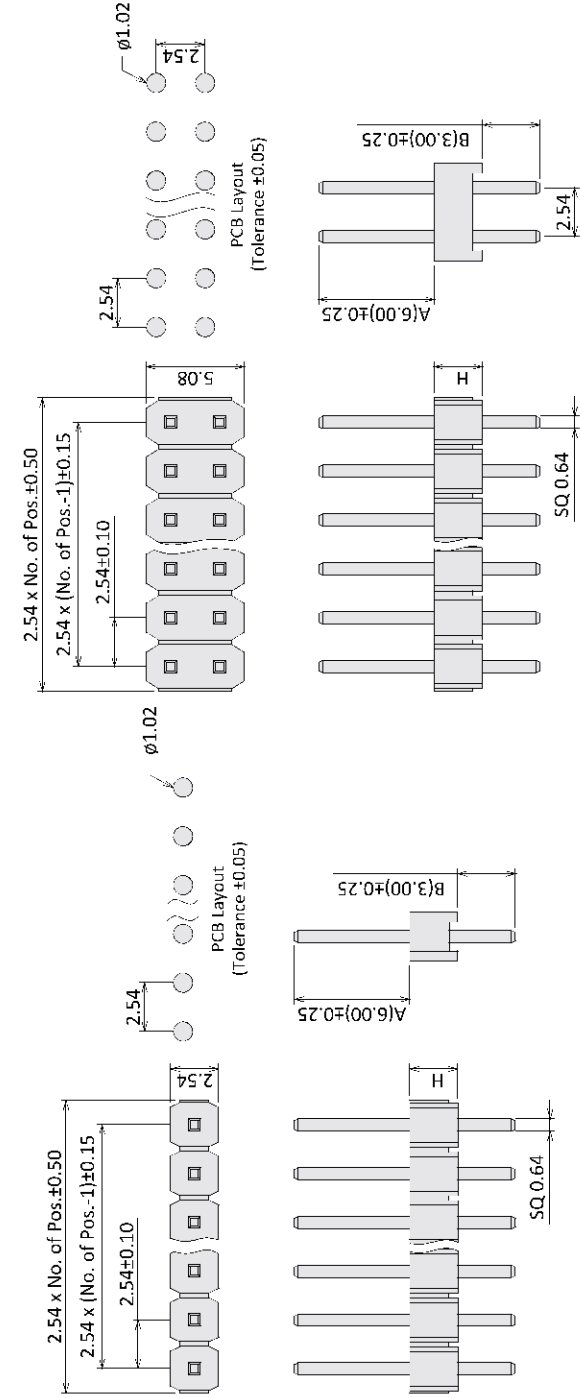

Pin Header Stack Straight Type 2.54mm Pitch

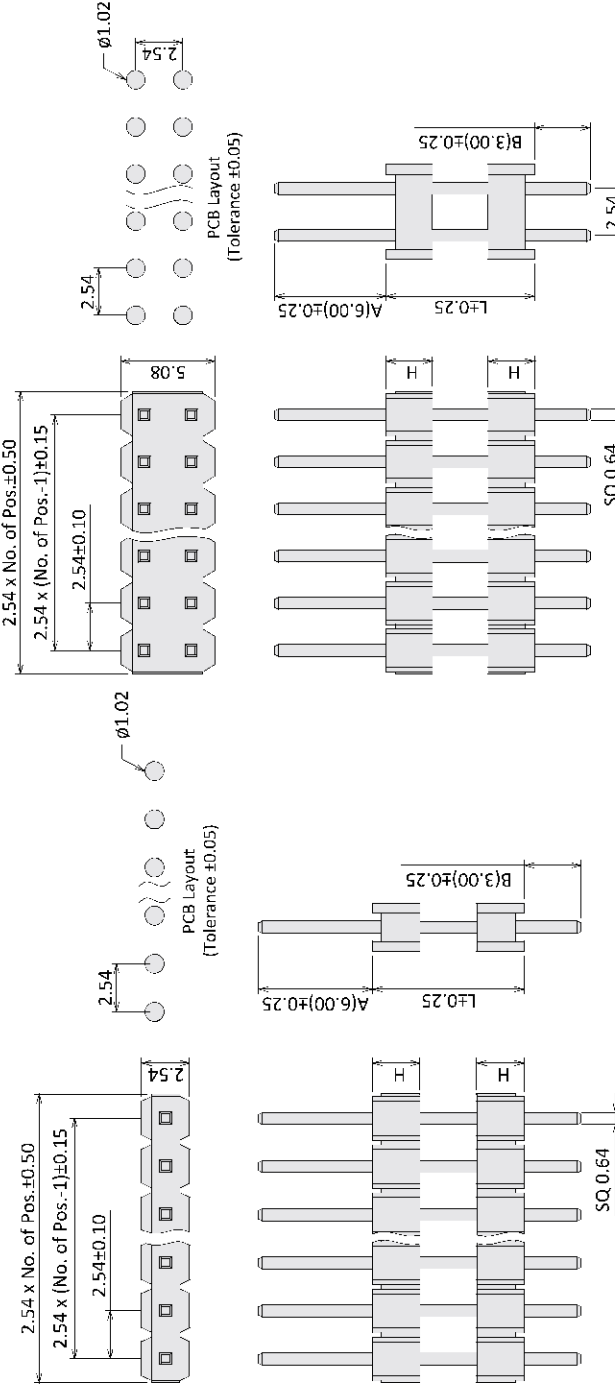

Order Information

P	X	25	XX	XX	X	A/B	A/L/B	-	X	XX
L: Straight D: Stack Straight		2.54mm Pitch		15: H=1.5mm 17: H=1.7mm 25: H=2.5mm	G0: Gold Flash S0: Gold / Tin T0: Tin Plated	1: RoHS + PBT 2: RoHS + NY 6T	Dimensions A, B A, L	1: Single Row 2: Dual Row		Contacts Per Row (02~40)

Order Information

P	X	25	XX	XX	X	A/B	A/L/B	-	X	XX
L: Straight D: Stack Straight		2.54mm Pitch		15: H=1.5mm 17: H=1.7mm 25: H=2.5mm	G0: Gold Flash S0: Gold / Tin T0: Tin Plated	1: RoHS + PBT 2: RoHS + NY 6T	Dimensions A, L, B	1: Single Row 2: Dual Row		Contacts Per Row (02~40)