


Current Rate: 2A
Dielectric Voltage: 500V AC for one minute
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Material Contact: Copper Alloy, Gold Plated
Material Insulator: Nylon 6T, UL94V-0
Operating Temperature: -40°C~+105°C

Pin Header SMT Right Angle Type 2.00mm Pitch



Pin Header Stack Right Angle Type 2.00mm Pitch

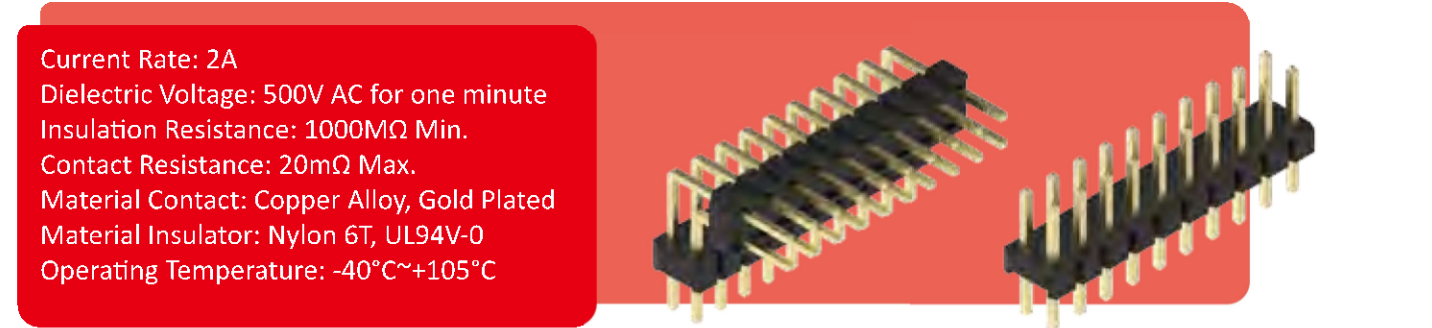

P	X	20	XX	XX	2	A/B/C/D A/B	- X	XX
	RD: Stack R/A L: Straight	2.00mm Pitch	15: H=1.5mm 20: H=2.0mm	G0: Gold Flash S0: Gold / Tin T0: Tin Plated	2: RoHS + NY 6T	Dimensions A, B, C, D A, B	1: Single Row 2: Dual Row 3: Triple Row 4: Quad Row	Contacts Per Row (02~40)