

6 MODULE LOW ENCLOSURES FOR M36 DIN-RAIL

SERIES 1050 LOW

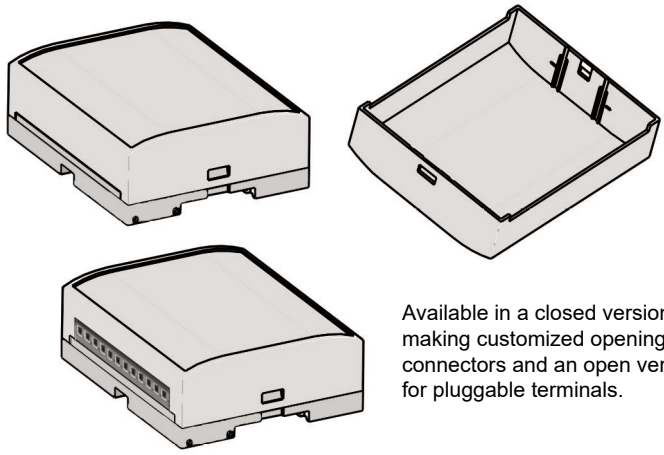

Available in a closed version for making customized openings for connectors and an open version for pluggable terminals.

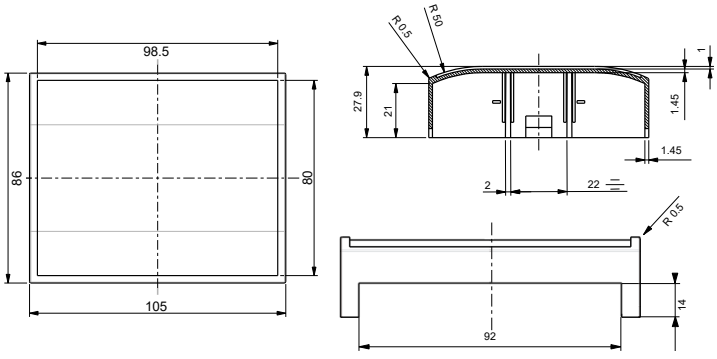

For detailed drawings please see www.bernic.dk
or ask for a CAD drawing.

Module enclosure for M36 DIN-rail. Series 1050 low is, if requested, available in several colours and with custom made holes in the front. Lid, PCB, customized label and packing is available. A closed version without terminals is also available. Trimmers and spindles that fit the height of the box are available.

TECHNICAL DATA

TOP PART:


Material:	Lexan 940
Colour:	Grey (RAL 7035)
Max. temperature:	100° C
Width:	105 mm (6 modules)
Label measurement:	79.6 x 98.0 mm
Self-extinguishing:	Acc. to UL94-V0
IP protection:	IP 20

BASE PART:

Material:	Noryl VO 1550
Colour:	Black (RAL 9005)
Max. temperature:	100° C
Max. wire dia.:	2 x 2.5 mm²
Max. load:	10A (for higher load please inquire)
Terminals:	36 fixed or plugable
Mounting:	DIN-rail (EN50022)
Self-extinguishing:	Acc. to UL94-V0

HORIZONTAL PCB DIMENSIONS

PCB shown from copperside

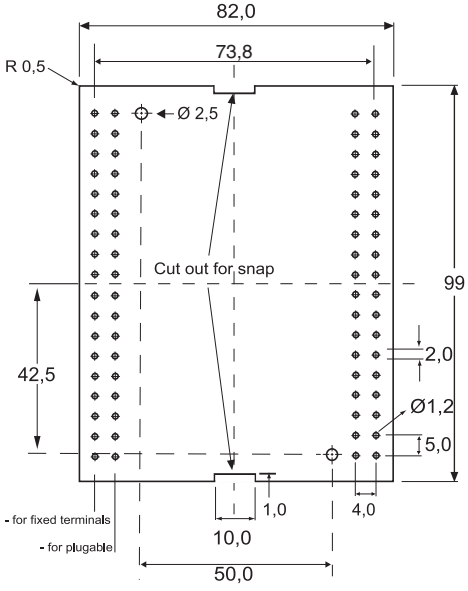

TYPE 1050 LOW:	ORDER CODE:
Complete, 257 for plugable	p/n 8069001051
Complete, closed, no terminals	p/n 8016910601
Top part, 257, plugable	p/n 8069006101
Top part, grey, closed, no terminals	p/n 8069006101
Base part with clip and 2 screws	p/n 4969021057
DIN-rail clip for 1050	p/n 0669000604
Packing for 1050	p/n 2068105000
PCB for 1050	p/n 4999001050
Terminal for 1050, 257/18, HO/A, PCB part	p/n 1155718580
Terminal for 1050, 256/18, wire part	p/n 1155618080
Terminal for 1050, 605/18, fixed terminals	p/n 3950141808
Screw/selfcutting 2 pcs.	p/n 7006102965

Many more p/n available - please enquire.

- All measurements are in mm.
- ● Please note that most plugable terminals are in 5,08 pitch and need a bigger hole in the PCB.