

Constant Voltage LED Driver 30W




Features:

- Real 30W output, designed for 100% full loading constantly
- Aluminium housing, 100% waterproof, IP 67
- 100% full load burn-in tested
- Overload / short circuit protection
- Universal input voltage (100V~250V)
- Plug is available
- OEM is acceptable

Application:

- Interior lighting;

Dimensions:

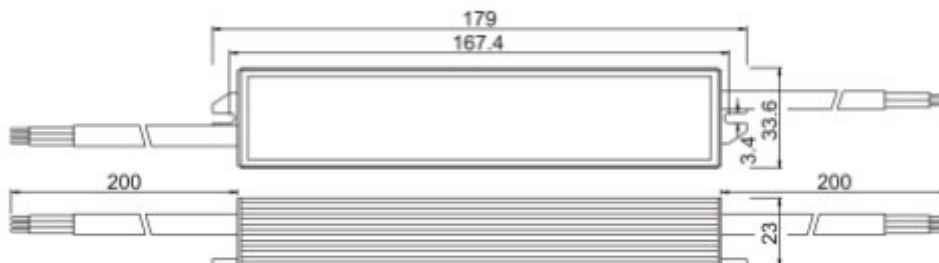

Specification:

Model	JLV-12030KA	JLV-24030KA
Input voltage range	100~250VAC	
Input frequency range	47~63Hz	
Rated output voltage	DC12V	DC24V
Rated output current	2.5A	1.25A
Rated DC output power	30W (100% full loading acceptable)	
Conversion efficiency	>83%	>83%
Ripple noise	<100mV	
Line regulation	<1%	
Input-output Withstand Voltage (Hi-pot)	3750VAC/1min Drain Current <5mA	
Load regulation	<1%	
Waterproof rate	IP67	
Working temperature	-30~+50 °C	
Net Weight	0.22KG	
Dimension(mm)	180*33*23mm	
Package	50pcs/carton	
Carton size(cm)	3.88*2.13*2.6	
Carton weight	12.5KG	