



CJ30 Series Board Mount Telephone Gang Jacks



- Available 2 to 8 ports in 6 ways
- Available 1 to 4 ports in 8 ways
- Option metal pegs
- Insulator: Gray, Glass Filled Polyester
- Flammability Rating: UL 94V-0
- Cavity conforms to FCC rules and regulations PART 68, SUBPART F
- Lead Free soldering process available




RoHS Compliant

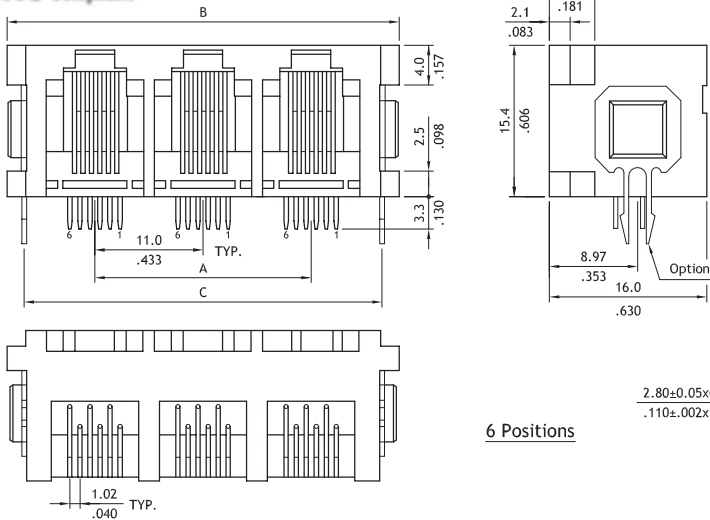

| Ports | Dimension | | |
|-------|-------------|-------------|-------------|
| | A | B | C |
| 2 | 11.0(.433) | 28.0(1.102) | 24.7(.972) |
| 3 | 22.0(.868) | 39.0(1.535) | 35.7(1.406) |
| 4 | 33.0(1.299) | 50.0(1.969) | 46.7(1.839) |
| 5 | 44.0(1.732) | 61.0(2.402) | 57.7(2.272) |
| 6 | 55.0(2.165) | 72.0(2.835) | 68.7(2.705) |
| 7 | 66.0(2.598) | 83.0(3.268) | 79.7(3.138) |
| 8 | 77.0(3.030) | 94.0(3.701) | 90.7(3.571) |

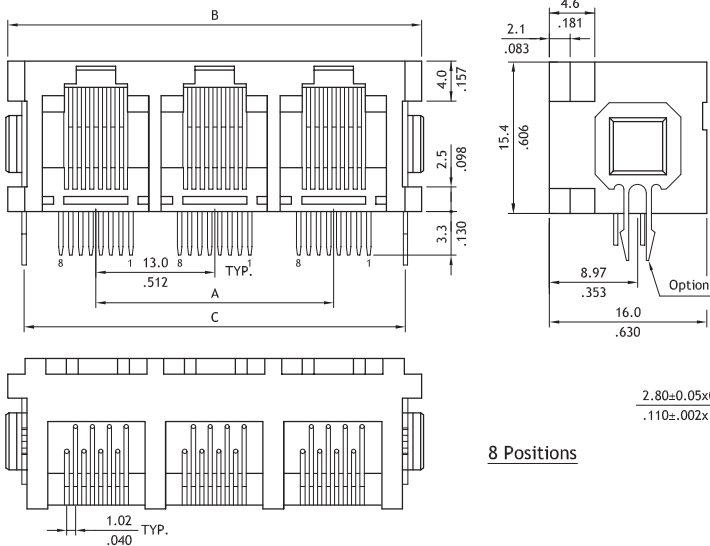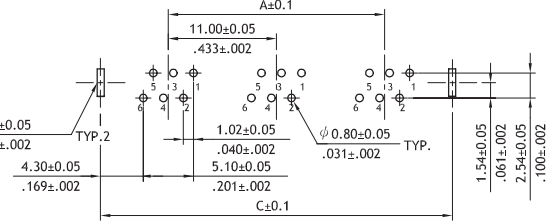

| Ports | Dimension | | |
|-------|-------------|-------------|-------------|
| | A | B | C |
| 1 | - | 19.3(.760) | 15.8(.622) |
| 2 | 13.0(.512) | 32.3(1.272) | 28.8(1.134) |
| 3 | 26.0(1.024) | 45.3(1.783) | 41.8(1.646) |
| 4 | 39.0(1.535) | 58.3(2.295) | 54.8(2.157) |

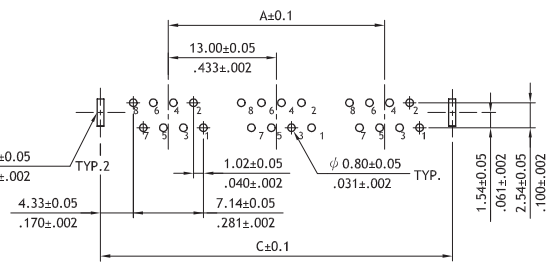

Ordering Code

1 **2** **3** **4** **5** **6**
C J 3 0 **8 8** **2** ***** **9** **0 0**

- 1** Series No.
- 2** Contacts:
66= 6P6C , 64= 6P4C
62= 6P2C , 88= 8P8C
- 3** Plating code:
2= Gold flash over Nickel
*Optional plating available but MOQ requested
- 4** Ports: See drawing
- 5** Color code: 9= Gray
- 6** PCB pegs options:
00= with metal pegs (standard)
P0= Without metal pegs
*Special options consult manufacturer