


# BAR GRAPH ARRAYS

Kingbright®

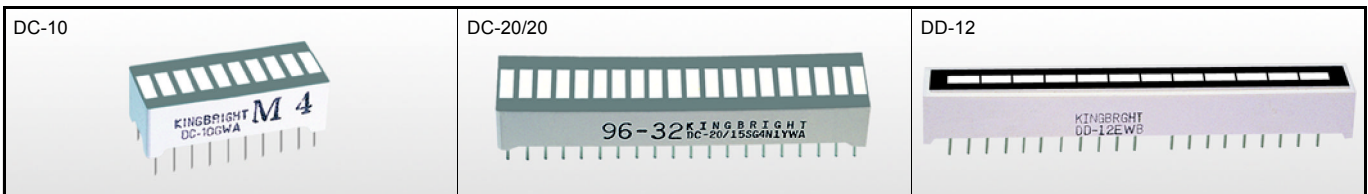

Part No.	Emitting Color Wavelength(nm) Material	Iv (ucd) @10mA		Description	Dimension
		Min.	Max.		

DC-10EWA	Hi. Eff. Red 625nm GaAsP/GaP	2200	5600	10 Segments Bargraph-Display	
DC-10GWA	Green 565nm GaP	2200	5600	10 Segments Bargraph-Display	
DC-10YWA	Yellow 590nm GaAsP/GaP	2200	5600	10 Segments Bargraph-Display	
DC-10SRWA	Super Bright Red 660nm GaAlAs	5600	31000	10 Segments Bargraph-Display	
DC-7G3HWA	Green 565nm GaP	2200	5600	10 Segments Bargraph-Display	
	Bright Red 700nm GaP	900	2200	7 x Green 3 x Red	

DC-20/20EWA	Hi. Eff. Red 625nm GaAsP/GaP	2200	5600	20 Segments Bargraph-Display	
DC-20/20GWA	Green 565nm GaP	2200	5600	20 Segments Bargraph-Display	
DC-20/20YWA	Yellow 590nm GaAsP/GaP	2200	5600	20 Segments Bargraph-Display	
DC-20/20SRWA	Super Bright Red 660nm GaAlAs	5600	31000	20 Segments Bargraph-Display	

DD-12HWB	Bright Red 700nm GaP	230	470	12 Segments Bargraph-Display	
DD-12GWB	Green 565nm GaP	1000	2000	12 Segments Bargraph-Display	
DD-12YWB	Yellow 590nm GaAsP/GaP	1300	2700	12 Segments Bargraph-Display	

**NOTES :**

1. All dimensions are in millimeters (inches)
2. Tolerance is ±0.25mm(0.01") unless otherwise noted.