


## Sealed Polycarbonate Enclosures Series 200

These enclosures meet IP65 specifications and are ideal for use in the electrical and electronic industries. Series 200 enclosures are offered in two different versions, light grey body and lid or light grey body and clear lid, now available in 25 different sizes.

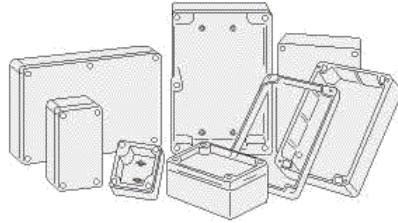

### Technical data:

Material	:	Polycarbonate (Standard)
Colour	:	Grey lid, grey or transparent (other colors available)
Temperature	:	-40 - +100 °C
Sealing	:	IP65 IEC529 (dust and hoseproof)
Assembling	:	4 screws
Wall thickness	:	3,5 mm
Self-extinguishing	:	Acc. to UL94-V2

### Design features:

- Wall mounting holes and cover attaching screws are outside the sealing, thus preventing ingress of moisture and dust.
- Internal bosses allow mounting of PCB horizontally or for connection of terminals, etc., to threaded brass inserts.
- Cover screws are M4 stainless steel, non-magnetic and fasten into threaded brass inserts.
- The lid and base are fitted together with a tongue and groove sealing system with a neoprene gasket.
- Available with silver coating on the internal surface which improve EMI and RFI shielding of the enclosure. All types are also available as low cost and environmental friendly models in ABS without threaded brass inserts with specifications according to UL94-V0.

Type	Grey body / lid	Grey body / clear lid	Weight Gram. (Approx.)	External Dimensions / See Specifications				
				L	W	H	A	B
201	p/n 2069201001	p/n 2069201002	71 g	64	58	35	25	10
203	p/n 2069203001	p/n 2069203002	113 g	113	65	40	25	15
205	p/n 2069205001	p/n 2069205002	142 g	115	65	55	40	15
212	p/n 2069212001	p/n 2069212002	156 g	115	90	55	40	15
214	p/n 2069214001	p/n 2069214002	284 g	171	121	55	40	15
218	p/n 2069218001	p/n 2069218002	439 g	222	146	55	40	15
221	p/n 2069221001	p/n 2069221002	226 g	115	90	80	65	15
223	p/n 2069223001	p/n 2069223002	413 g	171	121	80	40	40
229	p/n 2069229001	p/n 2069229002	249 g	195	80	55	45	10
232	p/n 2069232001	p/n 2069232002	598 g	222	146	75	40	35
238	p/n 2069238001	p/n 2069238002	795 g	265	185	95	75	20
250	p/n 2069250001	p/n 2069250002	45 g	52	50	35	25	10
256	p/n 2069256001	p/n 2069256002	137 g	82	80	55	40	15
258	p/n 2069258001	p/n 2069258002	220 g	160	80	55	55	15
265	p/n 2069265001	p/n 2069265002	277 g	160	80	85	70	15
269	p/n 2069269001	p/n 2069269002	404 g	200	120	75	60	15
278	p/n 2069278001	p/n 2069278002	237 g	120	120	60	30	30
279	p/n 2069279001	p/n 2069279002	305 g	120	120	90	60	30
287	p/n 2069287001	p/n 2069287002	366 g	160	160	60	30	30
288	p/n 2069288001	p/n 2069288002	433 g	160	160	90	60	30
2018	p/n 2069201801	p/n 2069201802	630 g	240	160	90	60	30
2025	p/n 2069202501	p/n 2069202502	775 g	240	160	120	90	30
2029	p/n 2069202901	p/n 2069202902	1150 g	300	230	86	56.5	30
2038	p/n 2069203801	p/n 2069203802	1450 g	300	230	111	56.5	55
2058	p/n 2069205801	p/n 2069205802	1650 g	360	200	150	100	50

L = Length

W = Width

H = Height

All measurements are in mm.