Customer:	Customer NO.:	Customer Approve By:

REV.	DESCRIPTION OF MODIFY	MODIFY BY:	DATE
A0	1'ST,DESIGN	DZQ	2011.07.27

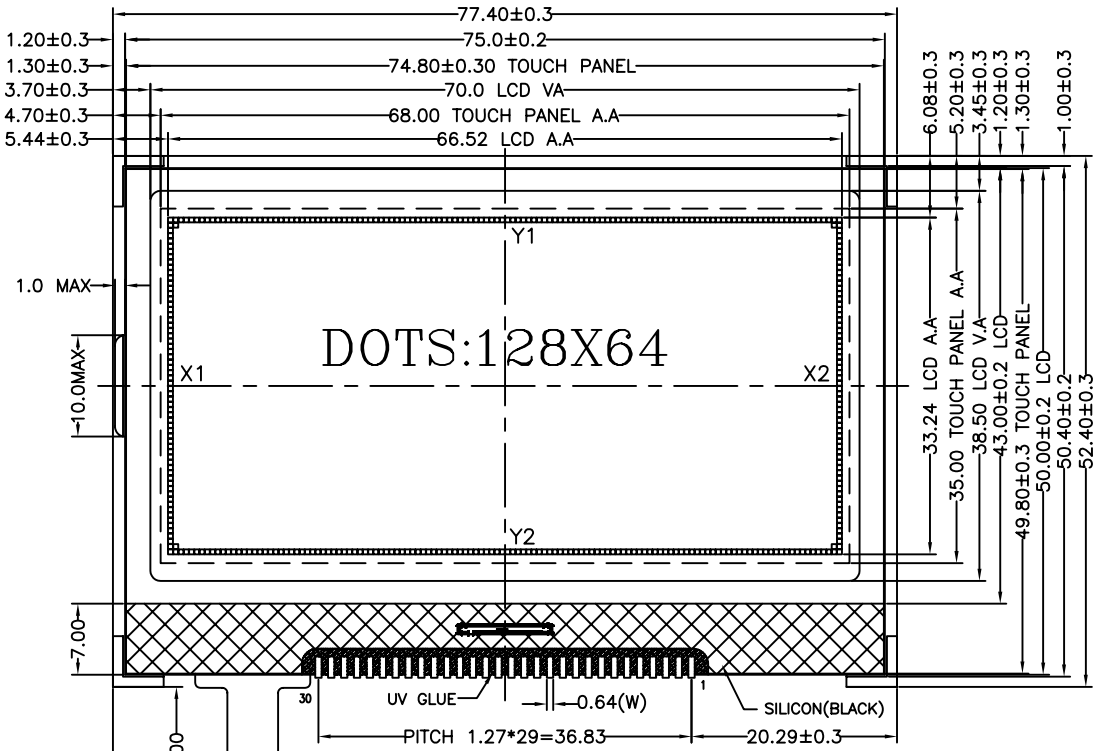

VIEWING DIRECTION

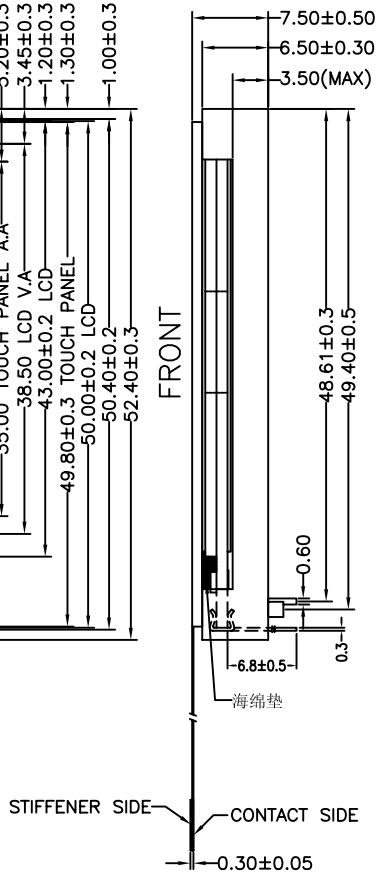



SCALE 20:1

COG PINOUT :

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
CS1B	RST	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	VDD	VDD
16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
VSS	VOUT	NC	C3+	C1-	C1+	C2+	C2-	V4	V3	V2	V1	V0	C86	PS

TOUCH PANEL PINOUT SYMBOL :

1	2	3	4
X1	Y2	X2	Y1

LOGIC ROUTING :

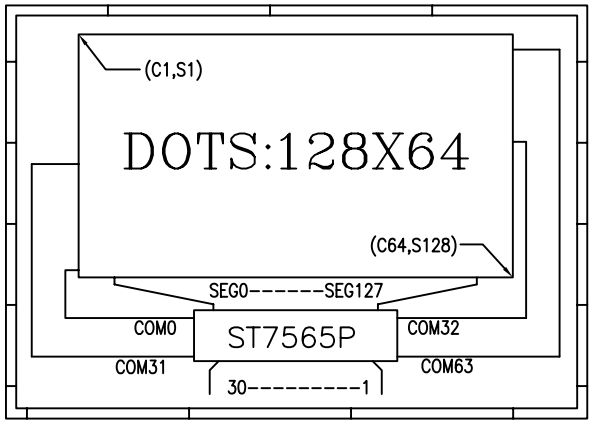

NOTE:

1.DISPLAY TYPE:	FSTN\POSITIVE
2.LCD POLARIZER TYPE:	TRANSFLECTIVE
3.VIEWING DIRECTION:	6.00 O'CLOCK
4.LCD OPERATING VOLTAGE:	VDD=3.3V;VOP=9.0V
5.OPERATING TEMP:	-20~+70°C
.STORAGE TEMP:	-30~+80°C
6.DRIVE METHOD	1/65DUTY,1/9BIAS
7.LCD CONNECTOR:	COG/PIN+BL
8.DISPLAY DRIVER:	ST7565P
9.BACK LIGHT:	White Edge(LED*4)
10.Unspecified tolerance is ±0.20mm	
11.ROHS Request	



TOUCH PANEL
CIRCUIT DIAGRAM

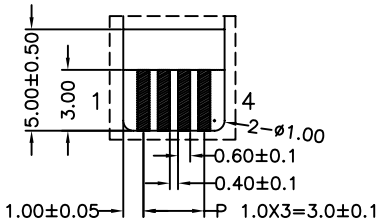

DETAIL "A"
SCALE 4:1

深圳市科万宏电子有限公司
FORMIKE ELECTRONIC COMPANY LIMITED

CD

UNIT: MM | SIZE: A4

SHEET: 1 OF 1

LCM NO.: WG1206H8FSW6G	DWG NO.: WG1206H8FSW6G-CD	REV: A0

DRAWN BY :		CHECKED BY :		APPROVED BY :	