
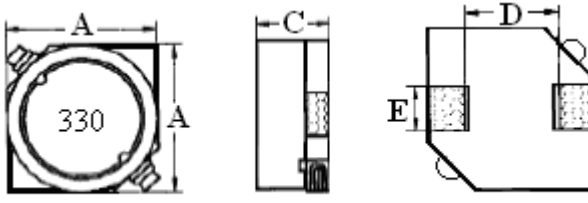


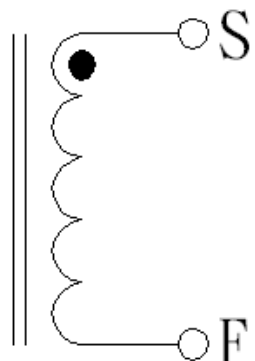





# SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:	
PART NO: SPI0705-330M		DWG.NO: MY8107273	
CUSTOMER PART NO:		CUST.DWG.NO:	
(1) DIMENSION(UNIT: mm)  		A	7.0 ± 0.2 m/m
		C	4.5 ± 0.3 m/m
		D	4.9 (REF) m/m
		E	2.0 (REF) m/m
		F	m/m
		G	m/m
		H	m/m
		I	m/m
		J	m/m
		K	m/m
		(2)ELECTRICAL REQUIREMENTS	
L (uH)	33 ± 20%		
RDC (Ω)	0.15 (MAX)		
IDC (A)	1.28 (MAX)		
TEST CONDITION	1KHZ / 0.5V		
(4)REMARK CORE:R5A DR5.4×4(S) B2.5 F2.5 , RI6.8×3.7×5.8 WIRE:2UEW Φ0.27×26.5Ts BASE:C-0034-1		APPROVED BY 	
		CHECKED BY 	
		DRAWN BY 	

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288    FAX:886-2-8919-1298    WEB:www.coremaster.com.tw

# TEST DATA

CUSTOMER:				DATE:			
PART NO: SPI0705-330M				DWG.NO: MY8107273			
CUSTOMER PART NO :				CUST.DWG.NO :			
TEST CONDITION: 1KHZ / 0.5V				DIMENSION (UNIT : mm)			
ITEM	L (uH)	RDC (Ω)	IDC (A)	A	C		
SPEC	33 ± 20%	0.15 (MAX)	1.28 (MAX)	7.0 ± 0.2	4.5 ± 0.3		
1	32.3	0.116	OK	6.93	4.53		
2	32.4	0.116	OK	6.97	4.52		
3	34.1	0.116	OK	6.97	4.54		
4	33.6	0.117	OK	6.89	4.61		
5	31.7	0.116	OK	6.93	4.55		
6	31.3	0.114	OK	6.91	4.57		
7	32.7	0.114	OK	6.97	4.60		
8	33.4	0.117	OK	6.99	4.57		
9	31.6	0.116	OK	6.95	4.58		
10	31.4	0.116	OK	6.97	4.58		
$\bar{X}$	32.45	0.116		6.948	4.565		
R	2.8	0.003		0.1	0.09		
TEST INSTRUMENTS DV-6021 LCR METER VR-131 RDC METER VR116+VR7220 BA/S CURRENT				APPROVED BY			
							
				CHECKED BY			
							
				DRAWN BY			
							

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288    FAX:886-2-8919-1298    WEB:www.coremaster.com.tw