
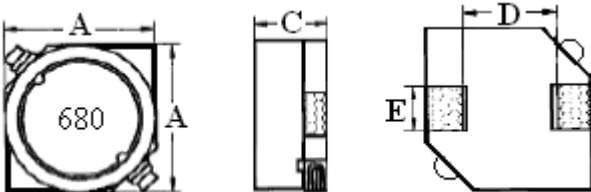


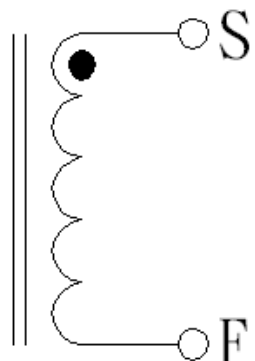





SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:	
PART NO: SPI0705-680M		DWG.NO: MY8103141	
CUSTOMER PART NO:		CUST.DWG.NO:	
(1) DIMENSION(UNIT: mm) 		A	7.0 ± 0.2 m/m
		C	4.5 ± 0.3 m/m
		D	4.9 (REF) m/m
		E	2.0 (REF) m/m
		F	m/m
		G	m/m
		H	m/m
		I	m/m
		J	m/m
		K	m/m
		(2)ELECTRICAL REQUIREMENTS	
L (uH)	68 ± 20%		
RDC (Ω)	0.19 (MAX)		
IDC (A)	0.7 (MAX)		
TEST CONDITION	1KHZ / 0.5V		
		APPROVED BY 	
		CHECKED BY 	
		DRAWN BY 	

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER:				DATE:									
PART NO: SPI0705-680M				DWG.NO: MY8103141									
CUSTOMER PART NO :				CUST.DWG.NO :									
TEST CONDITION: 1KHZ / 0.5V				DIMENSION (UNIT : mm)									
ITEM	L (uH)	RDC (Ω)	IDC (A)	A	C								
SPEC	68 ± 20%	0.19 (MAX)	0.7 (MAX)	7.0 ± 0.2	4.5 ± 0.3								
1	68	0.17	OK	7.02	4.50								
2	66	0.18	OK	7.00	4.51								
3	66	0.17	OK	7.01	4.51								
4	68	0.17	OK	7.00	4.51								
5	66	0.17	OK	7.11	4.51								
6	68	0.17	OK	7.11	4.53								
7	66	0.17	OK	6.99	4.54								
8	67	0.17	OK	7.01	4.54								
9	67	0.17	OK	7.00	4.55								
10	67	0.17	OK	7.12	4.55								
\bar{X}	66.90	0.17		7.04	4.53								
R	2.00	0.01		0.13	0.05								
TEST INSTRUMENTS DV-6021 LCR METER VR-131 RDC METER VR116+VR7220 BA/S CURRENT				APPROVED BY									
								CHECKED BY					
								DRAWN BY					

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw