



PLUGGABLE TERMINAL BLOCKS

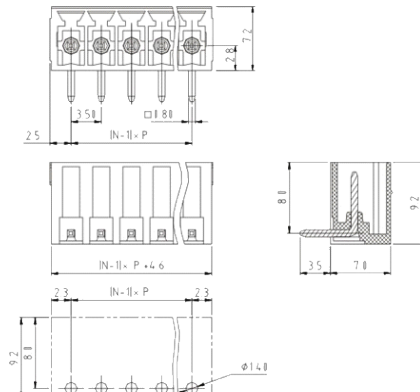

EC501R-3.5/3.81


Pitch: 3.5mm, 3.81mm

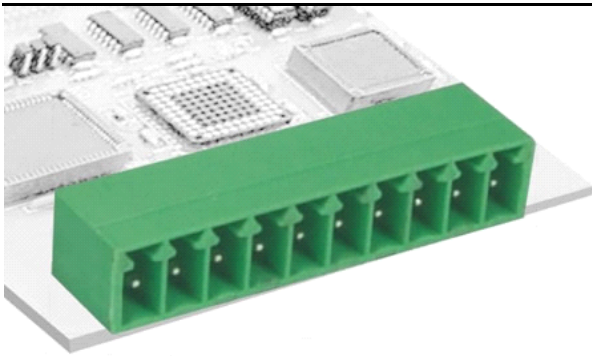

N: Number of poles P: Pitch

Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Withstanding voltage	AC2000V/1Min	
Ambient temperature	-40°C~+105°C	
Pitch	3.5mm(.138") 3.81mm(.150")	
Poles	2P-24P	
Housing	PA66,UL94V-0	
Cage	Brass,Tin plated	

HOW TO ORDER

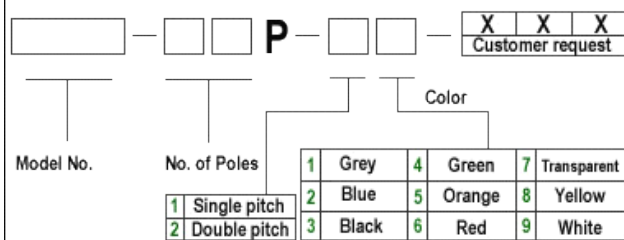

EG:

