




RINGKERNE R34/20,5/12,5 **RING CORES R34/20.5/12.5**

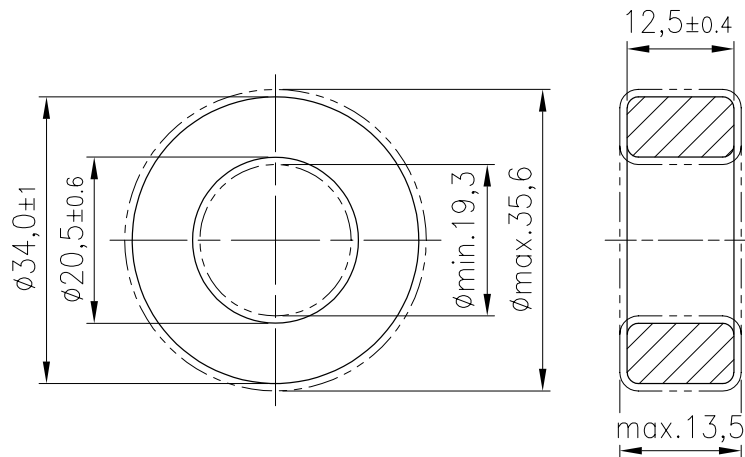

Formkonstanten / core factors

Formfaktor / <i>core factor</i>	C_1	=	1,00	mm ⁻¹
Eff. magn. Weglänge / <i>eff. magn. path length</i>	l_e	=	82,1	mm
Eff. magn. Querschnitt / <i>eff. magn. cross section</i>	A_e	=	82,4	mm ²
Eff. magn. Volumen / <i>eff. magn. volume</i>	V_e	=	6760	mm ³
Gewicht / <i>weight</i>	G	≈	32,5	g

Material <i>material</i>	A_L -Wert <i>A_L value</i>	Toleranz <i>tolerance</i>		Bestellnummer <i>code number</i>
		unbeschichtet <i>uncoated</i>	beschichtet <i>coated</i>	
K 2004	2500 nH	± 25 %	± 25 %	xxx 342012 024
K 2006	2650 nH	± 25 %	± 25 %	xxx 342012 026
K 4000	5050 nH	± 25 %	± 25 %	xxx 342012 004
K 5500	6050 nH	± 25 %	± 25 %	xxx 342012 055
K 6000	7550 nH	± 25 %	± 30 %	xxx 342012 006

xxx = 318: unbeschichtet / uncoated

xxx = 317: Parylene beschichtet (für Ringkerne ≤ 6 mm Außendurchmesser)
parylene coated (for ring cores ≤ 6 mm outer diameter)
Lack beschichtet (für Ringkerne > 6 mm Außendurchmesser)
lacquer coated (for ring cores > 6 mm outer diameter)