




RM 14
RM 14

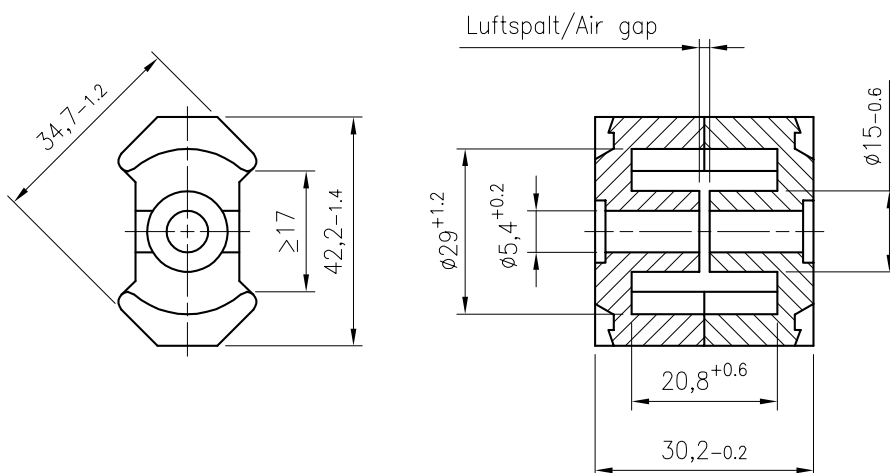

165

Magn. Formkenngrößen/Satz / eff. magn. parameters/set

Formfaktor / core factor	C_1	=	0,40	mm ⁻¹
Eff. magn. Weglänge / eff. magn. path length	l_e	=	71,0	mm
Eff. magn. Querschnitt / eff. magn. cross section	A_e	=	178,0	mm ²
Min. Kernquerschnitt / min. cross section	A_{min}	=	-	mm ²
Eff. magn. Volumen / eff. magn. volume	V_e	=	12600	mm ³
Gewicht / weight	G	≈	61,0	g

A_L -Wert A_L value nH	Toleranz tolerance	Werkstoff material	Luftspalt airgap mm	μ_e	Bestellnummer order number
6000	± 25%	K 2005	-	≈ 1910	327 140000 025
5000	± 25%	K 2006	-	≈ 1590	327 140000 026
9200	± 25%	K 4000	-	≈ 2930	327 140000 004
1000	± 10%	K 2005	≈ 0,12	≈ 320	327 141000 025
630	± 5%	K 2005	≈ 0,23	≈ 200	327 140630 025
400	± 3%	K 2005	≈ 0,45	≈ 125	327 140400 025

Zubehör accessory	Typ type	Bestellnummer code number
Halteklammer (2 Stück erforderlich) clamp (2 pieces necessary)	RM 14	700 001401 309