


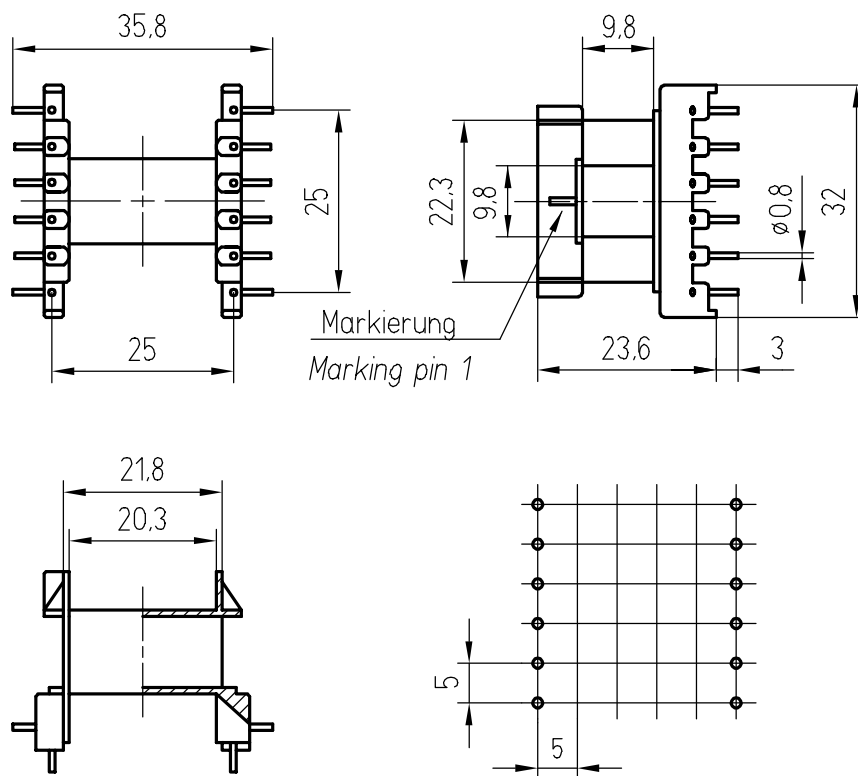

[mm]

A_N in mm ²	108,6
l_N in mm mittlere Weglänge average path length	65,5
max. Stifanzahl max. no. of pins	12
Standardmaterial Kunststoff standard plastic material	Polyamid (z.B. Ultramid)
Standardmaterial Anschlussstifte standard material pins	Nickel Silver CuNi18Zn20 (coating: 1µm Ni, 5-7 µm Sn 100)
Bestell.-Nr. Ordering no.	501 320 910 12A
Bemerkung remark	- -

Bestiftungsvarianten möglich / Pin connections variable

Schutzrecht nach DIN 34 beachten Copyright according to DIN 34				Freimaßtoleranzen ☐ DIN 7168 m ☒ DIN 16901		Oberfläche		Maßstab		Position Menge	
				Datum		Name		SP - E 32/9 - 1352 - 12B L-A			
Bearb. 05.11.2001		Eberwien									
Gepr.											
Norm											
KASCHKE KG GmbH & Co. 37079 Göttingen				SP 1352 K						Blatt	
										Blatt	
										Blatt	
										Blatt	
Zust. Änderungen		Datum		Name		Dateiname Sp1352K					