


T:1.6 Dimensions of PC board holes

Tolerance : ± 0.1 (Printed-top view)

LEAD FREE

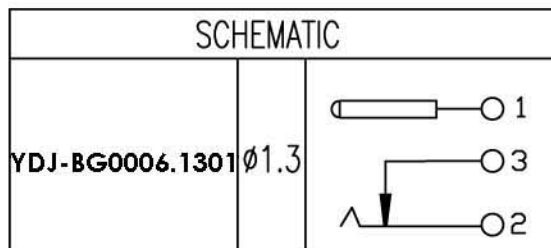

| | | | | |
|-----|-------------|-----|-------------------|--------------------|
| 5 | HOUSING | 1 | PA9T | UL-94V0(BLACK) |
| 4 | PIN | 1 | H59(COPPER ALLOY) | MB:Cu Cu/Sn PLATED |
| 3 | TERMINAL 3# | 1 | C2680 t=0.25 | MB:Ni Ag PLATED |
| 2 | TERMINAL 2# | 1 | C5191 t=0.30 | MB:Ni Ag PLATED |
| 1 | TERMINAL 1# | 1 | C2680 t=0.30 | MB:Ni Ag PLATED |
| LTR | PART NAME | QTY | MATERIAL | REMARK |

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.2

| Rev. | Date | Description | P/N | Remark |
|--|----------|-------------|---------------------------|-------------------|
| | | | YDJ-BG0006.1301 | |
| Title DC POWER JACK | | | Dwg. No. YDJBG0006.130101 | |
| Date | 20130515 | Rev. A | RoHS | ✓ |
| Unless otherwise specified, dimensions are in millimeters. | | | File AVT022 | Drw. b29 App. b29 |