R13-70.91

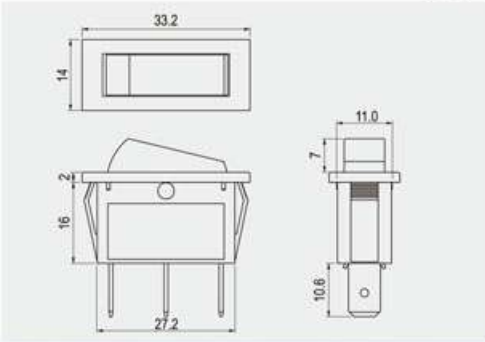

Rating
16A 125V AC 1/8HP 10A 250V AC 1/3HP
Contact resistance
50mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1500V 1 minute
Cut-out

X

Y

	X	Y
0.75~1.25	30.2-0.1	11.2+0.1
1.25~2	30.4-0.1	11.2+0.1
2~3	30.8-0.1	11.2+0.1

Cut-out for X8 ROCKER

	X	Y
0.75~1.25	30.2-0.1	11.2+0.1
1.25~2.0	30.4-0.1	11.2+0.1
2.0~3.0	30.8-0.1	11.2+0.1

FEATURES

* MATERIAL: Frame is nylon (UL flame: 94V-2). Terminals are silver plated brass.
* Illuminated actuators are molded in PC, available with red, amber, green, blue and white colors.
* Snap-in mounting, easy to install switch into panel.
* The dimension of frame is 33.2*14, for shorter dimension of frame 31.5*14, please refer to page 1-23, item NO. R13-221.
* Solder terminal is not available for function H & I.

Ordering number instruction

R13- □□ □□□ - □□

ROCKER

7 0

9 1

FUNCTION

Different position（動作特性不同）

A

C

D

Illuminated（帶燈）

B

Momentary / Illuminated （彈回/帶燈）

B F



Momentary（彈回）

F

H



I



Waterproof（防水）

A 8



B 8



B 8 F



C 8



D 8



F 8

TERMINAL

0 1 .250" SQ

0 5 SO
N/A for H,I