

CK-USB-04

IQRF Development Kit


Firmware v1.00

User's Manual



Description

CK-USB-04 is a development kit intended for programming and debugging of user applications based on IQRF transceiver modules. It can serve also as a final application.

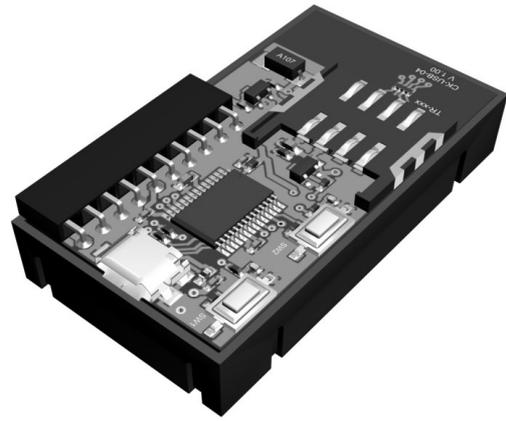


Applications

- Programmer for IQRF transceiver modules
- IQRF debugging kit
- End IQRF application host
- USB gateway
- USB to SPI converter
- PC connectivity

Key features

- Compatible with DDC (IQRF Development Daisy Chain) kits
- Supported by the IQRF IDE development environment
- SIM connector for transceiver module
- USB interface (custom device, MICRORISC VID & PID)
- I/O and power supply interface
- 2 pushbuttons, 2 LEDs
- Powered from USB or external supply
- Up to 5 devices controlled by IQRF IDEs on single PC
- Bootloader for firmware upgrade

Simplified schematics

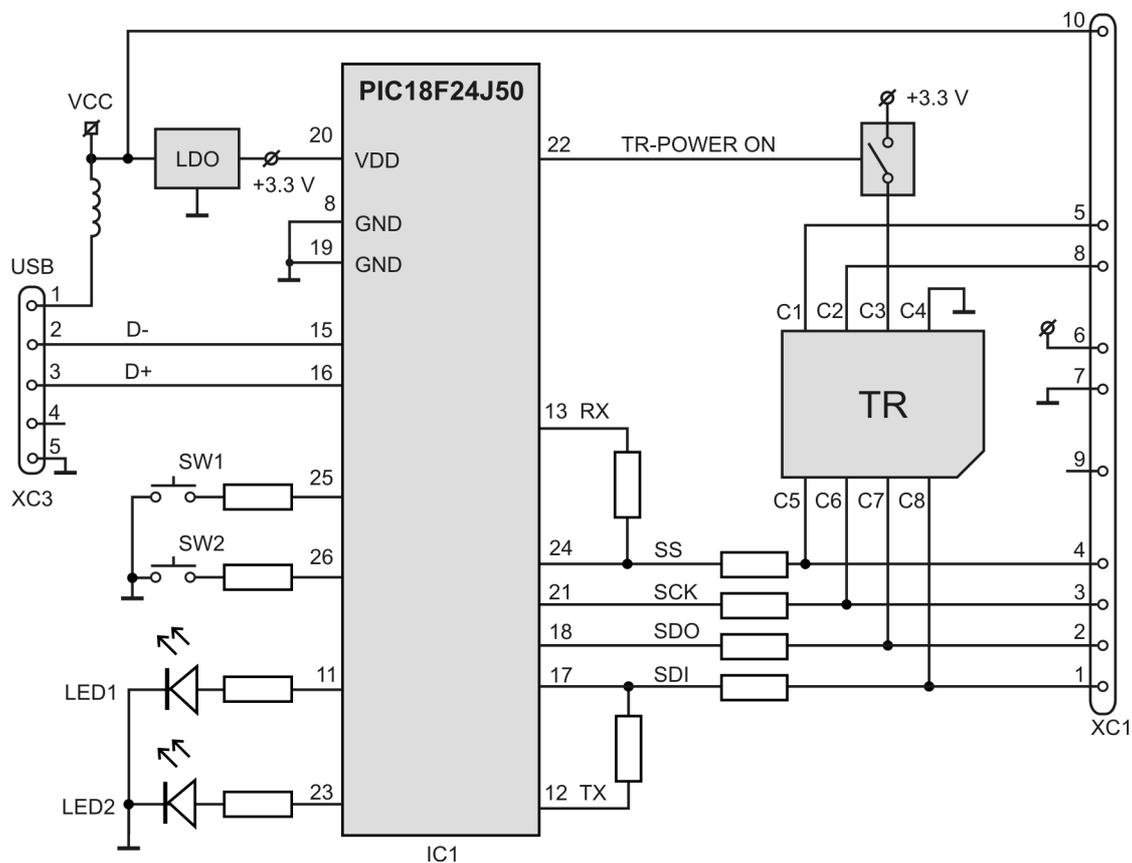

Control and indication

Pushbuttons


- SW1 – C5 pin control: pushed => C5 = log. 0. During SPI communication this pushbutton is ignored.
- SW2 – TR module power off (useful for TR reset and restart the application)

LEDs

- While a pushbutton is pressed the appropriate LED is on.
- LED2 flashes once after TR reset induced by IQRF IDE or pushbutton SW2.
- LED1 flashes 3x after clicking the IQRF logo in respective IQRF IDE (to identify the kit among other IQRF USB devices in case of multiple IQRF instances).
- Complementary LED1 and LED2 flashing in ~1 s period means missing firmware (see *Upgrade* below).

Connectors

- USB: micro USB
- SIM: supports TR-52B and all higher types of SIM-card sized IQRF transceiver modules.
- XC1: I/O / SPI / power interface. Female connector for square 0.635 mm, 2.54 mm pitch pins

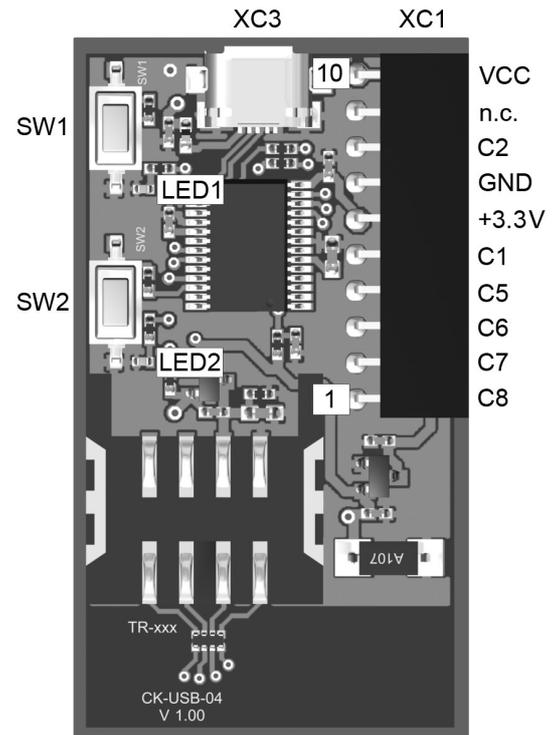

Caution: The TR module can be plugged / unplugged into / from the SIM connector while powered off only.

Tip: Use the SW2 pushbutton for this. The TR module is not powered while the SW2 pushbutton is held.

Electrical specifications

Power supply:

Supplied from USB:	5.0 V
Supplied via external power connector:	3.6 V – 5 V. 3.6 V battery recommended. USB must be disconnected in this case.

I/O and SPI voltage levels: 3.3 V

Operating temperature: 0 °C to +70 °C
-40 °C to +85 °C (Industrial) available on request

Size: 48 mm x 27 mm x 11 mm

Weight: 10 g

Absolute maximum ratings

Stresses above those values may cause permanent damage to the device. Exposure to maximum rating conditions for extended periods may affect device reliability.

Supply voltage:	5.5 V
Storage temperature:	-40 °C to +85 °C

Installing and application

See Application note AN003, IQRF IDE Help and IQRF application examples (www.iqrf.org).

Upgrade

CK-USB-04 firmware can be upgraded by the user with new versions released by the IQRF manufacturer. See Application note AN008 (www.iqrf.org/an008).

Product information

Pack list

- CK-USB-04 IQRF programmer & debugger (without a TR-module)

Recommended options

- CAB-USBABMICRO-100 Standard microUSB communication cable (USB A ↔ micro USB)

Ordering code

- CK-USB-04 IQRF development kit

Document history

- 110621 Minor bag in schematics corrected
- 110419 Absolute maximum ratings added
- 110210 First release

Sales and Service

Corporate office

MICRORISC s.r.o., Delnicka 222, 506 01 Jicin, Czech Republic, EU
Tel: +420 493 538 125, Fax: +420 493 538 126, www.microrisc.com

Partners and distribution

Please visit www.iqrf.org/partners

Quality management

ISO 9001 : 2000 certified

*Complies with ETSI directives EN 30279 V.1.2.1:99, ETS 30683:97, ETSI EN 301489-1:00,
ETSI EN 300220-1:00, ETSI EN 300390-2V.1.1.1:00*

Complies with FCC directives FCC CFR, Title 47, Part 15, Section 15.209, FCC CFR, Title 47, Part 15, Section 15.249

Complies with Directive 2002/95/EC (RoHS)



Trademarks

*The IQRF name and logo are registered trademarks of MICRORISC s.r.o.
PIC, SPI, Microchip, RFM and all other trademarks mentioned herein are property of their respective owners.*

Legal

All information contained in this publication is intended through suggestion only and may be superseded by updates without prior notice. No representation or warranty is given and no liability is assumed by MICRORISC s.r.o. with respect to the accuracy or use of such information.

Without written permission it is not allowed to copy or reproduce this information, even partially.

No licenses are conveyed, implicitly or otherwise, under any intellectual property rights.

The IQRF products utilize several patents (CZ, EU, US)

On-line support: <http://iq-esupport.com>



Smarter wireless. Simply.