


NYLON CABLE GLAND

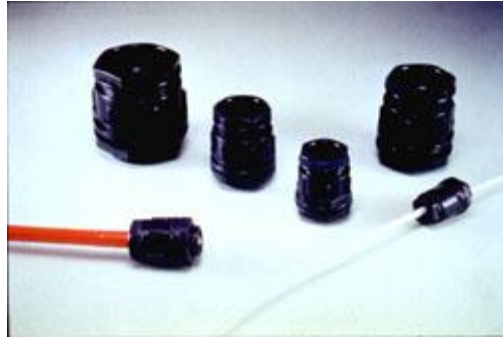


Material: UL approved Nylon 66, 94V-2 (Black)

Well designed for insulation, waterproof and impact resistant. Used extensively for protection and fixation of cables in control panel and apparatus.

Application:

1. Mount body to pre-drilled panel hole and fix it with locking nut.
 2. Insert cables through body and then seals consequently.
- Finally, Press them together with press nut to hold cable in position.

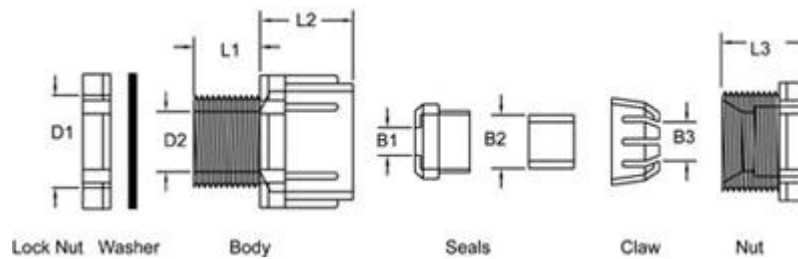

Item No.	D1(mm)	Pitch(mm)	D2(mm)	B1(mm)	B2(mm)	B3(mm)	L1(mm)	L2(mm)	L3(mm)	Cable Range (mm)
PG-16	16	1.5	10.5	.	7	10	12	17	16.5	5~10
PG-20	20	1.5	13.7	.	9	13	13	19	19.5	6~13