

SEALED ENCLOSURES


SERIES
200

These enclosures are designed to IP65 specifications and are ideal for use in the electrical and electronic industries for use where modern design is important. The moulded enclosures are offered in two different designs and a variety of colours.

The EURO version with designed curved lid and the ECO version with the classic flat lid. Both are available with label recess or without. The depth of the label recess can be changed to fit a thin label (0,3 mm) or a thicker keyfoil (1,1 mm).

DESIGN FEATURES:

- * Cover screws 1/4 turn or optional M4 stainless steel non-magnetic and fasten into threaded brass inserts
- * Wall mounting holes and cover attaching screws are outside the sealing, thus preventing ingress of moisture and dust.
- * The internal bosses for self tapping screws allow mounting of PCB horizontally or for connection of terminals, etc. are fully flexible and can be placed according to customers wishes on order. Brass inserts are optional.
- * The lid and base are fitted together with a tongue and groove sealing system with an gasket.
- * Low cost black non UL and other colours are available.
- * NEW also available in black.

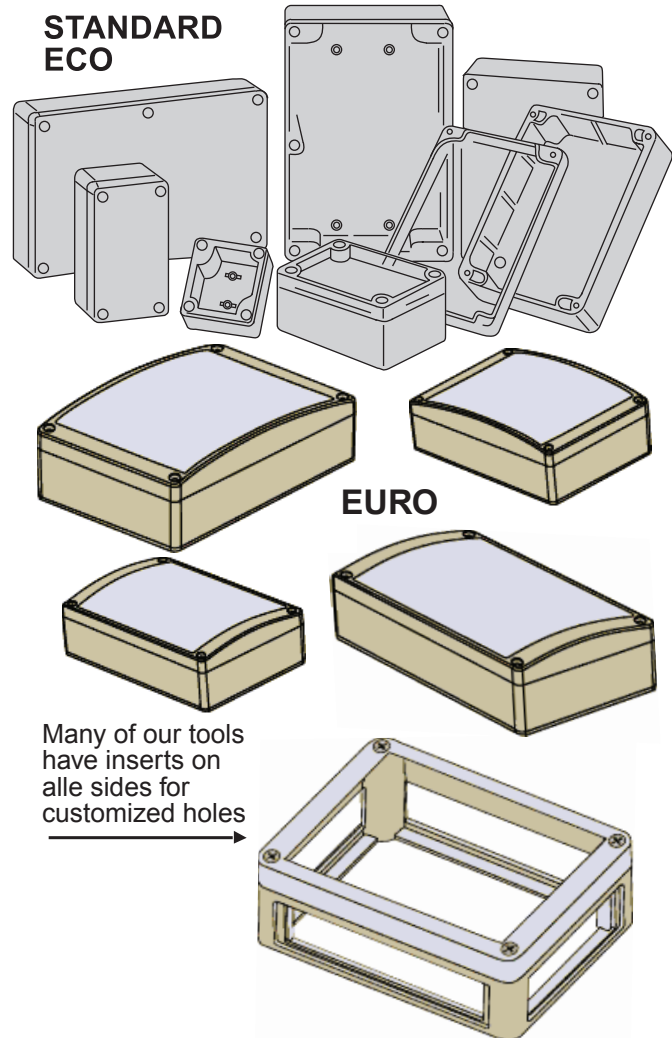

TECHNICAL DATA:

Material:	ABS Standard (PC on request)	Temperature:	- 40 - +75° C (-40 - +95° C)
Colour:	Grey, lid grey or transparent (RAL 7035)	Sealing:	IP65 IEC529 (Dust and hoseproof)
		Selfextinguishing:	Acc. to UL94-VO

Type	Standard ABS Grey body / lid	Standard ABS Grey body / clear lid	Weight Gram.Approx.	External Dimensions / See Specifications				
				L = Length	W = Width	H = Height	A	B
203 ECO	p/n 2069203216	p/n 2069203012	113 g	115	65	40	25	15
212 ECO	p/n 2069212121	p/n 2069212022	156 g	115	90	55	40	15
214 ECO	p/n 2069214421	p/n 2069214132	284 g	171	121	55	40	15
218 ECO	p/n 2069218001	p/n 2069218002	439 g	222	146	55	40	15
220 ECO	p/n 2069220211	p/n 2069220212	170 g	120	122	55	40	15
222 ECO	p/n 2069222211	p/n 2069222212	300 g	120	122	100	40	60
230 ECO	p/n 2069230211	p/n 2069230212	450 g	240	120	100	75	25
235 ECO	p/n 2069235001	p/n 2069235002	614 g	260	185	96	75	21
258 ECO	p/n 2069258131	p/n 2069258102	220 g	160	80	55	40	15
269 ECO	p/n 2069269001	p/n 2069269002	440 g	200	120	75	60	15
214 EURO	p/n 2069214421	p/n 2069214132	284 g	171	121	60	40	15
218 EURO	p/n 2069218101	p/n 2069218102	439 g	222	146	60	40	15
258 EURO	p/n 2069258131	p/n 2069258102	220 g	160	80	60	40	15

● All measurements are in mm.

Many more p/n available - please require