
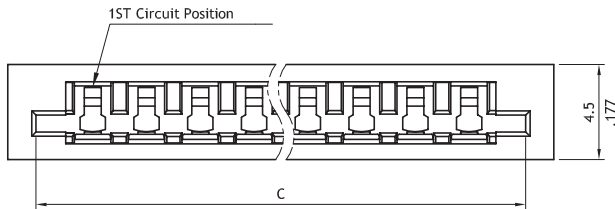


# CF14 Series 2.54mm(.100") DIP LIF FFC/FPC Connectors

- Dual contacts designed with Tin plated
- Insulation: Glass filled polyester UL 94V-0, Color Black



**RoHS** Compliant

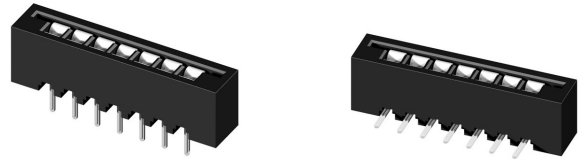



$$A = 2.54 \times \text{No. of Spaces}$$

$$B = A + 8.0$$


$$C = A + 5.9$$

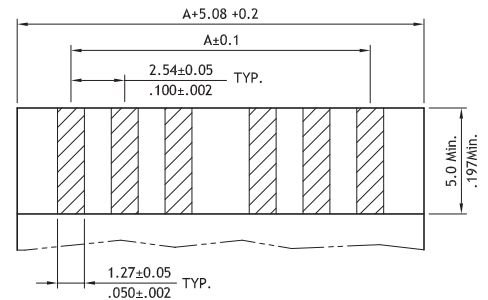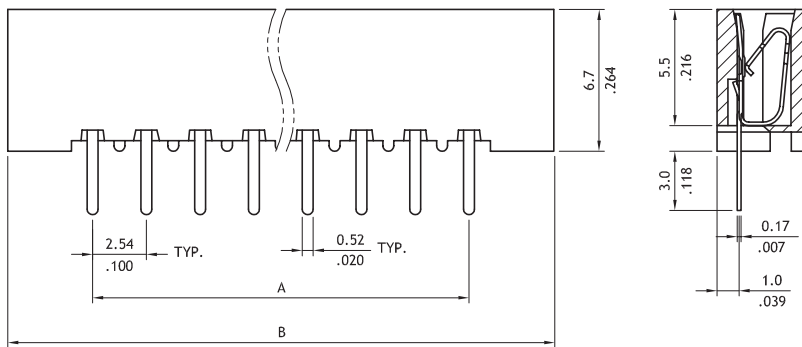

Accommodated FPC/FFC  
(Thickness: 0.3mm±0.05)

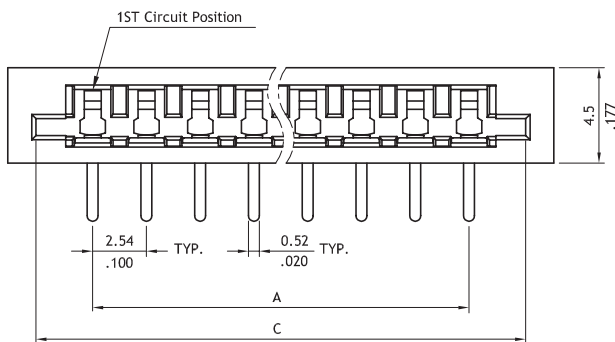

Recommended P.C. Board Layout

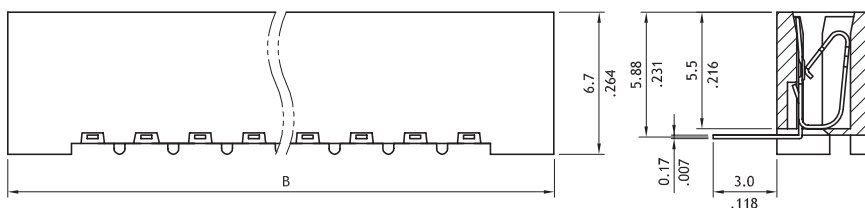

## Ordering Code

① **CF** ② **14** ③ **27** ④ **1** ⑤ **V** ⑥ **100**

- ① Series No.
- ② Circuits : 06 to 27
- ③ Plating code:  
1= Tin over Nickel

- ④ Entry options:  
V= Vertical  
H= Right angel

- ⑤ Other options:  
100= Color Black(Standard)  
\* Special options consult manufacturer