


Date code:
8 1 6 4
 year 2018 day: 1~7
 week: 1~52

REV.	DESCRIPTION	DRAWN	DATE
3	New frame	Willis	2012/08/03
4	ECR1800010 Add Rib	FROS	2018/05/10
5	ECR2200001	TIM	2022/01/12

SPECIFICATION:

1. ELECTRICAL
 - 1.1 Current Rating: 0.5A per pin
 - 1.2 Voltage Rating: 30V AC/DC
 - 1.3 Contact Resistance: 100mΩ
 - 1.4 Insulation Resistance: 1000MΩ
 - 1.5 Dielectric Withstanding Voltage: 500VAC
2. MECHANICAL
 - 2.1 Durability: 10,000 Cycle
 - 2.2 Insertion Force: 7N max.
3. ENVIRONMENTAL
 - 3.1 Operating temperature range: -40°C~+85°C
 - 3.2 Storage temperature range: -40°C~+85°C
4. SOLDER ABILITY
 - 4.1 Recommended IR-Reflow Temperature: 260°C

PIN DEFINITION						
NAME	C1	C2	C3	C5	C6	C7
TYPE	Vcc	RST	CLK	GND	Vpp	I/O

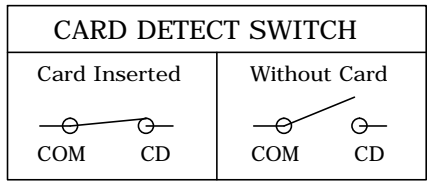

6	SPRING	SWP
5	CRANK	SUS304
4	SLIDER	LCP, UL94V-0, Black
3	SHELL	SUS304, Gold plating on solder tails, under plating: 50u" min. Nickel
2	CONTACT	Phosphor Bronze, Gold plating on contact area, 120u" min. Tin plating on solder tails, under plating 50u" min. Nickel
1	HOUSING	LCP, UL94V-0, Black

NO.	PART NAME	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
 www.attend.com.tw			
DRAWN	Willis	2009/01/10	
CHECKED	Angel	2009/01/10	
APPROVED	Ken	2009/01/10	
SCALE	SHEET	SIZE	DRAWN NAME:
2/1	1/1	A4	SIM Card Socket 6+ 2Pin Push-Push Type
PRODUCT NO.		115A-ADA0-R02	FILE NAME
115A-ADA0-R02_B_5			

RECOMMENDED LAYOUT (TOP VIEW) TRACE PROHIBITION AREA
 GENERAL TOLERANCE: ±0.05mm