


## WIRE STRIPPERS

Lap joint  
Special steel

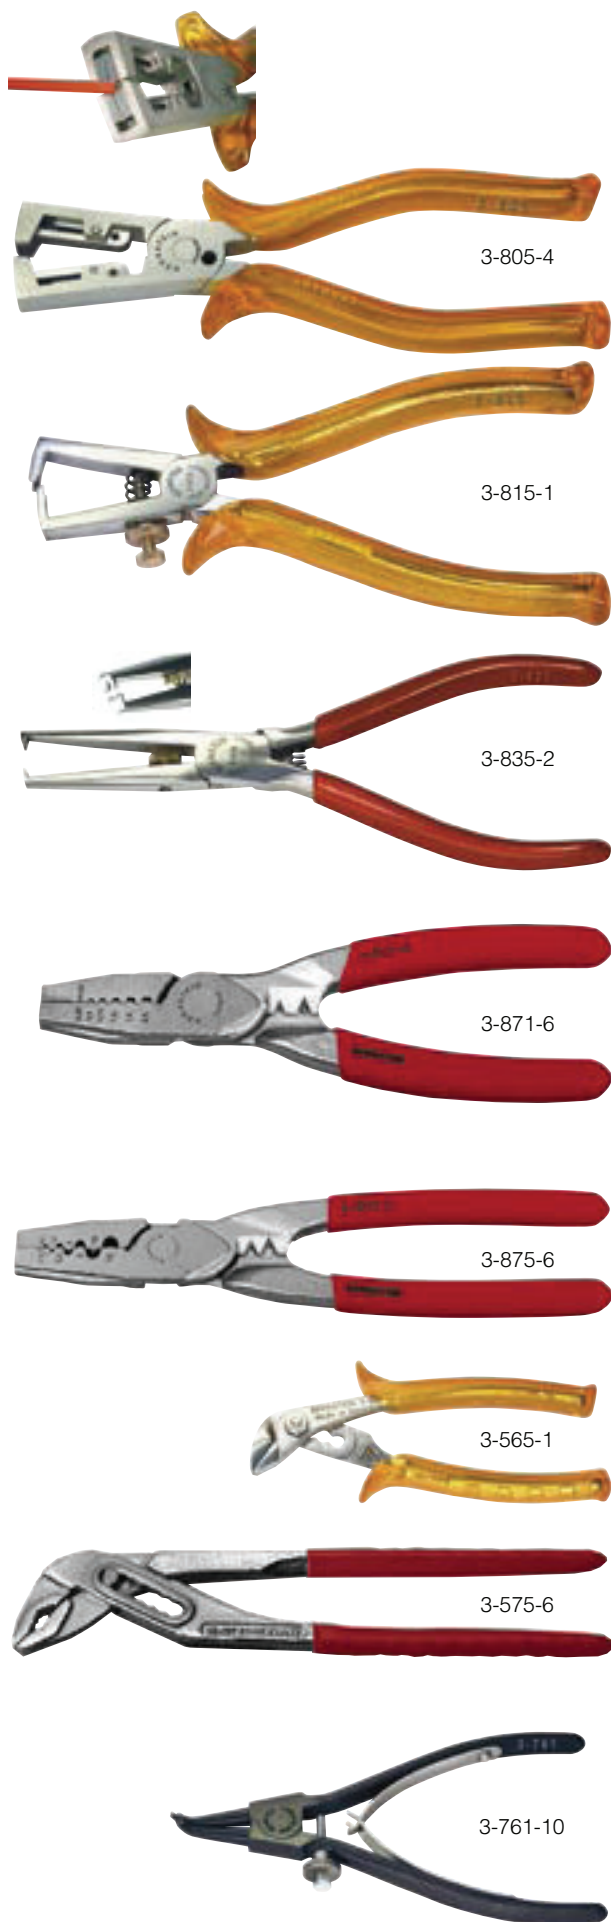

| No. | Length<br>mm | Length<br>inches | Finish | Weight<br>g |
|-----|--------------|------------------|--------|-------------|
|-----|--------------|------------------|--------|-------------|

### "Record" wire strippers

Spring system enables safe working with automatic adjustment to the wire size. Easy to use: insert wire - close pliers - remove insulation

|         |     |       |   |     |
|---------|-----|-------|---|-----|
| 3-805-4 | 160 | 6 1/4 | for wire thicknesses from 0.5 to 5 mm Ø<br>nickel-plated<br>with BERNSTEINIT-insulation   | 175 |
| 3-806-4 | 160 | 6 1/4 | for wire thicknesses from 0.3 to 1.2 mm Ø<br>nickel-plated<br>with BERNSTEINIT-insulation | 175 |

### Wire strippers with adjusting screw

for all wire thicknesses, with compression spring

|         |     |       |   |     |
|---------|-----|-------|---|-----|
| 3-815-1 | 155 | 6 1/8 | chrome plated polished<br>with BERNSTEINIT-insulation | 165 |
|---------|-----|-------|---|-----|

### Wire strippers for use in electronics

especially narrow and slim, with internal adjusting screw and compression spring

|         |     |       |  |     |
|---------|-----|-------|--|-----|
| 3-835-2 | 160 | 6 1/4 | chrome-plated, polished<br>with transparent insulation | 115 |
|---------|-----|-------|--|-----|

## PRESSING PLIERS

Lay-on joint  
Carbon steel



### Pressing pliers for multicore cable end

combined with cable cutter and stripping-prism for different cable dimensions for sleeves of 0.25 - 2.5 mm<sup>2</sup>.

|         |     |   |                                    |     |
|---------|-----|---|------------------------------------|-----|
| 3-871-6 | 155 | 6 | nickel-plated, with red insulation | 165 |
|---------|-----|---|------------------------------------|-----|

### Pressing pliers for multicore cable end

combined with cable cutter and stripping-prism for different cable dimensions for sleeves of 0.50 - 16.0 mm<sup>2</sup>.

|         |     |   |                                    |     |
|---------|-----|---|------------------------------------|-----|
| 3-875-6 | 225 | 9 | nickel-plated, with red insulation | 285 |
|---------|-----|---|------------------------------------|-----|

## WATER PUMP PLIERS

### Miniature water pump pliers with 3 adjustments

|         |     |       |                             |    |
|---------|-----|-------|-----------------------------|----|
| 3-565   | 130 | 5 1/8 | chrome-plated, polished     | 60 |
| 3-565-1 | 130 | 5 1/8 | with BERNSTEINIT-insulation | 80 |

### Water pump pliers

|         |     |       |   |     |
|---------|-----|-------|---|-----|
| 3-574-1 | 175 | 6 3/4 | matt chrome-plated<br>with BERNSTEINIT-insulation | 180 |
| 3-575-6 | 240 | 9 1/2 | nickel-plated, red insulation                     | 380 |

## SPECIAL ASSEMBLY PLIERS

### Model with adjusting screw and sprung handles

45° angular, for clamping rings on shafts without grooves 1.5-2.8 mm

|          |     |       |                |    |
|----------|-----|-------|----------------|----|
| 3-761-10 | 140 | 5 1/2 | fine burnished | 95 |
|----------|-----|-------|----------------|----|