



REV	REVISION RECORD	APPROVED
A	First Issue	

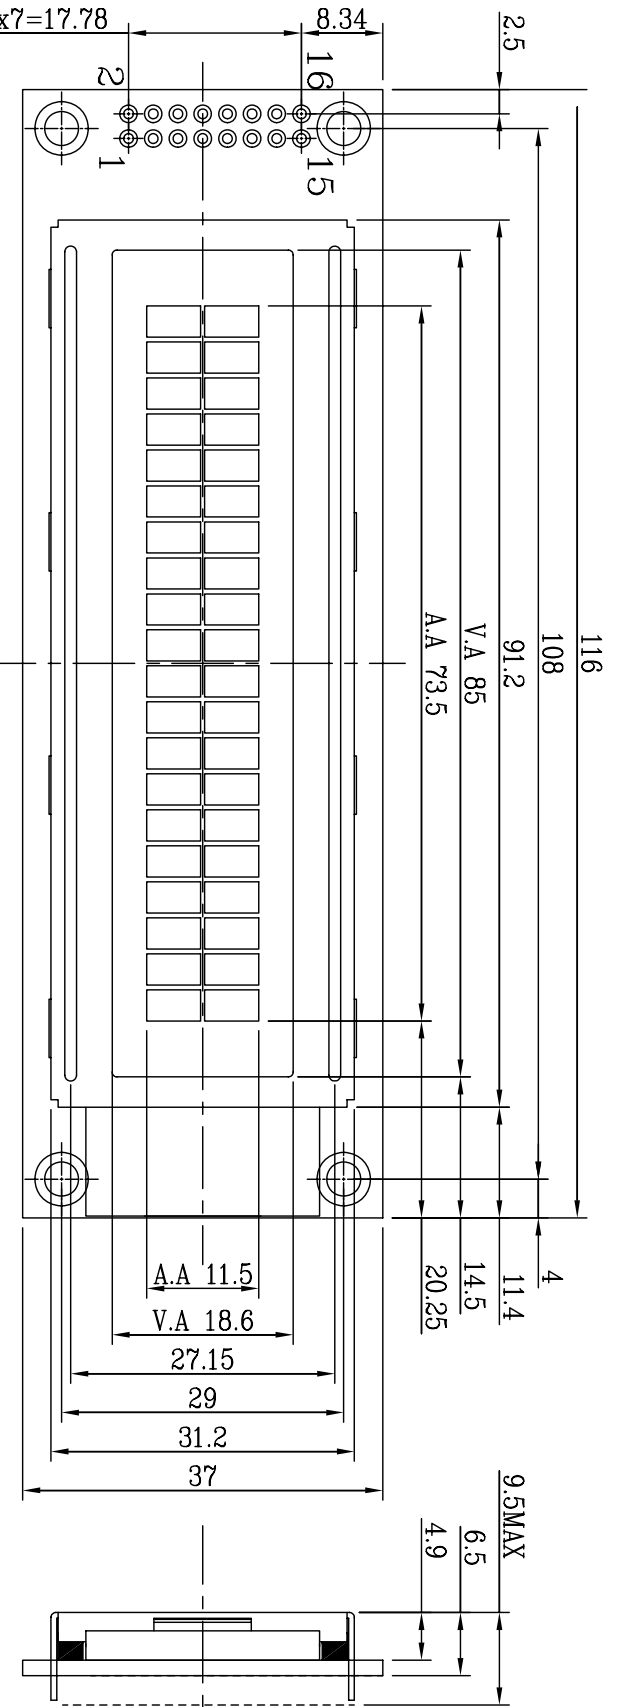

NO.	SYMBOL
1	VSS
2	Vdd
3	Vo
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A/Vee
16	K

- NOTES:
1. Display type:STN/YELLOW-GREEN
 2. Viewing direction:6 0°CLOCK
 3. Drive method:1/16DUTY 1/5BIAS
 4. Polarizer mode:Transflective/Positive
 5. LCD drive voltage:4.2V
 6. Operation temperature:-20°C~+70°C
 7. Storage temperature:-30°C~+80°C
 8. Driver/Controller IC:ST7066-0E(English and Italian)
 9. Logic power supply voltage:5.0V
 10. Backlight :Yellow-Green
 11. ROHS must be complied

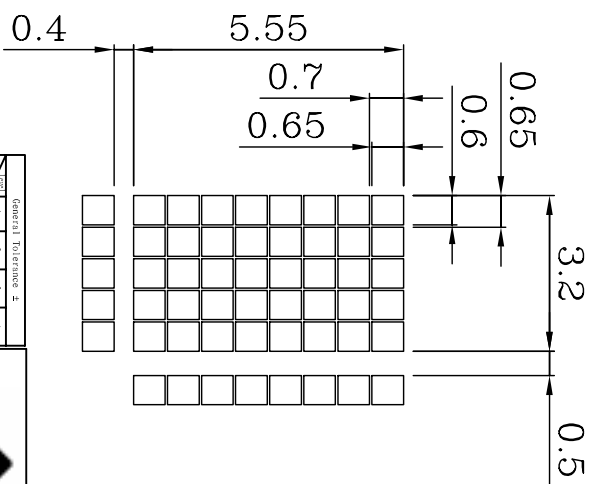

UNIT	1	2	3	4
mm	0.05	0.1	0.1	0.2
°	0.05	0.1	0.1	0.2
mm	0.05	0.1	0.2	0.3
mm	0.1	0.2	0.3	0.5
mm	0.1	0.2	0.3	0.8



SCALE	VERSION	DATE	MODEL NAME:
1/1	A	2007.11.12	WC2002A2SBX6B
UNIT	NO.	TITLE:	
mm	1/1	Outline	
CHECKED	DRAWN	FILE NAME:	