


INSTALLING THE  
RASPBERRY PI INTO  
THE 1593HAMPI  
ENCLOSURE

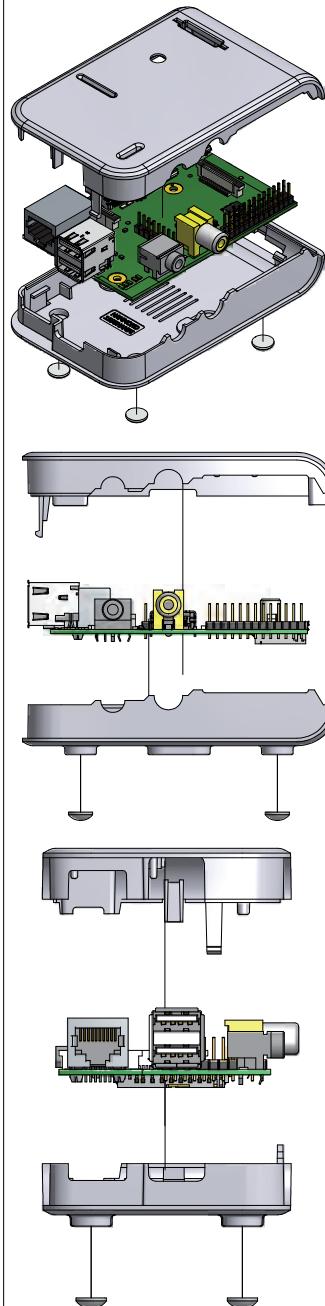

**STEP 1**  
TAKE THE BOTTOM  
PART OF THE  
ENCLOSURE AND  
INSERT THE  
DEVELOPMENT BOARD  
ON AN ANGLE AGAINST  
THE STATIONARY  
CLIPS.

**STEP 2**  
PUSH DOWN FIRMLY  
ON THE RCA JACK  
UNTIL YOU HEAR THE  
BOARD CLICK IN  
PLACE.

**STEP 3**  
TAKE THE TOP  
PART OF THE  
ENCLOSURE AND  
TOUCH THE TWO  
ROUNDED ENDS  
TOGETHER ON AN  
ANGLE.

**STEP 4**  
PUSH DOWN ON  
THE OUTER TOP  
EDGE OF THE  
ENCLOSURE UNTIL  
YOU HEAR A  
SNAPPING SOUND.

PLACE RUBBER  
ADHESIVE FEET IN  
THE CIRCLES ON  
THE BOTTOM OF  
THE ENCLOSURE.

TO DISASSEMBLE,  
PULL BACK CLIP  
ON THE BOTTOM  
AND SEPARATE  
CASE

