

RegloCard-Plus / Combifront

Enclosure with metric pre-punchings in the terminal compartment



RCPM 200 F

Order no.: 41201609

Pre-punchings: 1 x M 12, 4 x M 16, 1 x M 20

* = Available on request.

Characteristics

Colour of enclosure group

Light grey

Protection class

IP 65

Enclosure Material

ABS, PC; seal made of EPDM; UL 94 V0 types on request; for details see Technical Information

Scope of delivery

Base, recessed front lid, terminal compartment lid, screw covers, screws

Note


IP 65; RCPM 310 F to 400 F: IP 54. Enclosures in UL 94 V0 and/or without pre-punchings on request.

Dimensions

Dimensions

213 x 185 x 84 mm

Product drawing

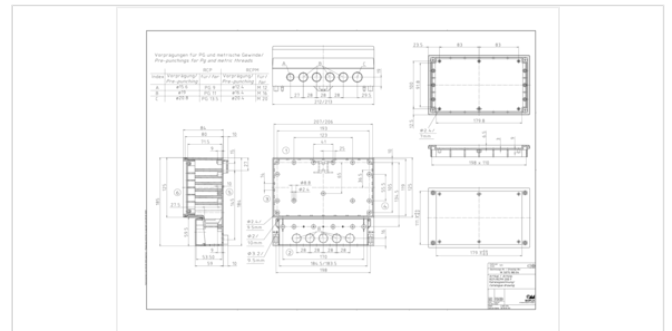

Technical documentation / Downloads

Technical drawings

3D product data in STEP format: 41201609 RCPM-200-F.stp (5.1 MB)

Drawing for mechanical processing: 41201609 RCPM-200-F-G.dxf (1.7 MB)

Milling contours are shown here as a DXF file. (Sub D, USB, HDMI, cable glands, ...)

Product drawing in PDF format: 41201609 RCPM-200-F.pdf (111.2 KB)

Product drawing in DXF format: 41201609 RCPM-200-F.dxf (961.4 KB)

Product information

reglocard-plus-combifront en.pdf (1.0 MB)

Important!

To compensate for pressure when temperatures change and cause moisture in the enclosure, we recommend that you use a pressure compensation element.

» Additional information

Matching accessories



Mounting panels, laminated paper

41000500 RCP/RCPM 200 M For RCP(M) 200(0) Brown



Wall brackets, screw-on at rear

41000309 RCP/RCPM - WL



Screws (SHR) and distance bolts (DIBLZ) for mounting bosses in plastic enclosures

59006190	SHR Z KA25x6	SD = 2,5 / ND = 2,0 / KD = 4,4
59006217	SHR Z KA30x8	SD = 3,0 / ND = 2,4-2,6 / KD = 6,0