
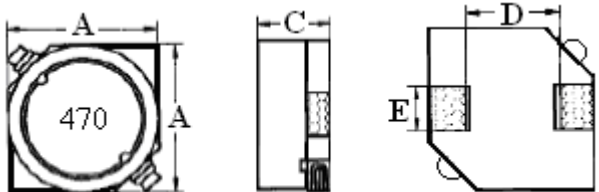


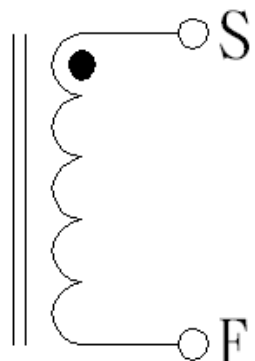





SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:			
PART NO: SPI0705-470M		DWG.NO: MY8111306			
CUSTOMER PART NO:		CUST.DWG.NO:			
(1) DIMENSION(UNIT: mm) 		A	7.0 ± 0.2 m/m		
		C	4.5 ± 0.3 m/m		
		D	4.9 (REF) m/m		
		E	2.0 (REF) m/m		
		F	m/m		
		G	m/m		
		H	m/m		
		I	m/m		
		J	m/m		
		K	m/m		
		(2) ELECTRICAL REQUIREMENTS		(3) SCHEMATIC	
		L (uH)	47 ± 20%		
RDC (Ω)	0.143 (MAX)				
IDC (A)	0.92 (MAX)				
TEST CONDITION	1KHZ / 0.5V				
		APPROVED BY 			
		CHECKED BY 			
		DRAWN BY 			

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER:				DATE:			
PART NO: SPI0705-470M				DWG.NO: MY8111306			
CUSTOMER PART NO :				CUST.DWG.NO :			
TEST CONDITION: 1KHZ / 0.5V				DIMENSION (UNIT : mm)			
ITEM	L (uH)	RDC (Ω)	IDC (A)	A	C		
SPEC	47 ± 20%	0.143 (MAX)	0.92 (MAX)	7.0 ± 0.2	4.5 ± 0.3		
1	47	0.133	OK	6.99	4.60		
2	46	0.133	OK	6.91	4.54		
3	48	0.132	OK	6.95	4.61		
4	46	0.133	OK	6.99	4.54		
5	47	0.132	OK	6.98	4.55		
6	48	0.131	OK	6.97	4.61		
7	48	0.133	OK	6.96	4.58		
8	47	0.131	OK	7.00	4.53		
9	46	0.131	OK	7.00	4.52		
10	47	0.132	OK	6.98	4.47		
X	47	0.132		6.973	4.555		
R	2	0.002		0.09	0.14		
TEST INSTRUMENTS DV-6021 LCR METER VR-131 RDC METER VR116+VR7220 BA/S CURRENT				APPROVED BY			
							
				CHECKED BY			
							
				DRAWN BY			
							

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw