
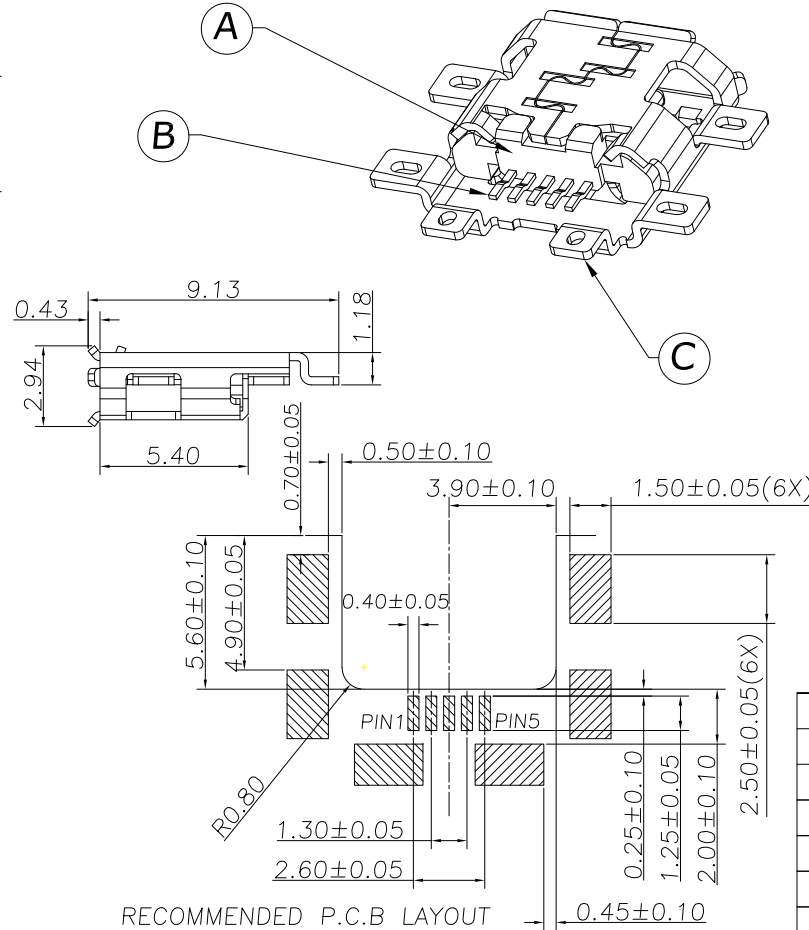
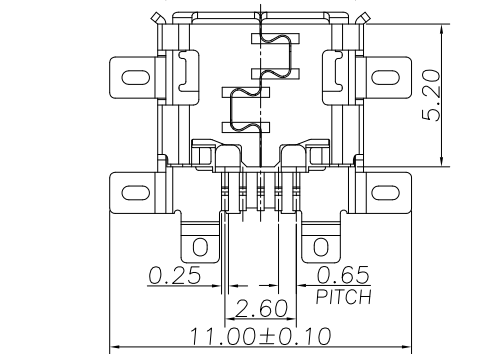
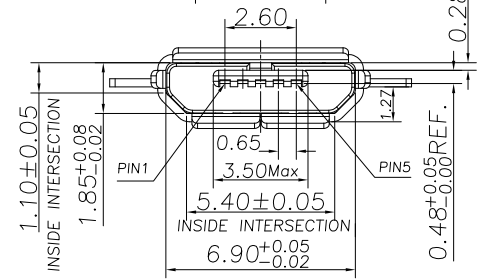


1	2	3	4	5	6	7	8	9	10
SWITCH CIRCUIT			MATERIAL AND FINISH AS BELOW						
WHEN CARD IS EJECTED		WHEN CARD IS INSERTED		A	Housing	LCP UL94V-0 Black		E	
				B	Contact	Brass C2680, Contact Area: Gold Flash		F	
				C	Shell	Stainless Steel SUS304,Nickel Plating		G	
				D				H	

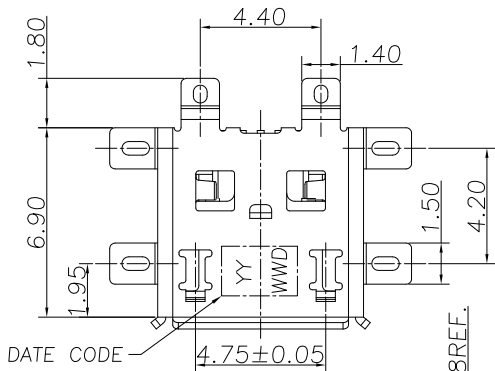

**SPECIFICATION:**

- ELECTRICAL**
  - Current Rating:** Signal(Pin2,3,4):1.0A  
Power(Pin1,5):1.8A
  - Voltage Rating:** 100V AC
  - Contact Resistance:** 50mΩ
  - Insulation Resistance:** 1000MΩ
  - Dielectric Withstanding Voltage:** 100VAC
- MECHANICAL**
  - Durability:** 10000 Cycle
  - Insertion Force:** 35N max.
  - Extraction Force:** 8~20N max.
- ENVIRONMENTAL**
  - Operating temperature range:** -20°C ~ +85°C
  - Storage temperature range:** -40°C ~ +85°C
- SOLDER ABILITY**
  - Recommended IR Reflow Temperature:** 260°C

P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12
PIN ASSIGNMENT											
207E-BA00-RA1		Micro USB B Middle Board Mount Type 1.27mm, Gold Flash									
PRODUCT NO.		DESCRIPTION									

UNLESS OTHERWISE SPECIFIED TOLERANCE		
ANGLES	ANG.	±5°
LINEAR	0.	±0.3
	0.0	±0.25
	0.00	±0.20
SCALE	AS SHOWN	UNIT: mm
DRAWN	Willis	2012/10/31
CHECKED	Angel	2012/10/31
APPROVED	Ken	2012/10/31

**ATTEND**

www.attend.com.tw

DRAWN NAME: Willis  
Micro USB B Receptacle Middle Board Mount Type

PRODUCT NO. 207E-BA00-RA1

- Revise:
- Revise:
- Revise:

REV.	DESCRIPTION	DATE	REV.	DESCRIPTION	DATE	SIZE	REV.	FILE NAME
1			4			A4	1.0	207E-BA00-RA1_B_1