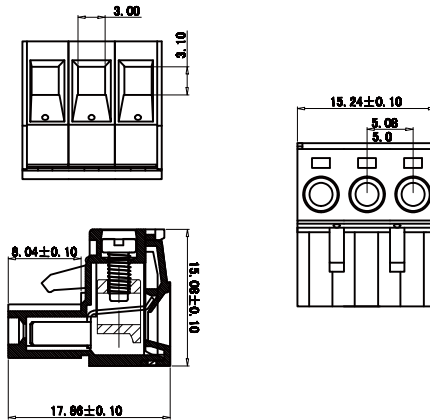
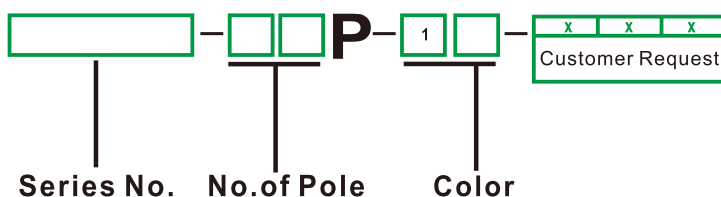


## PLUGGABLE TERMINAL BLOCKS


**EC201-5.0/5.08**
**Pitch: 5.0mm, 5.08mm**


Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	20A
Wire range	28-12AWG	2.5mm <sup>2</sup>
Withstanding voltage	AC2500V/1Min	
Torque	0.4Nm(3.5Lb-In.)	
Ambient temperature	-40°C~+105°C	
Strip length	7mm	
Pitch	5.0mm(.197") 5.08mm(.200")	
Poles	2P-24P	
Housing	PA66,UL94V-0	
Screws	M2.5,steel,Cr <sup>3+</sup> Zn plated	
Contact	Phosphor bronze	
Cage	Brass,Ni plated	

**HOW TO ORDER:**

**Color**

1	Gray	4	Green	7	Trans- parent
2	Blue	5	Orange	8	Yellow
3	Black	6	Red	9	White