

# Bluetooth USB Adapter, Parani™ SD1000U




## Features

- Bluetooth Specification v2.0 + EDR Class 1
- Working distance (In an open field): Normally 300 meters, up to 600m using 5 dipole antenna
- USB 2.0 interface
- Supports Windows, Linux, Mac OS and Windows CE.NET operating systems.
- No Bluetooth driver required.  
(No Toshiba or BlueSoleil driver required.)
- Provides transparent RS232 serial cable replacement for PC
- Supports Bluetooth Serial Port Profile (SPP)
- Supports up to 4 multiple simultaneous connections
- Interoperability with laptops, PDA terminals etc.
- Easy to use Windows configuration tool available.

**The Parani-SD1000U** is a class 1 type Bluetooth USB adapter for Serial Port Replacement that supports 300 meters of wireless transmission distance by default. The working distance can be further extended up to 600 meters using 5 dipole antenna can be replaceable.

It is suitable for industrial and special applications because it can cover longer communication distance (1000m) over other regular Bluetooth USB adapter accessories.

## Exterior

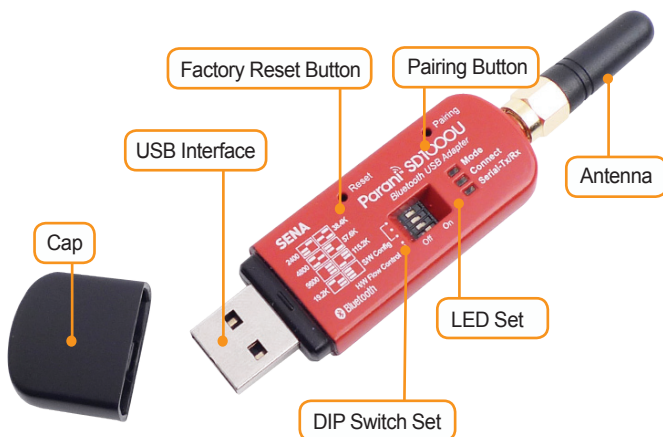

## Specifications

### **Standards**

- Bluetooth 2.0+EDR Class 1
- USB 2.0

### **Max Transfer Rate**

- 3 Mbps (EDR)

### **Frequency Range**

- 2.402 ~ 2.480GHz

### **Transmit Output Power**

- +18dBm

### **Receive Sensitivity**

- Basic 1Mbps: -90dBm
- EDR 2Mbps: -88dBm
- EDR 3Mbps: -87dBm

### **Diagnostic LED**

- Mode
- Connect
- Serial-Rx/Tx

### **Antenna Connector**

- RP-SMA

### **Antenna Gain**

- Default Stub Antenna: 1 dBi
- Optional Dipole Antennas: 3 dBi & 5 dBi

### **Working Distance (In Open Field)**

Stub Antenna	- Stub Antenna	300 meters
Dipole Antenna (3 dBi)	- Dipole Antenna (3 dBi)	400 meters
Dipole Antenna (5 dBi)	- Dipole Antenna (5 dBi)	600 meters

### **Driver Software**

- FTDI(FT232R) USB-Serial driver in public domain (<http://www.ftdichip.com/Drivers/VCP.htm>)
- No Toshiba or BlueSoleil driver required.

### **Supported Bluetooth Profiles**

- Serial Port Profile (SPP)

### **Computer OS Support**

- Windows 8.1
- Windows 8.1 x64
- Windows 8
- Windows 8 x64
- Windows Server2012
- Windows Server 2008 R2
- Windows 7
- Windows 7 x64
- Windows Server 2008
- Windows Server 2008 x64
- Windows Vista
- Windows Vista x64
- Windows Server 2003
- Windows Server 2003 x64
- Windows XP
- Windows XP x64
- Windows ME
- Windows 98
- Linux
- Mac OS X
- Mac OS 9
- Mac OS 8
- Windows CE.NET (Version 4.2 and greater)
- Android
- Windows RT

### **Environmental**

- Operating Temperature: -20°C ~ +70°C
- Storage Temperature: -40°C ~ +85°C
- Humidity: 95% Non-condensing

### **Physical properties**

- Dimension (L x W x H)
  - 68 mm x 22 mm x 11.5mm (2.6 in x 0.8 in x 0.4 in) without cap
  - 71 mm x 22 mm x 11.5mm (2.7 in x 0.8 in x 0.4 in) with cap
  - 97 mm x 22 mm x 11.5mm (3.8 in x 0.8 in x 0.4 in) with cap&1dBi stub
- Weight: 56 g

### **Regulatory Approvals**

- FCC, CE, TELEC, KCC, IC, Bluetooth SIG

### **Warranty**

- 1 year limited warranty

## Ordering Information

### **SD1000U-G01 Includes**

- Parani-SD1000U
- Stub antenna
- Quick Start Guide
- CD-ROM including Driver, User guide and Data sheet

### **Optional Accessories**

- SAT-G01R: 1 dBi Stub Antenna - RP-SMA Plug Right-hand Thread
- DAT-G01R: 3 dBi Dipole Antenna - RP-SMA Plug Right-hand Thread
- DAT5-G01R: 5 dBi Dipole Antenna - RP-SMA Plug Right-hand Thread
- SEC-G01R: 15cm Extension Cable (For SAT-G01R / DAT-G01R / DAT5-G01R)

### **U.S. / Canada / South America**

Tel: 408-448-1997 Fax: 408-907-3738  
 Sales and Support Toll Free (US/Canada): 8669-US-SENA (866-987-7362)  
 General Information Toll Free (US/Canada): 8668-US-SENA (866-887-7362)

### **EU / Africa**

Tel: +33 (0)1 53 53 16 29 Fax: +33 (0)1 70 24 70 90

### **Asia / Pacific**

Tel: +82-2-576-7362 Fax: +82-2-573-7710

### **Contact us via E-mail**

General Information: [info@senaindustrial.com](mailto:info@senaindustrial.com)  
 Sales & Distribution: [sales@senaindustrial.com](mailto:sales@senaindustrial.com)  
 Technical Support: [support@senaindustrial.com](mailto:support@senaindustrial.com)

**For more information,  
 please visit us at <http://www.senaindustrial.com>**