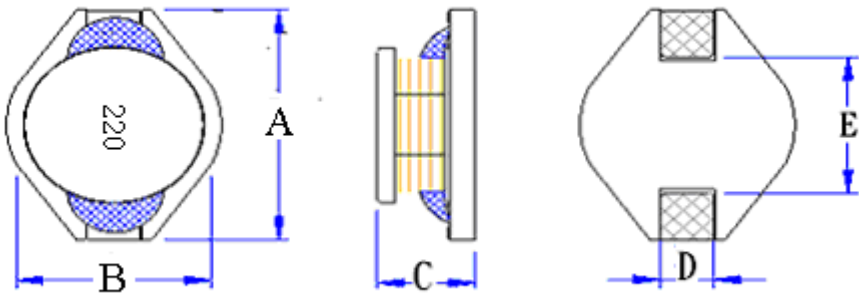
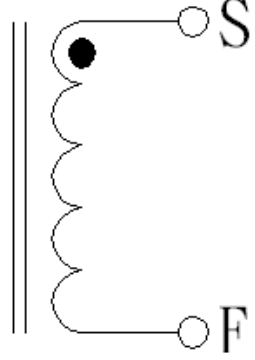


SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:	
PART NO: DS5022-220M		DWG.NO: MY2131713	
CUSTOMER PART NO:		CUST.DWG.NO:	
DIMENSION(UNIT: mm) 		A	18.80 (MAX) m/m
		B	15.50 (MAX) m/m
		C	7.60 (MAX) m/m
		D	2.54 (REF) m/m
		E	13.50 (REF) m/m
		F	m/m
		G	m/m
		H	m/m
		I	m/m
		J	m/m
		(2)ELECTRICAL REQUIREMENTS	
L (uH)	22 ± 20%		
RDC (Ω)	0.047 (MAX)		
IDC (A)	7 (MAX)		
TEST CONDITION	100KHZ / 0.1V		
(4)REMARK CORE:NP1 DR12.7×6(3.4-6.3)-C WIRE:2UEWΦ0.55mm*1P*18.5TS(REF) BASE:BASE-C-SS0600-A		APPROVED BY	
		CHECKED BY	
		DRAWN BY	

TEST DATA

CUSTOMER:				DATE:			
PART NO: DS5022-220M				DWG.NO: MY2131713			
CUSTOMER PART NO :				CUST.DWG.NO :			
TEST CONDITION: 100KHZ / 0.1V				DIMENSION (UNIT : mm)			
ITEM	L (uH)	RDC (Ω)	IDC (A)	A	B	C	
SPEC	22 ± 20%	0.047 (MAX)	7 (MAX)	18.80 (MAX)	15.50 (MAX)	7.60 (MAX)	
1	22.30	0.043	OK	18.17	15.13	6.88	
2	21.90	0.042	OK	18.18	15.13	6.98	
3	22.30	0.042	OK	18.30	15.11	6.91	
4	20.00	0.042	OK	18.20	15.10	6.90	
5	22.10	0.043	OK	18.17	15.13	6.88	
6	22.00	0.042	OK	18.32	15.08	6.93	
7	22.40	0.042	OK	18.31	15.09	6.92	
8	22.20	0.420	OK	18.29	15.10	6.94	
9	22.30	0.042	OK	18.17	15.13	6.90	
10	21.80	0.042	OK	18.25	15.10	6.95	
\bar{X}	21.93	0.08		18.236	15.11	6.919	
R	2.4	0.378		0.15	0.05	0.1	
TEST INSTRUMENTS HIOKI3532-50 LCR METER VR-131 RDC METER CH-301A BA/S CURRENT				APPROVED BY			
				CHECKED BY			
				DRAWN BY			