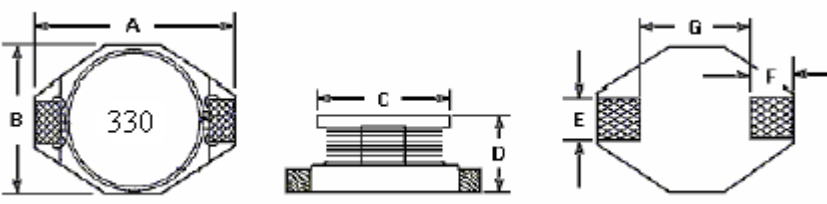
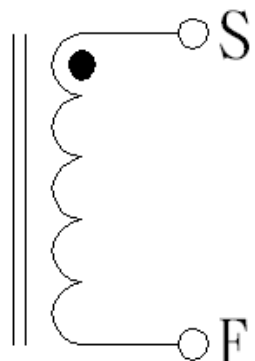


SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:			
PART NO: DS5022-330M		DWG.NO: MY2131715			
CUSTOMER PART NO:		CUST.DWG.NO:			
DIMENSION(UNIT: mm) 		A	18.54 (MAX)	m/m	
		B	15.24 (MAX)	m/m	
		C	12.70 (MAX)	m/m	
		D	7.11 (MAX)	m/m	
		E	2.54 (REF)	m/m	
		F	2.54 (REF)	m/m	
		G	12.70 (REF)	m/m	
		H		m/m	
		I		m/m	
		J		m/m	
		(2)ELECTRICAL REQUIREMENTS		(3)SCHEMATIC	
		L (uH)	33 ± 20%		
RDC (Ω)	0.066 (MAX)				
IDC (A)	5.5 (MAX)				
TEST CONDITION	100KHZ / 0.1V				
		APPROVED BY			
		CHECKED BY			
		DRAWN BY			

TEST DATA

CUSTOMER:				DATE:			
PART NO: DS5022-330M				DWG.NO: MY2131715			
CUSTOMER PART NO :				CUST.DWG.NO :			
TEST CONDITION: 100KHZ / 0.1V				DIMENSION (UNIT : mm)			
ITEM	L (uH)	RDC (Ω)	IDC (A)	A	B		
SPEC	33 ± 20%	0.066 (MAX)	5.5 (MAX)	18.54 (MAX)	15.24 (MAX)		
1	31.9	0.064	OK	18.40	13.90		
2	31.2	0.063	OK	18.50	13.97		
3	31.8	0.064	OK	18.47	13.94		
4	31.7	0.064	OK	18.67	14.05		
5	31.3	0.063	OK	18.50	13.96		
6	31.1	0.063	OK	18.64	14.10		
7	31.6	0.063	OK	18.60	14.08		
8	31.8	0.064	OK	18.62	14.05		
9	31.1	0.063	OK	18.33	14.04		
10	31.9	0.064	OK	18.24	13.99		
\bar{X}	31.54	0.063		18.497	14.008		
R	0.8	0.001		0.43	0.2		
TEST INSTRUMENTS DV-6021 LCR METER VR-131 RDC METER CH-301A BA/S CURRENT				APPROVED BY			
				CHECKED BY			
				DRAWN BY			