
CJ04 Series Board Mount Telephone Jacks

- Available in 4 and 6 ways
- Insulator: Gray, Glass Filled Polyester
- Flammability Rating: UL 94V-0
- Cavity confirms to FCC rules and regulations PART 68, SUBPART F
- Lead Free soldering process available

ROHS Compliant






409 10.4

.100


6 Position





14.4

3.2



CJ044**1900

CJ046**1900

Recommended P.C. Board Layout



P/N

3.45±0.05 1.02±0.05 .040±.002 φ0.8±0.05 .031±.002 TYP. φ2.3±0.1 .091±.004 TYP.2 \oplus 2.54±0.05 .100±.002 4.84±0.05 12.0±0.1 .472±.004

Recommended P.C. Board Layout


CJ07 Series Board Mount Telephone Jacks

6.0

14.2 .559 12.2

- Available in 4,6 and 8 ways
- Insulator: Black, Glass Filled Polyester
- Cavity confirms to FCC rules and regulations PART 68, SUBPART F
- Lead Free soldering process available

RoHS Compliant




1.02 TYP.

4 Position

Comet Electronics P/N: TS4P4C-PCB-S


P/N CJ074**1100




P/N

CJ076**1100

Recommended P.C. Board Layout

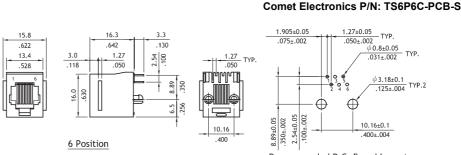



Recommended P.C. Board Layout