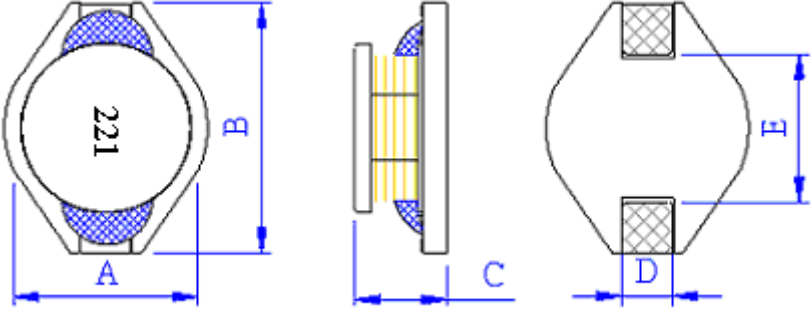


SPECIFICATION

CUSTOMER:		DATE:													
PART NO: DS3316-221M		DWG.NO:													
CUSTOMER PART NO:		CUST.DWG.NO:													
<p>(1) DIMENSION(UNIT: mm)</p> 		A	9.50 (MAX)	m/m											
		B	13.50 (MAX)	m/m											
		C	5.50 (MAX)	m/m											
		D	2.54 (REF)	m/m											
		E	8.00 (REF)	m/m											
		F		m/m											
		G		m/m											
		H		m/m											
		I		m/m											
		J		m/m											
		<p>(2)ELECTRICAL REQUIREMENTS</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 25%;">L (uH)</td> <td style="text-align: center;">220 ± 20%</td> </tr> <tr> <td>RDC (Ω)</td> <td style="text-align: center;">0.61 (MAX)</td> </tr> <tr> <td>IDC (A)</td> <td style="text-align: center;">1 (MAX)</td> </tr> <tr> <td>TEST CONDITION</td> <td style="text-align: center;">100KHZ / 0.1V</td> </tr> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> </table>		L (uH)	220 ± 20%	RDC (Ω)	0.61 (MAX)	IDC (A)	1 (MAX)	TEST CONDITION	100KHZ / 0.1V				
L (uH)	220 ± 20%														
RDC (Ω)	0.61 (MAX)														
IDC (A)	1 (MAX)														
TEST CONDITION	100KHZ / 0.1V														
		APPROVED BY													
		CHECKED BY													
		DRAWN BY													

TEST DATA

CUSTOMER:				DATE:			
PART NO: DS3316-221M				DWG.NO:			
CUSTOMER PART NO :				CUST.DWG.NO :			
TEST CONDITION: 100KHZ / 0.1V				DIMENSION (UNIT : mm)			
ITEM	L (uH)	RDC (Ω)	IDC (A)	A	B	C	
SPEC	220 ± 20%	0.61 (MAX)	1 (MAX)	9.50 (MAX)	13.50 (MAX)	5.50 (MAX)	
1	196.20	0.58	OK	9.26	13.12	4.98	
2	189.00	0.57	OK	9.27	12.96	4.99	
3	199.60	0.56	OK	9.27	12.84	5.01	
4	194.40	0.57	OK	9.27	13.09	5.04	
5	194.00	0.56	OK	9.25	12.96	4.93	
6	192.00	0.58	OK	9.27	13.01	5.02	
7	196.70	0.57	OK	9.26	12.95	5.01	
8	195.80	0.56	OK	9.25	13.16	4.99	
9	212.30	0.57	OK	9.28	12.98	5.04	
10	207.70	0.56	OK	9.26	12.95	5.02	
\bar{X}	197.77	0.568		9.264	13.002	5.003	
R	23.3	0.02		0.03	0.32	0.11	
TEST INSTRUMENTS HIOKI3532-50 LCR METER VR-131 RDC METER CH-301A BA/S CURRENT				APPROVED BY			
				CHECKED BY			
				DRAWN BY			