

60V PNP SMALL SIGNAL TRANSISTOR IN SOT23

Features

- Epitaxial Planar Die Construction
- Ideal for Low Power Amplification and Switching
- Complementary NPN Type: MMBT2222A
- Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)
- Qualified to AEC-Q101 Standards for High Reliability
- PPAP Capable (Note 4)


Mechanical Data

- Case: SOT23
- Case Material: Molded Plastic, "Green" Compound;
 UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 (3)
- Weight: 0.008 grams (Approximate)






Top View



Device Symbol



Top View Pin-Out

Ordering Information (Notes 4 & 5)


Product	Status	Compliance	Marking	Reel Size (inches)	Tape Width (mm)	Quantity Per Reel
MMBT2907A-7-F	Active	AEC-Q101	K2F	7	8	3,000
MMBT2907A-13-F	Active	AEC-Q101	K2F	13	8	10,000
MMBT2907AQ-7-F	Active	Automotive	K2F	7	8	3,000

Notes:

- 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS) & 2011/65/EU (RoHS 2) compliant.
- 2. See http://www.diodes.com/quality/lead_free.html for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
- 3. Halogen and Antimony free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
- 4. Automotive products are AEC-Q101 qualified and are PPAP capable. Automotive, AEC-Q101 and standard products are electrically and thermally the same, except where specified. For more information, please refer to http://www.diodes.com/product_compliance_definitions.html.
- 5. For packaging details, go to our website at http://www.diodes.com/products/packages.html.

Marking Information

SOT23



$$\begin{split} & \text{K2F} = \text{Product Type Marking Code} \\ & \text{YM} = \text{Date Code Marking} \\ & \text{Y or } \overline{\text{Y}} = \text{Year (ex: D} = 2016) \\ & \text{M or } \overline{\text{M}} = \text{Month (ex: 9} = \text{September)} \end{split}$$

Date Code Key

Year	2013		2014	2015		2016	2017		2018	2019		2020
Code	Α		В	С		D	E		F	G		Н
Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	0	Ν	D



Absolute Maximum Ratings (@T_A = +25°C, unless otherwise specified.)

Characteristic	Symbol	Value	Unit
Collector-Base Voltage	V _{CBO}	-60	V
Collector-Emitter Voltage	V _{CEO}	-60	V
Emitter-Base Voltage	V _{EBO}	-6.0	V
Collector Current	Ic	-600	mA
Peak Collector Current	I _{CM}	-800	mA
Peak Base Current	I _{BM}	-200	mA

Thermal Characteristics

Characteristic		Symbol	Value	Unit	
Collector Power Dissipation	(Note 6)	D	310	mW	
Collector Fower Dissipation	(Note 7)	P_D	350	IIIVV	
Thermal Desistance Junction to Ambient	(Note 6)	D.	403	°C/W	
Thermal Resistance, Junction to Ambient	(Note 7)	$R_{\theta JA}$	357		
Thermal Resistance, Junction to Leads (Note 8)		$R_{\theta JL}$	350	°C/W	
Operating and Storage Temperature Range	$T_{J_i}T_{STG}$	-55 to +150	°C		

ESD Ratings (Note 9)


Characteristic	Symbol	Value	Unit	JEDEC Class
Electrostatic Discharge - Human Body Model	ESD HBM	4,000	V	3A
Electrostatic Discharge - Machine Model	ESD MM	400	V	С


Notes:

- 6. For a device mounted on minimum recommended pad layout 1oz copper that is on a single-sided FR-4 PCB; device is measured under still air conditions whilst operating in a steady-state.
- 7. Same as Note 6, except the device is mounted on 15 mm x 15mm 1oz copper.
- 8. Thermal resistance from junction to solder-point (at the end of the leads).
- 9. Refer to JEDEC specification JESD22-A114 and JESD22-A115.




Thermal Characteristics and Derating Information





Derating Curve

Transient Thermal Impedance



Pulse Power Dissipation

April 2016



Electrical Characteristics (@T_A = +25°C, unless otherwise specified.)

Characteristic	Symbol	Min	Max	Unit	Test Condition
OFF CHARACTERISTICS					
Collector-Base Breakdown Voltage	BV _{CBO}	-60	_	V	$I_C = -100\mu A, I_E = 0$
Collector-Emitter Breakdown Voltage (Note 10)	BV_{CEO}	-60	_	V	$I_C = -10 \text{mA}, I_B = 0$
Emitter-Base Breakdown Voltage	BV_{EBO}	-6.0	_	V	$I_E = -100 \mu A, I_C = 0$
Collector Cut-Off Current	I _{CBO}	_	-10	nA	$V_{CB} = -50V, I_{E} = 0$
	ICBO			μA	$V_{CB} = -50V, I_E = 0, T_A = +125^{\circ}C$
Collector Cut-Off Current	I _{CEX}	_	-50	nA	$V_{CE} = -30V, V_{EB(OFF)} = -0.5V$
Base Cut-Off Current	I _{BL}	_	-50	nA	$V_{CE} = -30V, V_{EB(OFF)} = -0.5V$
Emitter Cut-Off Current	I _{EBO}	_	-50	nA	$V_{EB} = -6.0V$
ON CHARACTERISTICS (Note 10)					
		75	_		$I_C = -100\mu A$, $V_{CE} = -10V$
		100	_		$I_C = -1.0 \text{mA}, V_{CE} = -10 \text{V}$
DC Current Gain	h _{FE}	100	_	_	$I_C = -10mA, V_{CE} = -10V$
Do Guitoni Guiti		100 50	300		$I_C = -150 \text{mA}, V_{CE} = -10 \text{V}$
			_		$I_C = -500 \text{mA}, V_{CE} = -10 \text{V}$
Collector-Emitter Saturation Voltage	V _{CE(SAT)}	_	-0.4 -1.6	V	$I_C = -150 \text{mA}, I_B = -15 \text{mA}$
Consolid Emilior Salaration Voltage				•	$I_C = -500 \text{mA}, I_B = -50 \text{mA}$
Base-Emitter Saturation Voltage	V _{BE(SAT)}		-1.3 -2.6	V	$I_C = -150 \text{mA}, I_B = -15 \text{mA}$
				<u> </u>	$I_C = -500 \text{mA}, I_B = -50 \text{mA}$
SMALL SIGNAL CHARACTERISTICS					
Output Capacitance	C_{obo}		8.0	pF	$V_{CB} = -10V, f = 1.0MHz, I_E = 0$
Input Capacitance	C_{ibo}	_	30	pF	$V_{EB} = -2.0V$, $f = 1.0MHz$, $I_{C} = 0$
Current Gain-Bandwidth Product	f_{T}	200	_	MHz	$V_{CE} = -20V, I_{C} = -50mA,$ f = 100MHz
SWITCHING CHARACTERISTICS					
Turn-On Time	ton	_	45	ns	V 20V I 450m A
Delay Time	t _D	_	10	ns	$V_{CC} = -30V, I_{C} = -150mA,$
Rise Time	t _R	_	40	ns	I _{B1} = -15mA
Turn-Off Time	t _{OFF}	_	100	ns	V 0.0V 1 450 A
Storage Time	ts	_	80	ns	V _{CC} = -6.0V, I _C = -150mA,
Fall Time	t _F		30	ns	$I_{B1} = I_{B2} = -15\text{mA}$

Note: 10. Measured under pulsed conditions. Pulse width \leq 300 μ s. Duty cycle \leq 2%.






Fig. 1 Typical DC Current Gain vs. Collector Current




Fig. 3 Typical Collector-Emitter Saturation Voltage vs. Collector Current




Fig. 5 Typical Collector Saturation Region




Fig. 2 Typical Base-Emitter Saturation Voltage vs. Collector Current




Fig. 4 Typical Gain-Bandwidth Product vs. Collector Current





Fig. 6 Typical Capacitance Characteristics



Package Outline Dimensions

Please see http://www.diodes.com/package-outlines.html for the latest version.

SOT23

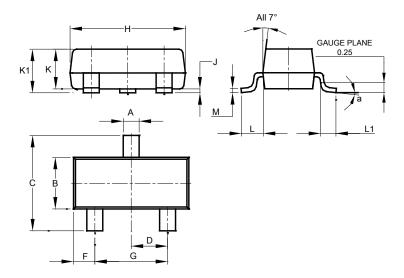


SOT23						
Dim	Min	Max	Тур			
Α	0.37	0.51	0.40			
В	1.20	1.40	1.30			
С	2.30	2.50	2.40			
D	0.89	1.03	0.915			
F	0.45	0.60	0.535			
G	1.78	2.05	1.83			
I	2.80	3.00	2.90			
J	0.013	0.10	0.05			
K	0.890	1.00	0.975			
K1	0.903	1.10	1.025			
L	0.45	0.61	0.55			
L1	0.25	0.55	0.40			
М	0.085	0.150	0.110			
а	0°	8°				
All	All Dimensions in mm					

Suggested Pad Layout

Please see http://www.diodes.com/package-outlines.html for the latest version.

SOT23



Dimensions	Value (in mm)
С	2.0
Х	0.8
X1	1.35
Y	0.9
V1	2.0



IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
 - 1. are intended to implant into the body, or
 - 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2016, Diodes Incorporated

www.diodes.com