Robust momentary pushbutton switches • metal plunger



DISTINCTIVE FEATURES

Butt action contacts

Double break

UL and CSA approved



ELECTRICAL SPECIFICATIONS

- Max. current/voltage rating with resistive load :
- silver contacts (A): 4 A 250 VAC 8 A 125 VAC 4 A 24 VDC 8 A 12 VDC
- silver plated copper contacts (C):
- 2 A 250 VAC 3 A 125 VAC 2 A 24 VDC 3 A 12 VDC
- Initial contact resistance : 10 m Ω max.
- Insulation resistance : 1,000 M Ω min. at 500 VDC
- Dielectric strength:
 - 2,000 Vrms 50 Hz min. between terminals
 - 3,000 Vrms 50 Hz min. between terminals and frame
- Electrical life: 10,000 cycles at full load



GENERAL SPECIFICATIONS

- Torque : 1.50 Nm (1.10 Ft.lb) max. applied to nut
- Panel thickness: 4.5 mm (.177) max.
- Total travel:

NO : 4.5 mm (.177) \pm 0.3 (.011) NC : 3.5 mm (.137) \pm 0.3 (.011)

• Operating temperature : -20 °C to +55 °C (-4 °F to +131 °F)



MATERIALS

- Case: polyamide
- Plunger: top chrome plated brass on polyamide base
- Bushing : brass, nickel plated
- Contacts :
- A: silver
- C: copper, silver plated
- Cap nut : brass, chrome plated

APEM products may be recycled at end-of-life for the re-claiming of valuable metal components.

The company reserves the right to change specifications without notice.





Robust momentary pushbutton switches • metal plunger



MOUNTING

• Panel cut-out : Ø 12.2 (.480)

AGENCY APPROVALS






4 A 250 VAC - 8 A 125 VAC


Availability: approved models are 1213A and 1203A (M or MR) (model 1223A is only UL approved). Marking: to order switches marked UL or CSA, complete appropriate box of ordering format.




TERMINALS



Solderlug / quick-connect.






Screw + clamp



ELECTRICAL FUNCTIONS







Robust momentary pushbutton switches • metal plunger



BUILD YOUR PART NUMBER

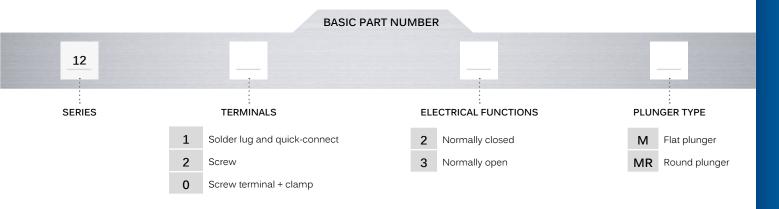

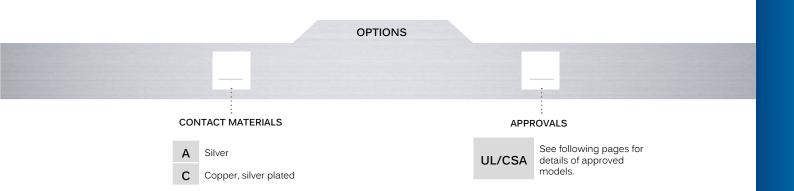



ABOUT THIS SERIES

On the following pages, you will find successively basic part numbers of switches and options in the same order as in above chart.


- (1) Notice: please note that not all combinations of above numbers are available. Refer to following pages for further information.
- Mounting accessories: standard hardware supplied with all models: 1 hex nut U166 and 1 conic cap nut U1866-6. Special cap nut U1874 is presented on the following pages.

Robust momentary pushbutton switches • metal plunger


SOLDER LUG/QUICK-CONNECT TERMINALS 6.35 X 0.8 (.250 X .031)





SCREW TERMINALS

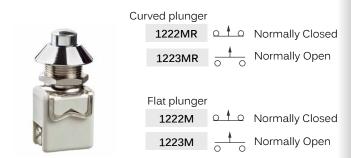


SCREW TERMINALS + CLAMP

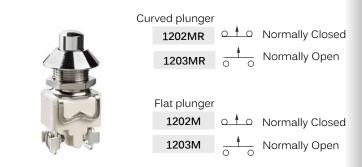

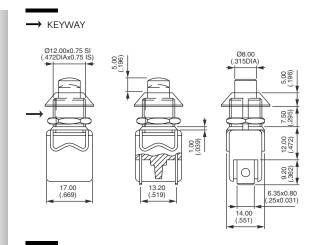

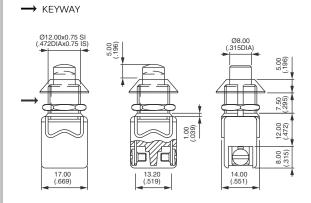

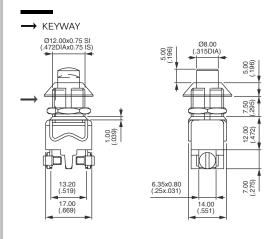

Robust momentary pushbutton switches • metal plunger

CONTACT MATERIALS BASIC P/N
A Silver C Copper, silver plated
AGENCY APPROVAL
BASIC P/N
UL - CSA Availability: approved models are 1213A and 1203A (M or MR) - model 1223A is only UL approved. Marking: to order switches marked UL or CSA, complete above box with desired approvals.

SPECIAL CAP NUT

Order separately.

Chrome plated cap nut \varnothing 16 (.629), flat and plain. Can be supplied instead of standard cap nut U1866-6.

