


Material:
* Insulation: PBT, Glass reinforced, UL 94V-0
* Contact: Phosphor Bronze

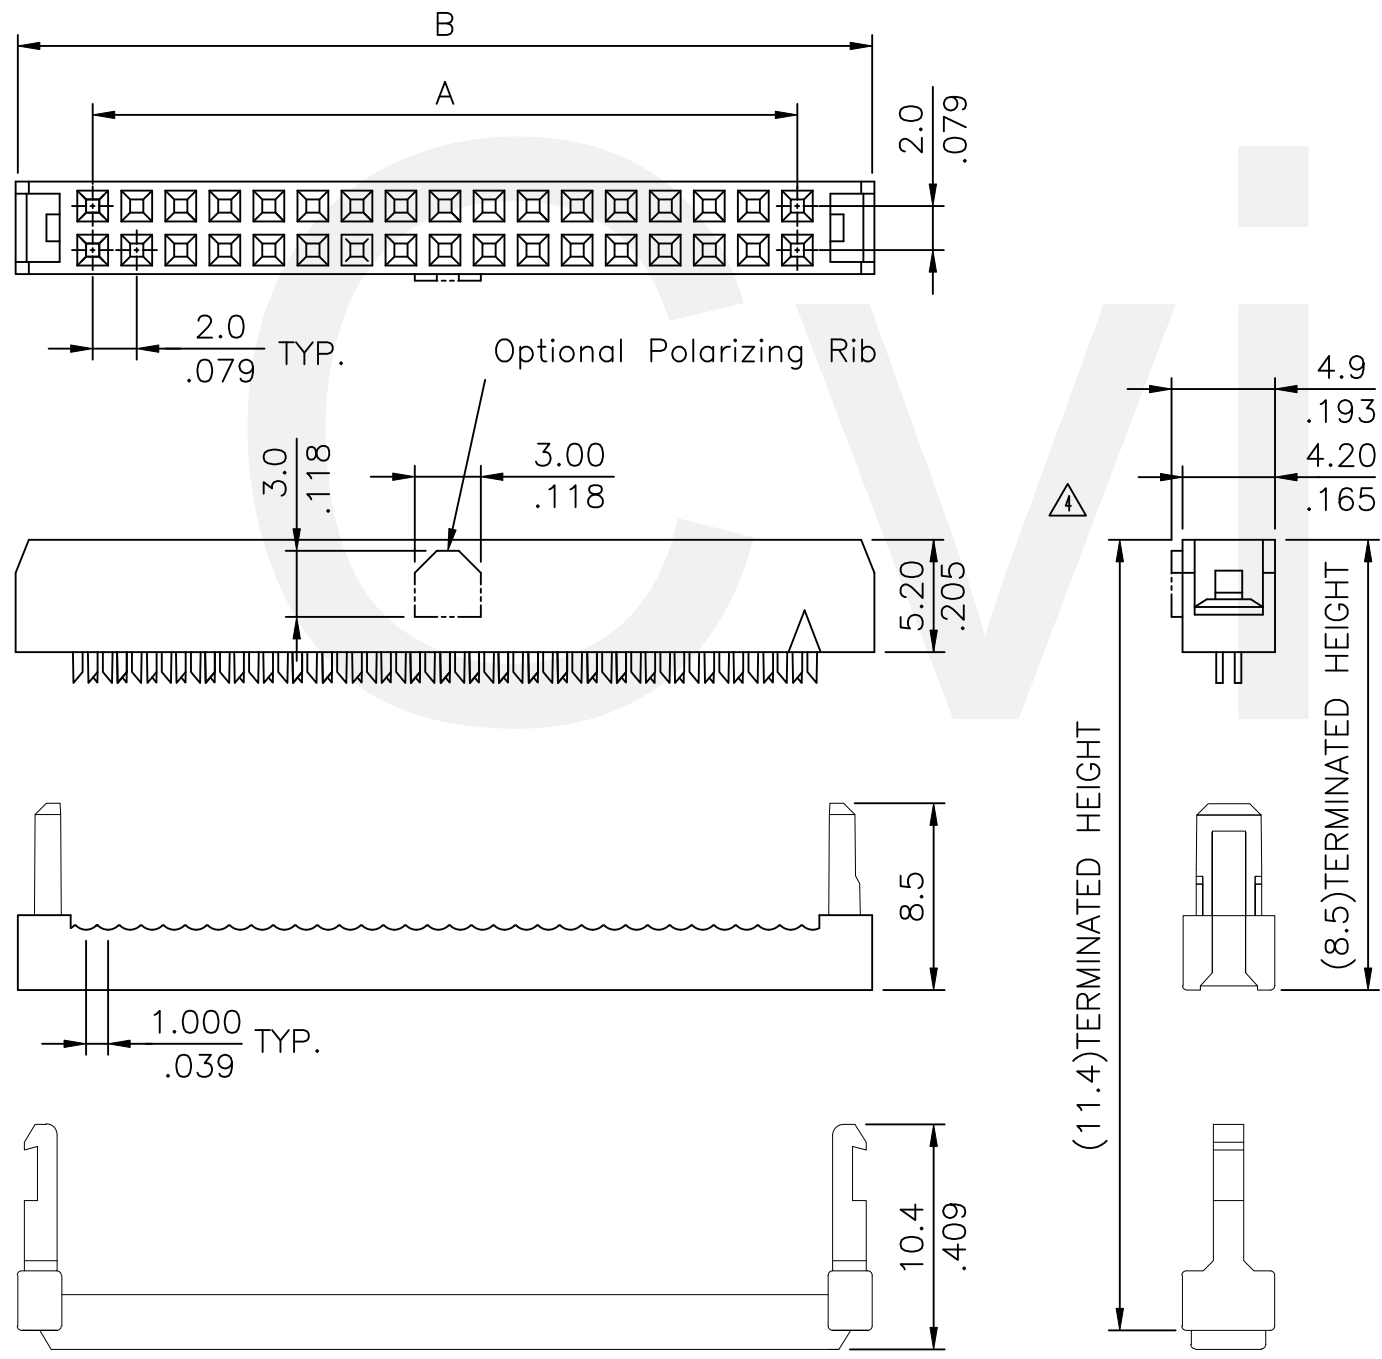

Circuits	Dimension		Circuits	Dimension	
	A	B		A	B
6	4.0(.157)	11.3(.441)	30	28.0(1.102)	35.3(1.390)
8	6.0(.236)	13.3(.524)	32	30.0(1.181)	37.3(1.469)
10	8.0(.315)	15.3(.502)	34	32.0(1.260)	39.3(1.547)
12	10.0(.394)	17.3(.681)	36	34.0(1.339)	41.3(1.626)
14	12.0(.472)	19.3(.760)	40	38.0(1.496)	45.3(1.783)
16	14.0(.551)	21.3(.839)	44	42.0(1.654)	49.3(1.941)
20	18.0(.709)	25.3(.996)	50	48.0(1.890)	55.3(2.177)
22	20.0(.787)	27.3(1.071)	56	54.0(2.026)	61.3(2.413)
24	22.0(.866)	29.2(1.175)	60	58.0(2.283)	65.3(2.571)
26	24.0(.945)	31.2(1.232)	64	62.0(2.441)	69.3(2.727)

Ordering Code:

CA11 ** S A 1 00
① ② ③ ④ ⑤ ⑥

- ① Series No.
② No. of Circuits :
③ S= Receptacle
④ Plating option :
A= Selective Gold flash plated over 1.27 μ m(50 μ ") Nickel
B= Selective 0.38 μ m(15 μ ") Gold Plated over 1.27 μ m(50 μ ") Nickel
C= Selective 0.76 μ m(30 μ ") Gold plated over 1.27 μ m(50 μ ") Nickel
⑤ Color : 1= Black
⑥ Option : 00= With Polarizing Rib(Standard)
A0= Without Polarizing Rib

RoHS Compliant

④	Eric H	6/17-25'	ECNT125099 / ECR1T125018		DATE	UNIT: mm / inch	TITLE:	 瀚荃股份有限公司 CviLux Corporation			
③	Enya	9/4-12'	ECN12218-0 / ECR12063-0	DRAWN BY:	Eric H	6/17-25'	2.00MM(.079") IDC SOCKET				
②	Enya	8/8-12'	ECN12187-0 / ECR12053-0	ENGINEER:	Sun	6/17-25'	MATERIAL:	DRAWING NO.	CA1101SI	PART NO.	CA11**SA100
①	JIM	9/19 06'	ECN06328	CHECKED BY:	Eisley	6/17-25'	FINISH:	SCALE	2 / 1	SHEET	1 OF 1
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	6/17-25'					