

## SC Series

## CHIP TYPE, LOW LEAKAGE CURRENT

## 貼片式, 低漏電流品




- Low leakage current (0.5~3.3 $\mu$ A max.)  
低漏電流 (0.5~3.3 $\mu$ A 最大值)
- Low cost for replacement of some tantalum applications  
可替換價格較高的鉭電容器
- RoHS & REACH compliant, Halogen-free  
符合 RoHS 與 REACH, 無鹵

## □ SPECIFICATIONS 特性表

Items 項目	Characteristics 主要特性						
Operation Temperature Range 使用溫度範圍	-40 ~ +85°C						
Voltage Range 額定工作電壓範圍	6.3 ~ 50V						
Capacitance Range 靜電容量範圍	0.1 ~ 220 $\mu$ F						
Capacitance Tolerance 靜電容量允許偏差	$\pm$ 20% at 120Hz, 20°C						
Leakage Current 漏電流	Leakage current $\leq$ 0.002CV or 0.5 $\mu$ A, whichever is greater (after 2 minutes application of rated voltage at 20°C) 漏電流 $\leq$ 0.002CV 或 0.5 $\mu$ A, 取較大值 (在 20°C 環境中施加額定工作電壓 2 分鐘後) C: Nominal capacitance ( $\mu$ F) 標稱靜電容量, V: Rated voltage (V) 額定電壓						
Surge Voltage & Dissipation Factor (tan $\delta$ ) 浪湧電壓和損耗角正切	Measurement frequency 測試頻率: 120Hz, Temperature 溫度: 20°C						
	Rated Voltage (V) 額定工作電壓	6.3	10	16	25	35	50
	Surge voltage 浪湧電壓	8.0	13	20	32	44	63
	tan $\delta$ (max.) 最大損耗角正切	0.24	0.20	0.16	0.14	0.12	0.10
Stability at Low Temperature 低溫特性	Measurement frequency 測試頻率: 120Hz						
	Rated Voltage (V) 額定工作電壓	6.3	10	16, 25	35, 50		
	Impedance Ratio 阻抗比	Z(-25°C) / Z(20°C)	4	3	2	2	
	ZT/Z20 (max.)	Z(-40°C) / Z(20°C)	8	6	4	3	
Load Life 高溫負荷特性	After 2000 hours application of the rated voltage at 85°C, they meet the characteristics listed below. 在 85°C 環境中施加額定工作電壓 2000 小時後, 電容器的特性符合下表的要求。						
	Capacitance Change 靜電容量變化率	Within $\pm$ 25% of initial value 初始值的 $\pm$ 25%以內					
	Dissipation Factor 損耗角正切	200% or less of initial specified value 不大於規範值的 200%					
	Leakage Current 漏電流	initial specified value or less 不大於規範值					
Resistance to Soldering Heat 耐焊接熱特性 (Please refer page 23 for soldering conditions) (焊接條件請查閱第 23 頁)	After reflow soldering and restored at room temperature, they meet the characteristics listed below. 經過回流焊並冷卻至室溫後, 電容器的特性符合下表的要求。						
	Capacitance Change 靜電容量變化率	Within $\pm$ 10% of initial value 初始值的 $\pm$ 10%以內					
	Dissipation Factor 損耗角正切	initial specified value or less 不大於規範值					
	Leakage Current 漏電流	initial specified value or less 不大於規範值					
Marking 標識	Black print on the case top. 鋁殼頂部黑字印刷。						

## □ DRAWING 外形圖 (Unit: mm)

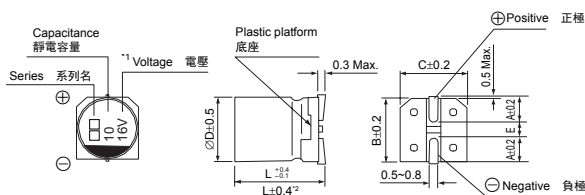

\*1. Voltage mark for 6.3V is [6V]  
\*2. Applicable to  $\varnothing$ 6.3x7.7

6.3V 的產品標識為 [6V]  
適用於 $\varnothing$ 6.3x7.7

## □ DIMENSIONS (Unit: mm) 尺寸表

$\varnothing$ D x L	4 x 5.4	5 x 5.4	6.3 x 5.4	6.3 x 7.7
A	2.0	2.2	2.6	2.6
B	4.3	5.3	6.6	6.6
C	4.3	5.3	6.6	6.6
E $\pm$ 0.2	1.0	1.4	1.9	1.9
L	5.4	5.4	5.4	7.7

**Note:** All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.

注: 以上所提供的設計及特性參數僅供參考, 任何修改不作預先通知。如果在使用上有疑問, 請在採購前與我們聯繫, 以便提供技術上的協助。

CAT.2019/V4

## SC Series

## □ DIMENSIONS &amp; MAXIMUM PERMISSIBLE RIPPLE CURRENT &amp; ESR 規格尺寸及最大允許紋波電流及 ESR 值

WV Parameter 參數 μF		6.3 (0J)			10 (1A)			16 (1C)		
		Case size ØD×L (mm) 尺寸	E.S.R. (Ω) 20°C, 120Hz E.S.R.值	Ripple current (mA rms) at 85°C, 120Hz 紋波電流	Case size ØD×L (mm) 尺寸	E.S.R. (Ω) 20°C, 120Hz E.S.R.值	Ripple current (mA rms) at 85°C, 120Hz 紋波電流	Case size ØD×L (mm) 尺寸	E.S.R. (Ω) 20°C, 120Hz E.S.R.值	Ripple current (mA rms) at 85°C, 120Hz 紋波電流
10	100						4 × 5.4	34.5	25	
22	220	4 × 5.4	23.5	31	5 × 5.4	19.6	35	5 × 5.4	39	
33	330	5 × 5.4	15.7	39	5 × 5.4	13.1	43	6.3 × 5.4	57	
47	470	5 × 5.4	11.0	47	6.3 × 5.4	9.2	59	6.3 × 5.4	68	
100	101	6.3 × 5.4	5.2	75	6.3 × 5.4	4.3	76	6.3 × 7.7	96	
220	221	6.3 × 7.7	2.4	85						

WV Parameter 參數 μF		25 (1E)			35 (1V)			50 (1H)		
		Case size ØD×L (mm) 尺寸	E.S.R. (Ω) 20°C, 120Hz E.S.R.值	Ripple current (mA rms) at 85°C, 120Hz 紋波電流	Case size ØD×L (mm) 尺寸	E.S.R. (Ω) 20°C, 120Hz E.S.R.值	Ripple current (mA rms) at 85°C, 120Hz 紋波電流	Case size ØD×L (mm) 尺寸	E.S.R. (Ω) 20°C, 120Hz E.S.R.值	Ripple current (mA rms) at 85°C, 120Hz 紋波電流
0.1	0R1						4 × 5.4	2156	1.0	
0.22	R22						4 × 5.4	980	2.3	
0.33	R33						4 × 5.4	653	3.5	
0.47	R47						4 × 5.4	459	5	
1	010						4 × 5.4	216	10	
2.2	2R2						4 × 5.4	98	15	
3.3	3R3						4 × 5.4	65	18	
4.7	4R7	4 × 5.4	64.2	19	4 × 5.4	55.1	20	5 × 5.4	23	
10	100	5 × 5.4	30.2	28	5 × 5.4	25.9	30	6.3 × 5.4	34	
22	220	6.3 × 5.4	13.7	52	6.3 × 5.4	11.8	54	6.3 × 7.7	85	
33	330	6.3 × 5.4	9.1	63	6.3 × 7.7	7.8	105			
47	470	6.3 × 7.7	6.4	100	6.3 × 7.7	5.5	110			

## □ FREQUENCY COEFFICIENT OF ALLOWABLE RIPPLE CURRENT 紋波電流頻率補償系數

Frequency 頻率	~50Hz	120Hz	300Hz	1KHz	10KHz~
Coefficient 系數	0.70	1.00	1.17	1.36	1.50

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5~10°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced. 鋁電解電容器在疊加紋波電流後會引起發熱，溫度每上升 5~10°C 壽命會減半。若要保持長壽命性能，請在使用過程中適當降低紋波電流。

- Taping specifications are given in page 17. 編帶標準請查閱第 17 頁。
- Soldering conditions and recommended land size are given in page 23. 焊接條件及推薦安裝尺寸請查閱第 23 頁。
- Please refer to page 18 for the minimum package quantity. 最小包裝數量請查閱第 18 頁。
- Please refer to page 15 for the Part Number System. 產品編碼規則請查閱第 15 頁。

**Note:** All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.

注：以上所提供的設計及特性參數僅供參考，任何修改不作預先通知。如果在使用上有疑問，請在採購前與我們聯繫，以便提供技術上的協助。

CAT.2019/V4