


Material:

- * Insulation: PBT Glass Fiber UL 94V-0
- * Contact: Brass

Ordering Code:

$\frac{CA23}{①}$
 $\frac{**}{②}$
 $\frac{P}{③}$
 $\frac{*}{④}$
 $\frac{1}{⑤}$
 $\frac{OZ}{⑥}$

- ① Series No.
- ② No. of Circuits:
- ③ Contact type: P= Plug
- ④ Plating option:
 A= Selective Gold flash plated over 0.76 μm(30 μ") Nickel
 B= Selective 0.38 μm(15 μ") Gold plated over 0.76 μm(30 μ") Nickel
 C= Selective 0.76 μm(30 μ") Gold plated over 0.76 μm(30 μ") Nickel
- ⑤ Color: 1= Black
- ⑥ Other Options:
 OZ= Standard

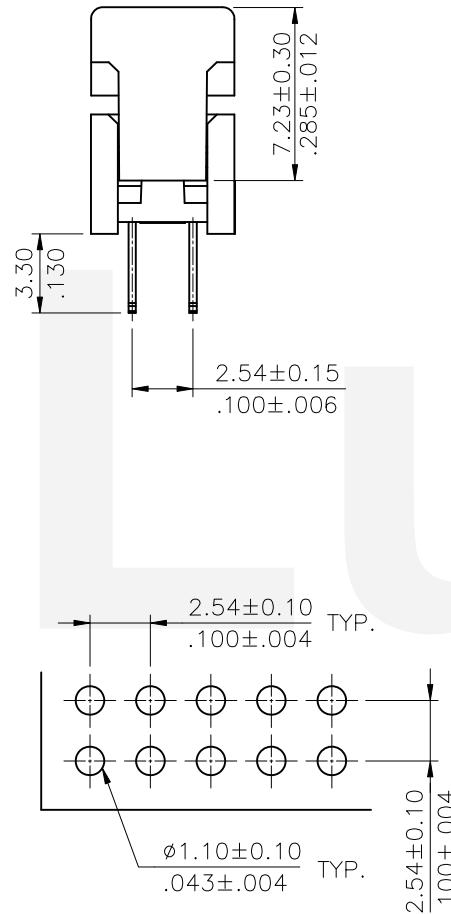

Recommended P.C. Board Layout

Circuits	Dimension		Circuits	Dimension	
	A	B		A	B
6	5.08(.200)	12.98(.511)	24	27.94(1.100)	35.84(1.411)
8	7.62(.300)	15.52(.611)	26	30.48(1.200)	38.38(1.511)
10	10.16(.400)	18.06(.711)	30	35.56(1.400)	43.46(1.711)
12	12.70(.500)	20.60(.811)	34	40.64(1.600)	48.54(1.911)
14	15.24(.600)	23.14(.911)	40	48.26(1.900)	56.16(2.211)
16	17.78(.700)	25.68(1.011)	44	53.34(2.100)	61.24(2.411)
18	20.32(.800)	28.22(1.111)	50	60.96(2.400)	68.86(2.711)
20	22.86(.900)	30.76(1.211)			

Tin-Lead Process

RoHS Compliant

SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	5/28-20'
④						
③						
②						
①						

CVILUX
 2020.06.04
ISSUED

UNIT:	mm / inch	TITLE:	2.54MM (.100") RIBBON CABLE IDC DIP PLUG
TOLERANCE UNLESS OTHERWISE SPECIFIED		MATERIAL:	
.X	± 0.30/.012	X'	± 3'
.XX	± 0.20/.008	X''	± 2'
.XXX	± 0.10/.004	.XX'	± 1'
FINISH:		DRAWING NO. CA2305SA PART NO. CA23**P*10Z	



瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CA2305SA	PART NO.	CA23**P*10Z
SCALE	3 / 1	SHEET	1 OF 1