

STRADA-2X2-CY

Beam for canopy lighting with batwing light distribution. Suitable for symmetrical tunnel lighting.

SPECIFICATION:

Dimensions	50.0 x 50.0
Height	6 mm
Fastening	screw
ROHS compliant	yes ⓘ




MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
STRADA-2X2-CY	Multi-lens	PMMA	clear		

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C13499_STRADA-2X2-CY » Box size: 480 x 280 x 300 mm	800	160	160	6.2

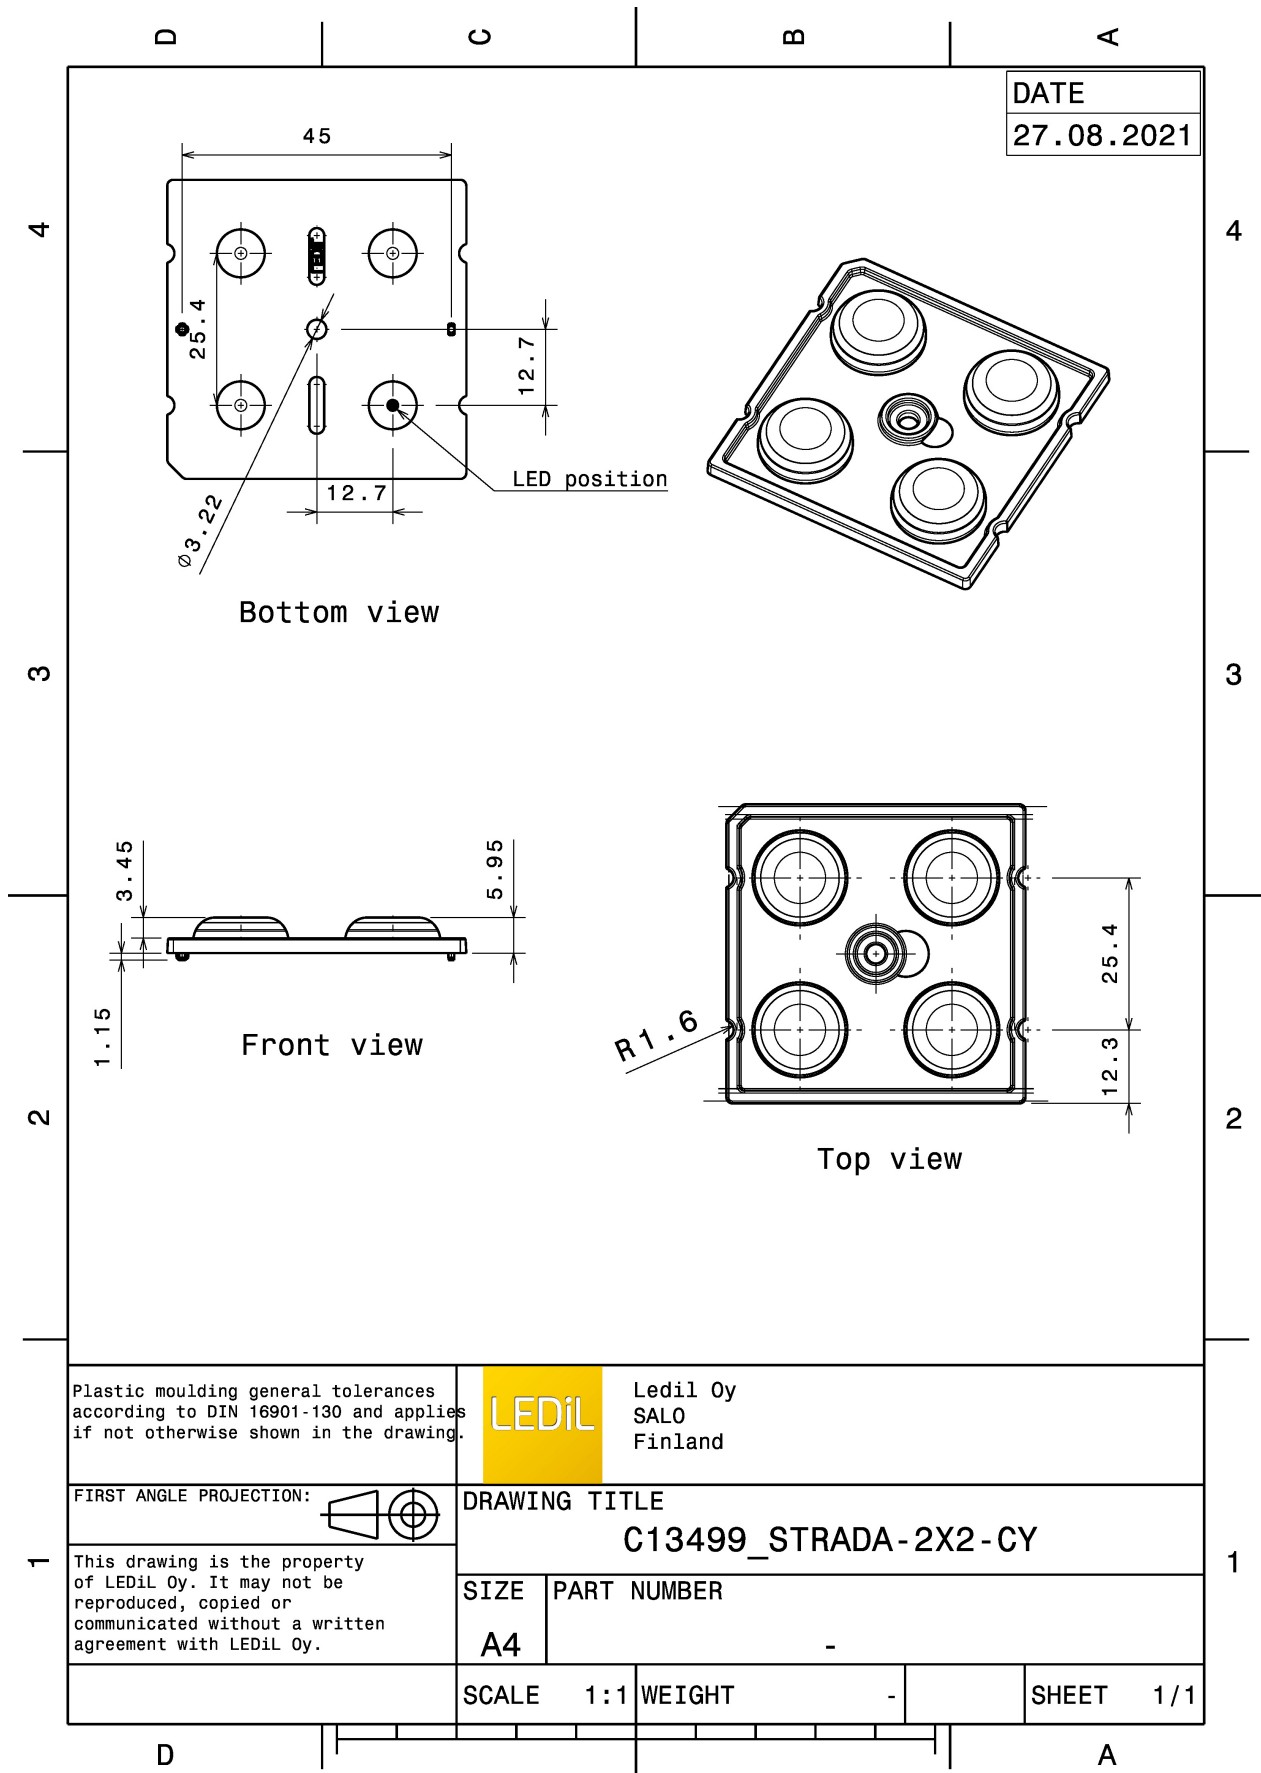


See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):




LED Bridgelux SMD 5050
 FWHM / FWTM 120.0 + 119.0° / 143.0 + 139.0°
 Efficiency 94 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

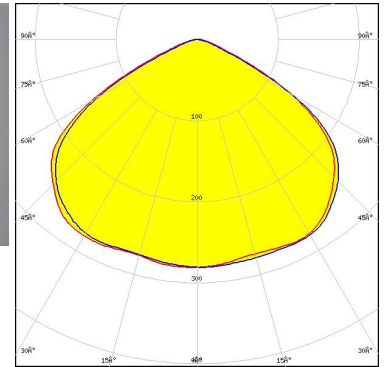

Light distribution files




LED J Series 5050C 6V E Class
 FWHM / FWTM 122.0° / 140.0°
 Efficiency 98 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

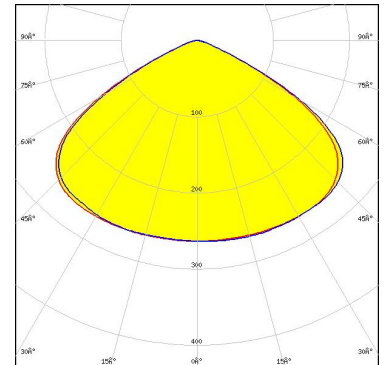

Light distribution files



LED XD16
 FWHM / FWTM 132.0 + 130.0° / 152.0 + 148.0°
 Efficiency 94 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

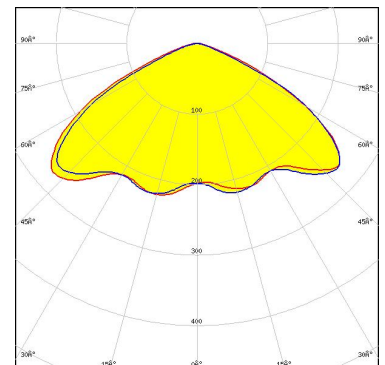


Light distribution files

OPTICAL RESULTS (MEASURED):





LED XD16
 FWHM / FWTM 125.0 + 124.0° / 149.0 + 145.0°
 Efficiency 94 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 4
 Light colour/type White
 Required components:

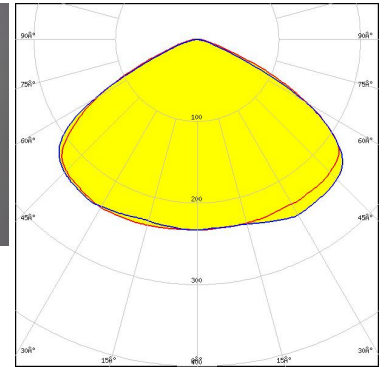

Light distribution files




LED XM-L
 FWHM / FWTM 126.0° / 149.0°
 Efficiency 94 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

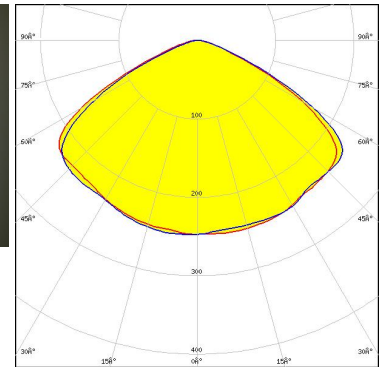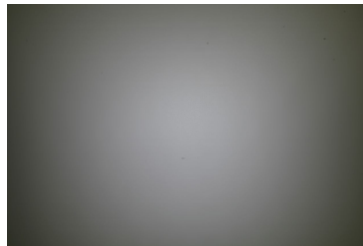

Light distribution files



LED XM-L2
 FWHM / FWTM 121.0° / 145.0 + 143.0°
 Efficiency 94 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

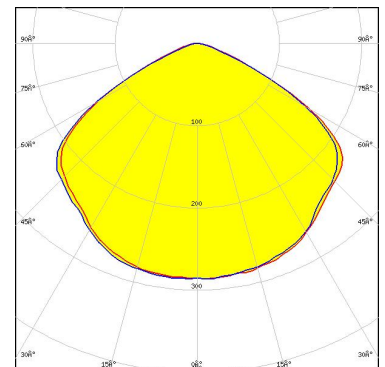


Light distribution files

OPTICAL RESULTS (MEASURED):





LED XM-L3
 FWHM / FWTM Asymmetric
 Efficiency 98 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

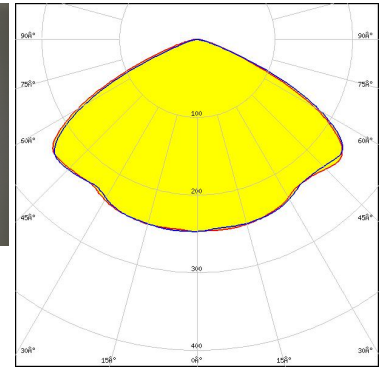

Light distribution files




LED XP-G
 FWHM / FWTM 131.0° / 152.0°
 Efficiency 94 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

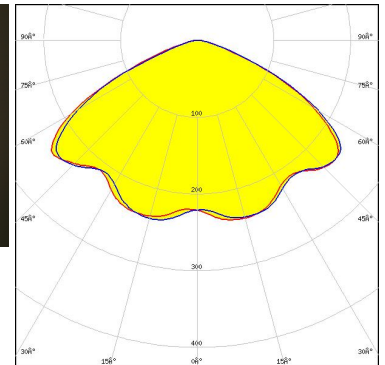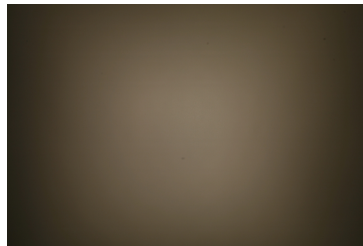

Light distribution files



LED XP-G2
 FWHM / FWTM 129.0° / 151.0°
 Efficiency 94 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

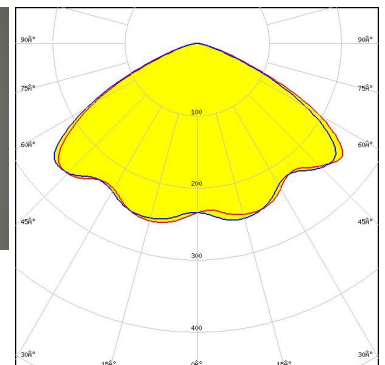


Light distribution files

OPTICAL RESULTS (MEASURED):





LED XP-G3
 FWHM / FWTM Asymmetric
 Efficiency 62 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 C17677_STRADA-2X2-SHD-BLK

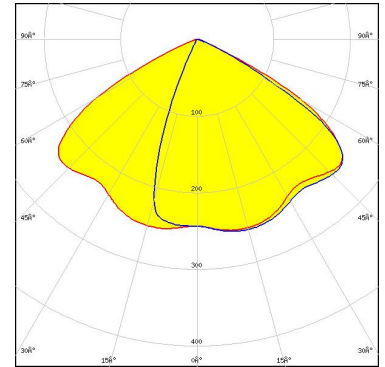

Light distribution files




LED XP-G3
 FWHM / FWTM 131.0 + 132.0° / 154.0°
 Efficiency 94 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

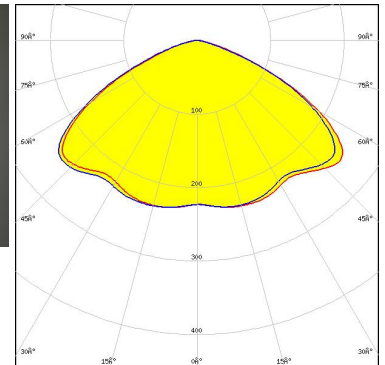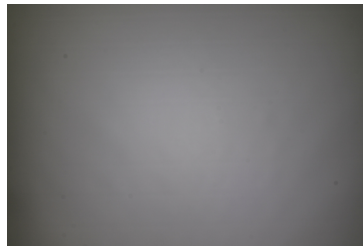

Light distribution files



LED XP-G3
 FWHM / FWTM Asymmetric
 Efficiency 83 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 C17580_STRADA-2X2-SHD-WHT

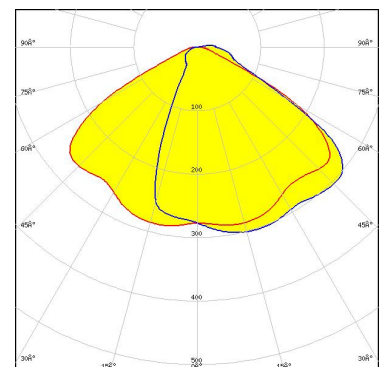


Light distribution files

OPTICAL RESULTS (MEASURED):




LED XP-L HD
 FWHM / FWTM 131.0° / 157.0°
 Efficiency 94 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

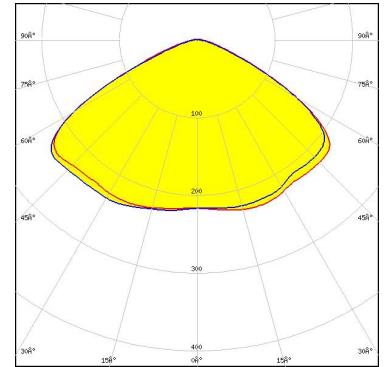

Light distribution files





LED XP-L HI
 FWHM / FWTM 127.0° / 150.0 + 147.0°
 Efficiency 94 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

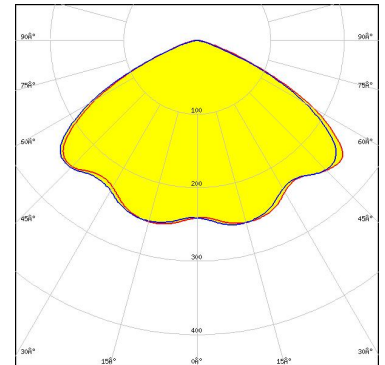

Light distribution files



LED XP-L2
 FWHM / FWTM 127.0° / 156.0 + 153.0°
 Efficiency 94 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

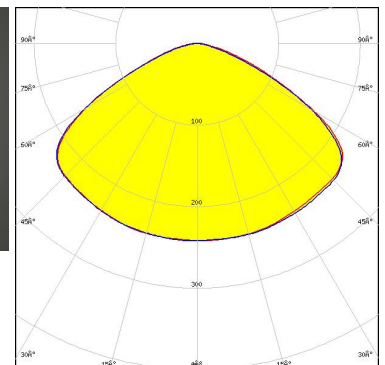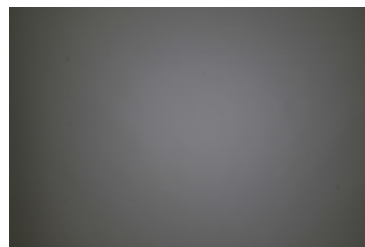


Light distribution files

OPTICAL RESULTS (MEASURED):




LED	XT-E
FWHM / FWTM	136.0° / 156.0°
Efficiency	94 %
Peak intensity	0.3 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

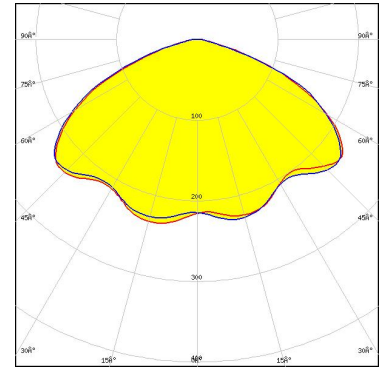

Light distribution files




LED	LUXEON 5050 Round LES
FWHM / FWTM	121.0° / 143.0°
Efficiency	94 %
Peak intensity	0.3 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

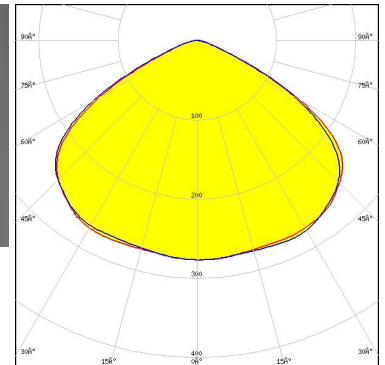

Light distribution files



LED	LUXEON MZ
FWHM / FWTM	123.0° / 144.0°
Efficiency	94 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	


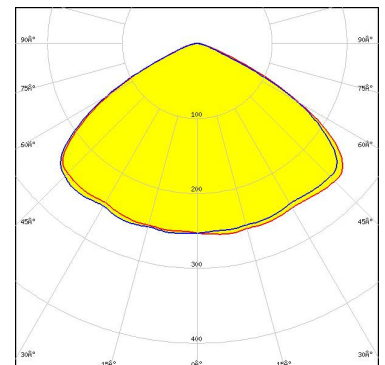


Light distribution files

OPTICAL RESULTS (MEASURED):




LED LUXEON Q
FWHM / FWTM 134.0° / 157.0°
Efficiency 94 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

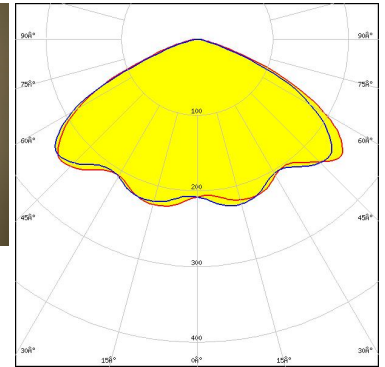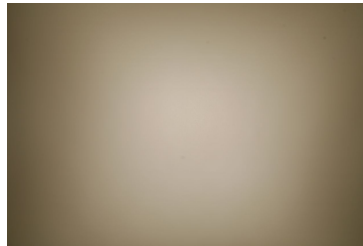

Light distribution files





LED LUXEON T
FWHM / FWTM 127.0° / 147.0°
Efficiency 94 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

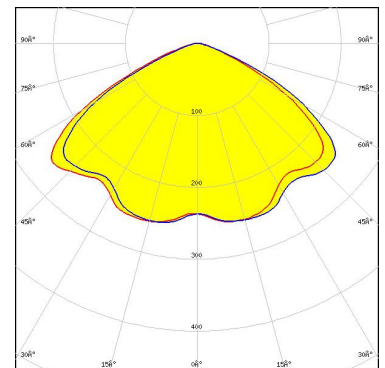

Light distribution files



LED LUXEON TX
FWHM / FWTM 123.0° / 146.0 + 143.0°
Efficiency 94 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

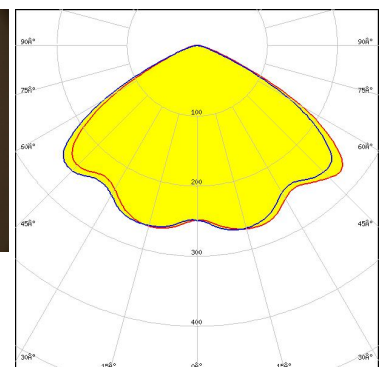
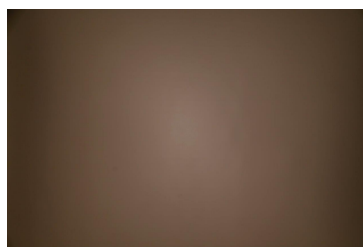


Light distribution files

OPTICAL RESULTS (MEASURED):




LED LUXEON V
 FWHM / FWTM 125.0 + 123.0° / 151.0 + 145.0°
 Efficiency 94 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

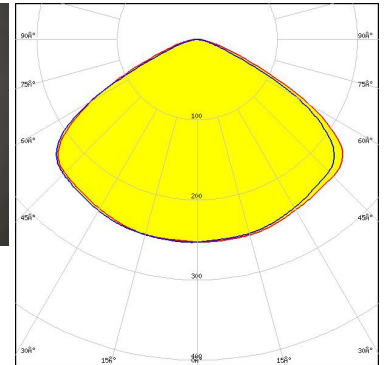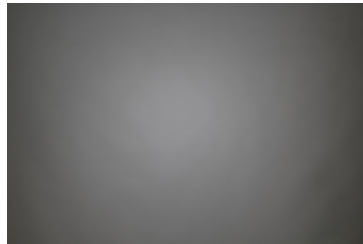

Light distribution files




LED SST-10-B130
 FWHM / FWTM 126.0° / 147.0°
 Efficiency 97 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type Deep Red
 Required components:

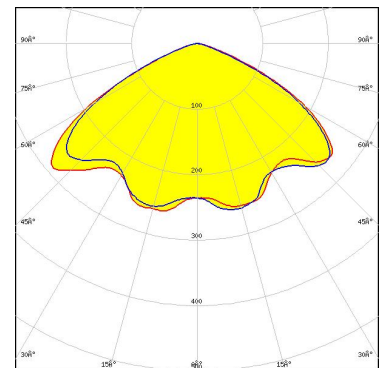

Light distribution files



LED RecLED 122x50mm 1900lm 730 2x4 Opt G1
 FWHM / FWTM Asymmetric
 Efficiency 98 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

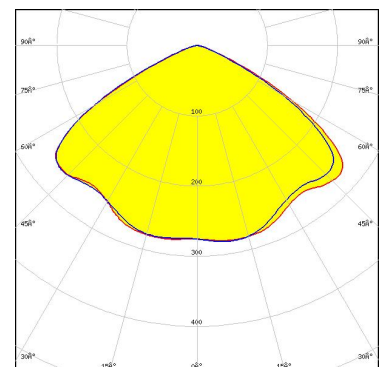


Light distribution files

OPTICAL RESULTS (MEASURED):




LED NVSW219D
 FWHM / FWTM Asymmetric
 Efficiency 94 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

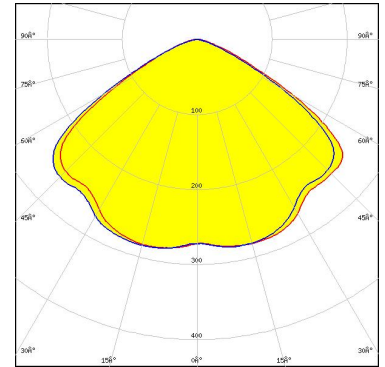

Light distribution files




LED NVSW219F
 FWHM / FWTM 123.0° / 143.0°
 Efficiency 97 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

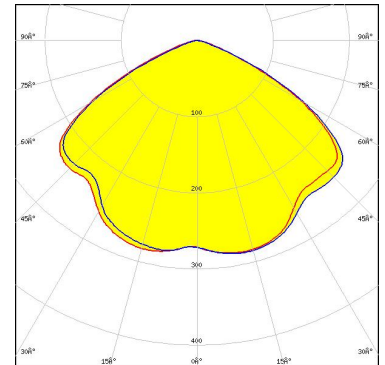

Light distribution files



LED NVSW319B
 FWHM / FWTM 125.0° / 144.0°
 Efficiency 98 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:


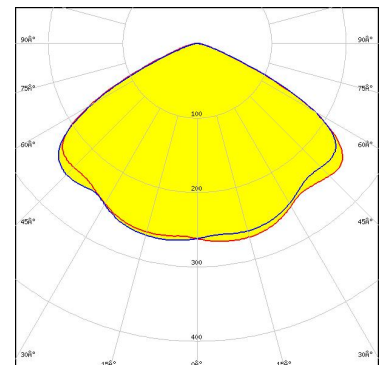


Light distribution files

OPTICAL RESULTS (MEASURED):




LED NVSW3x9A
 FWHM / FWTM 129.0 + 128.0° / 151.0 + 148.0°
 Efficiency 94 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

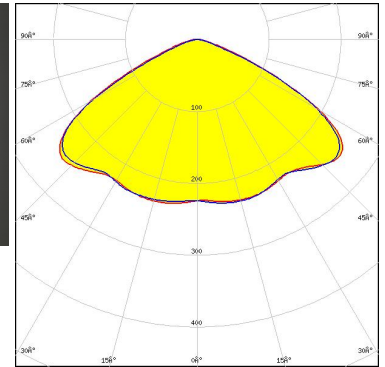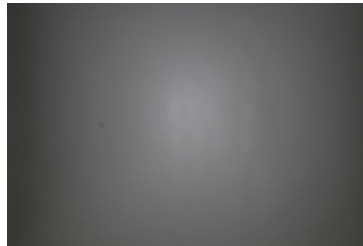

Light distribution files




LED NVSxE21A
 FWHM / FWTM 125.0° / 144.0°
 Efficiency 94 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

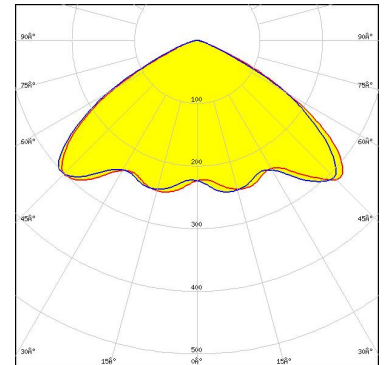

Light distribution files



LED Duris S8
 FWHM / FWTM 119.0° / 143.0°
 Efficiency 94 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

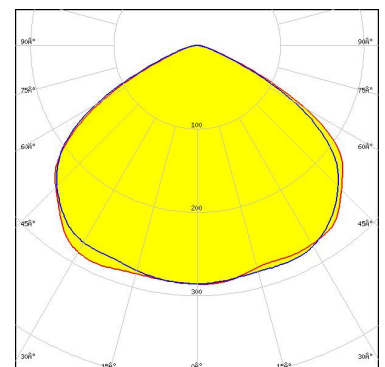


Light distribution files

OPTICAL RESULTS (MEASURED):

OSRAM
Opto Semiconductors


LED OSCONIQ P 3737 (3W version)
FWHM / FWTM Asymmetric
Efficiency 98 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

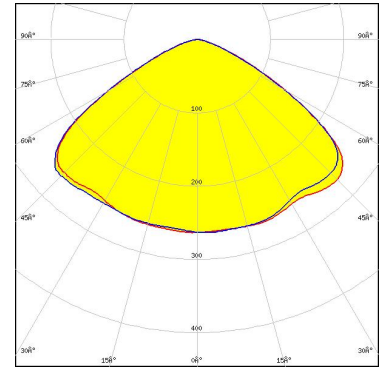

Light distribution files

OSRAM
Opto Semiconductors



LED OSLOM Square CSSRM2/CSSRM3
FWHM / FWTM 128.0 + 127.0° / 149.0 + 145.0°
Efficiency 94 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

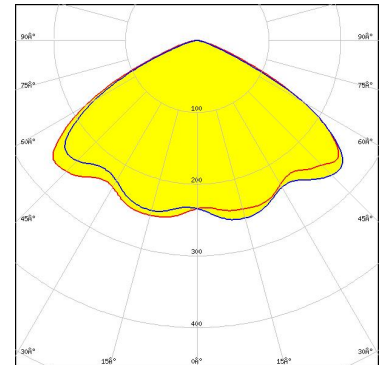

Light distribution files

OSRAM
Opto Semiconductors

LED OSLOM Square PC
FWHM / FWTM 122.0° / 154.0°
Efficiency 94 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

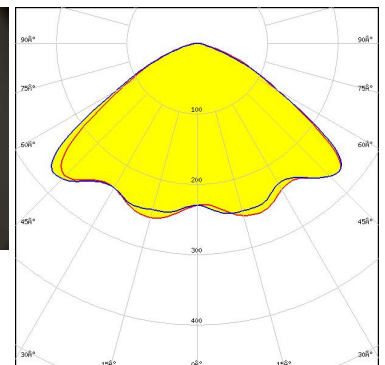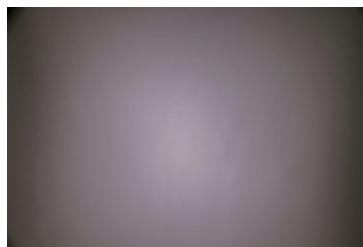


Light distribution files

OPTICAL RESULTS (MEASURED):

PHILIPS


LED Fortimo FastFlex LED 2x8 DA G4
 FWHM / FWTM 125.0° / 145.0°
 Efficiency 94 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

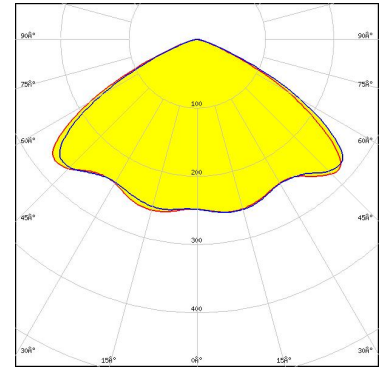

Light distribution files

PHILIPS


LED Fortimo FastFlex LED 2x8 DA G4+
 FWHM / FWTM 127.0° / 148.0°
 Efficiency 98 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

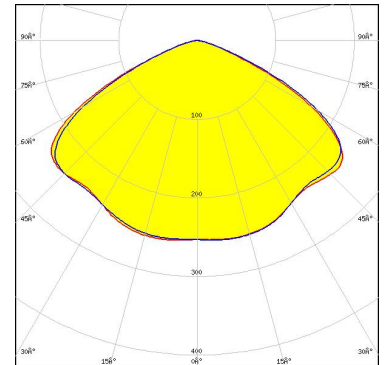

Light distribution files

PHILIPS

LED Fortimo FastFlex LED 2x8 DA G5
 FWHM / FWTM 122.0° / 142.0°
 Efficiency 98 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

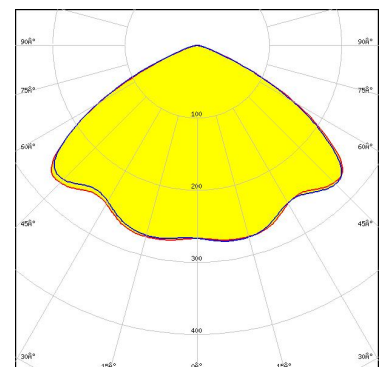


Light distribution files

OPTICAL RESULTS (MEASURED):

PHILIPS


LED	Fortimo FastFlex LED 2x8 DAX G4
FWHM / FWTM	131.0° / 154.0°
Efficiency	94 %
Peak intensity	0.3 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

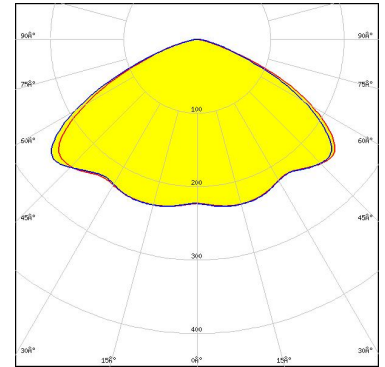

Light distribution files

SAMSUNG


LED	HiLOM RC12 Z (LH181B)
FWHM / FWTM	120.0° / 138.0°
Efficiency	99 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

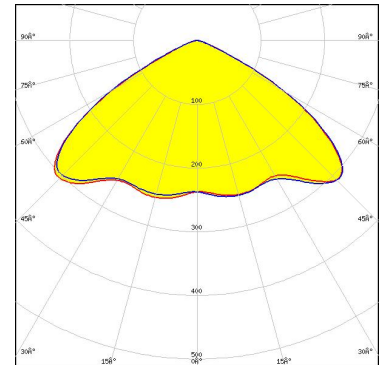

Light distribution files

SAMSUNG

LED	HiLOM RH12 Z (LH351C)
FWHM / FWTM	121.0° / 139.0°
Efficiency	97 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

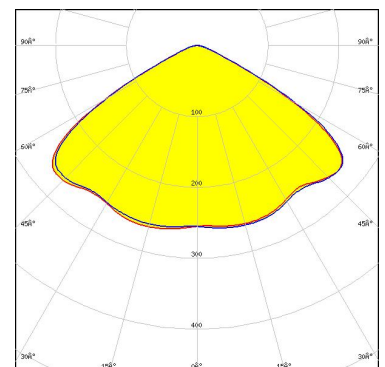


Light distribution files

OPTICAL RESULTS (MEASURED):

SAMSUNG


LED HiLOM RH16 (LH351C)
 FWHM / FWTM 121.0° / 139.0°
 Efficiency 94 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

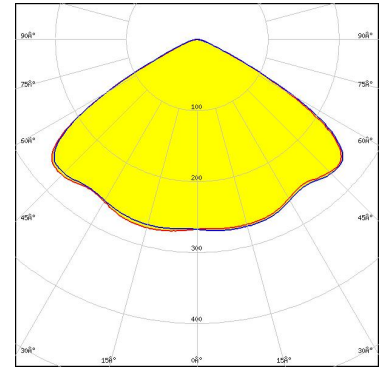

Light distribution files

SAMSUNG


LED HiLOM RM12 Z (LH502C)
 FWHM / FWTM 120.0° / 141.0°
 Efficiency 98 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

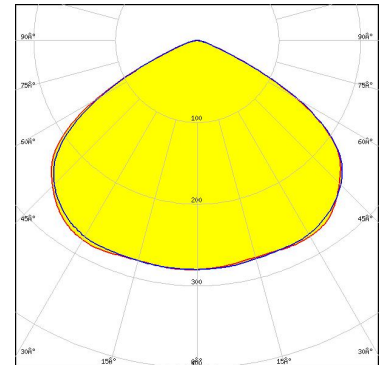

Light distribution files

SAMSUNG

LED HiLOM RM16 Z (LH502C)
 FWHM / FWTM 120.0° / 141.0°
 Efficiency 99 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

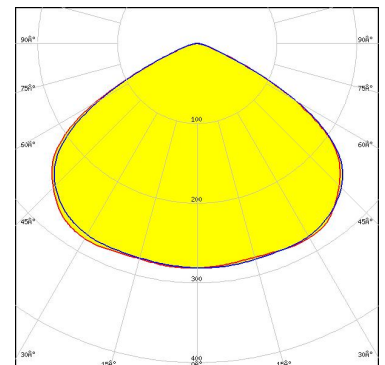


Light distribution files

OPTICAL RESULTS (MEASURED):

SAMSUNG


LED HiLOM RM8 Z (LH502C)
 FWHM / FWTM Asymmetric
 Efficiency 99 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

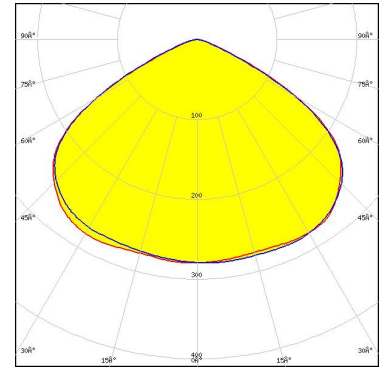

Light distribution files

SAMSUNG


LED LH351B
 FWHM / FWTM 126.0° / 149.0°
 Efficiency 94 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

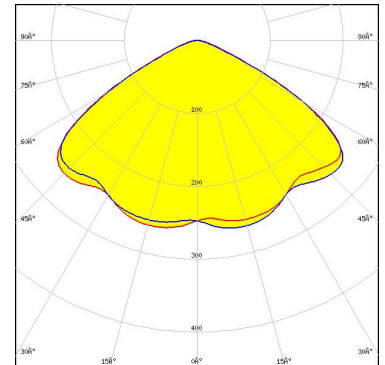

Light distribution files

SAMSUNG

LED LH351C
 FWHM / FWTM 123.0° / 144.0°
 Efficiency 94 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

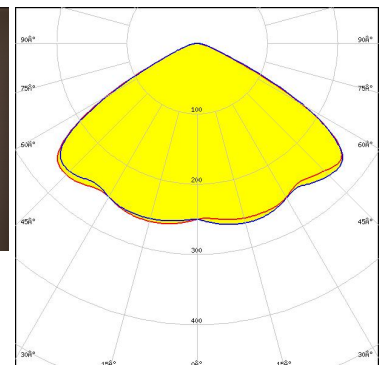


Light distribution files

OPTICAL RESULTS (MEASURED):

SAMSUNG

LED LH508A
 FWHM / FWTM 122.0° / 144.0 + 143.0°
 Efficiency 94 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

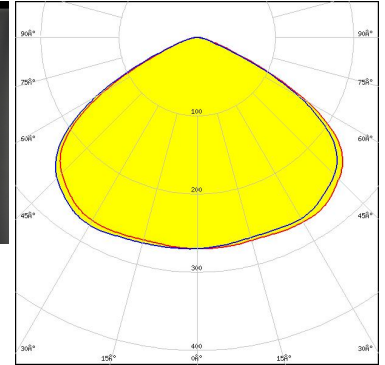


Light distribution files

SEITEC

Elektronik GmbH

LED LED-Pa-L15c2W11c2-xxx-C050-01
 FWHM / FWTM 123.0° / 142.0°
 Efficiency 98 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

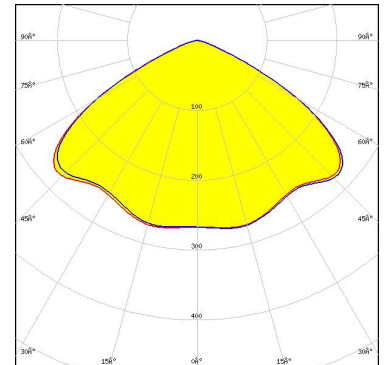


Light distribution files



SEOUL SEMICONDUCTOR

LED Z5M1/Z5M2
 FWHM / FWTM 122.0° / 149.0°
 Efficiency 94 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

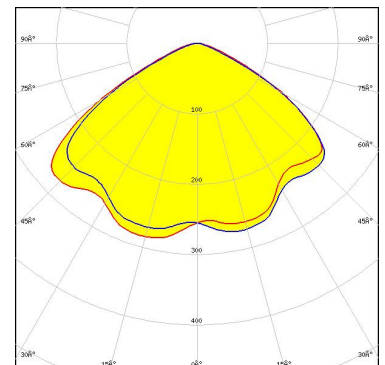


Light distribution files

OPTICAL RESULTS (MEASURED):




LED Z5M3
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

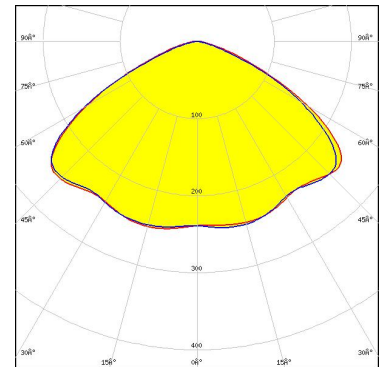

Light distribution files




LED Z5M4
FWHM / FWTM Asymmetric
Efficiency 97 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

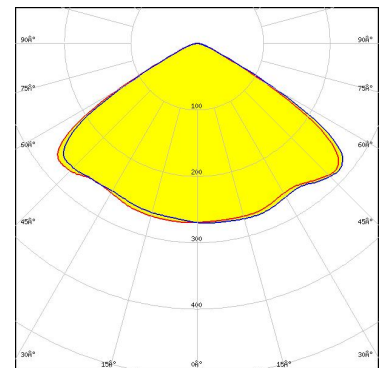

Light distribution files



LED Z8Y22
FWHM / FWTM 127.0 + 124.0° / 146.0 + 144.0°
Efficiency 94 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

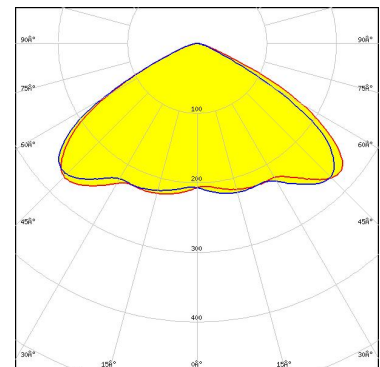



Light distribution files

OPTICAL RESULTS (MEASURED):

TOSHIBA

Leading Innovation >>>

LED	TL1L3
FWHM / FWTM	118.0° / 154.0°
Efficiency	94 %
Peak intensity	0.3 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

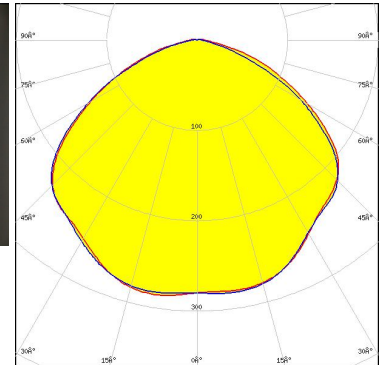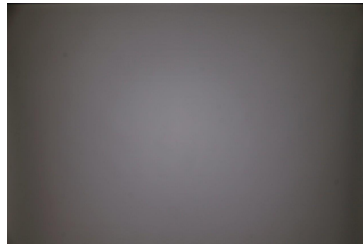


Light distribution files

TOSHIBA

Leading Innovation >>>

LED	TL1L4
FWHM / FWTM	119.0° / 146.0°
Efficiency	91 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

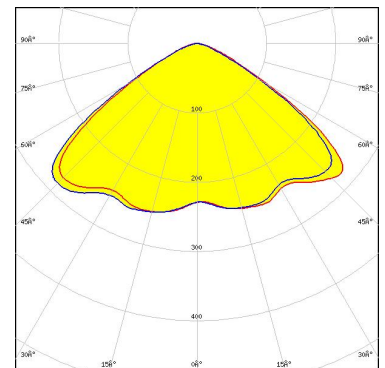

Light distribution files

TRIDONIC


LED	RLE 2x4 2000lm HP EXC2 OTD
FWHM / FWTM	128.0° / 147.0°
Efficiency	94 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Light distribution files

OPTICAL RESULTS (MEASURED):

TRIDONIC


LED RLE 2x8 4000lm HP EXC2 OTD
 FWHM / FWTM 128.0° / 147.0°
 Efficiency 94 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

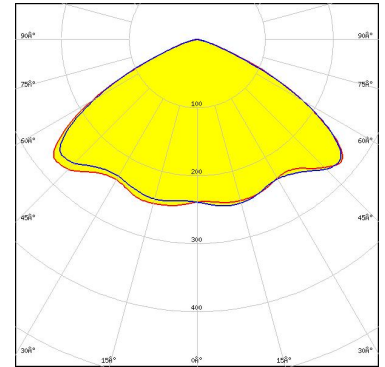

Light distribution files

TRIDONIC


LED RLE G1 49x121mm 2000lm xxx EXC OTD
 FWHM / FWTM 119.0 + 117.0° / 147.0 + 146.0°
 Efficiency 94 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

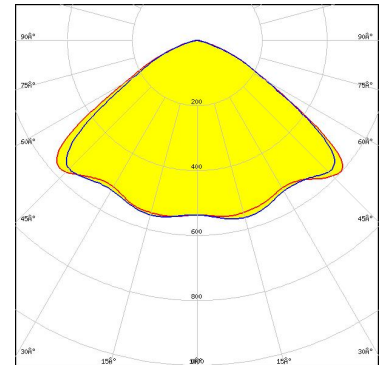

Light distribution files

TRIDONIC

LED RLE G1 49x133mm 2000lm xxx EXC OTD
 FWHM / FWTM 119.0 + 117.0° / 147.0 + 146.0°
 Efficiency 94 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

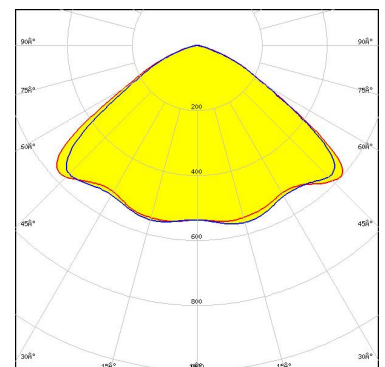


Light distribution files

OPTICAL RESULTS (MEASURED):

TRIDONIC


LED RLE G1 49x223mm 4000lm xxx EXC OTD
 FWHM / FWTM 119.0 + 117.0° / 147.0 + 146.0°
 Efficiency 94 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

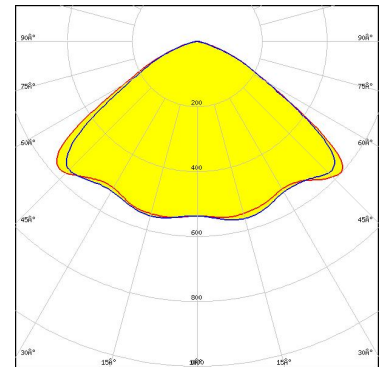

Light distribution files

TRIDONIC

LED RLE G1 49x245mm 4000lm xxx EXC OTD
 FWHM / FWTM 119.0 + 117.0° / 147.0 + 146.0°
 Efficiency 94 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

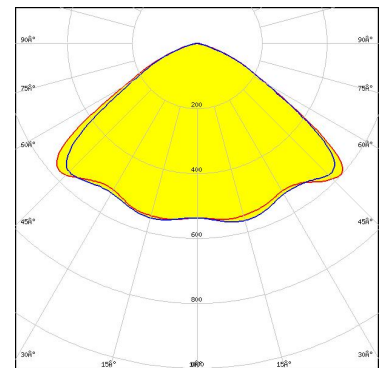

Light distribution files


OPTICAL RESULTS (SIMULATED):



LED J Series 5050B 6V K Class
 FWHM / FWTM 112.0° / 132.0°
 Efficiency 95 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:


Protective plate, glass

Light distribution files

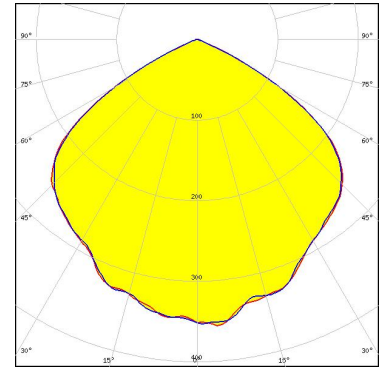


LED J Series 5050C 6V E Class
 FWHM / FWTM Asymmetric
 Efficiency 74 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 C17580_STRADA-2X2-SHD-WHT

Light distribution files

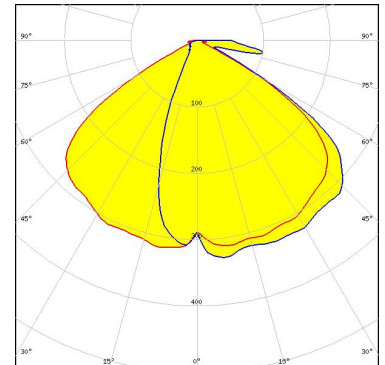

LED J Series 5050C 6V E Class
 FWHM / FWTM Asymmetric
 Efficiency 63 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 C17677_STRADA-2X2-SHD-BLK


Light distribution files

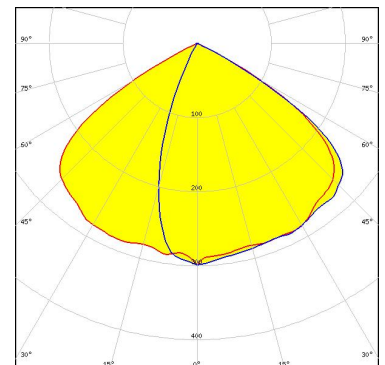

OPTICAL RESULTS (SIMULATED):




LED MHB-A/B
 FWHM / FWTM 117.0° + 116.0° / 140.0°
 Efficiency 94 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

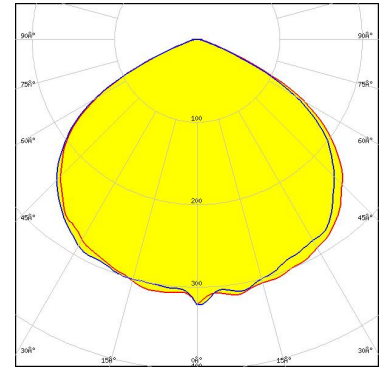

Light distribution files




LED XHP35 HD
 FWHM / FWTM Asymmetric
 Efficiency 96 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

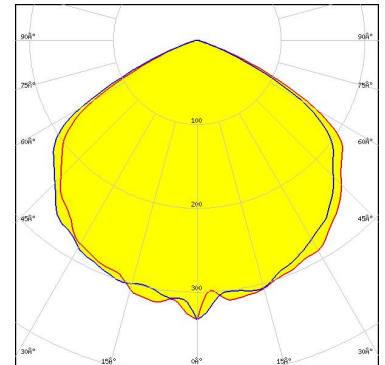

Light distribution files



LED XP-G2 HE
 FWHM / FWTM 126.0° / 138.0°
 Efficiency 95 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

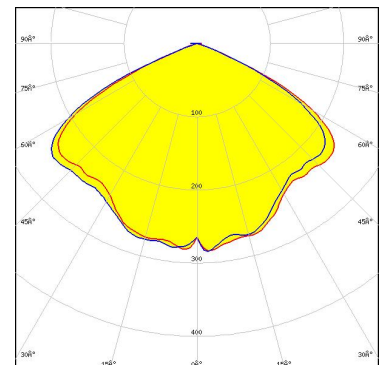

Light distribution files


OPTICAL RESULTS (SIMULATED):



LED XP-G3
 FWHM / FWTM 126.0° / 138.0°
 Efficiency 86 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:


Protective plate, glass

Light distribution files

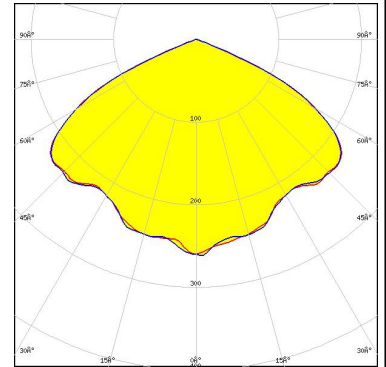


LED XP-G4
 FWHM / FWTM 116.0° / 126.0°
 Efficiency 96 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

Light distribution files

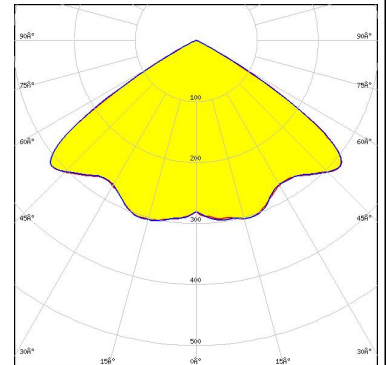

LED PrevaLED Brick HP 2x8
 FWHM / FWTM 122.0° / 136.0°
 Efficiency 92 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:


Light distribution files

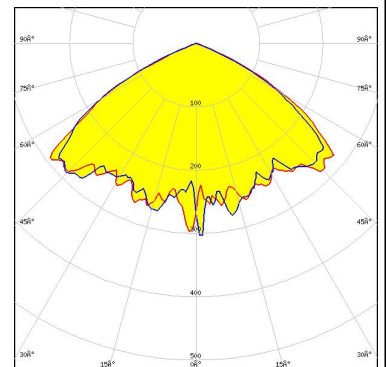

OPTICAL RESULTS (SIMULATED):




LED	LUXEON 3030 2D (Round LES)
FWHM / FWTM	118.0° / 131.0°
Efficiency	94 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

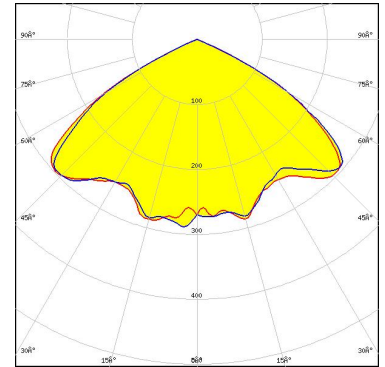

Light distribution files



LED	LUXEON 3030 2D (Round LES)
FWHM / FWTM	120.0° / 132.0°
Efficiency	88 %
Peak intensity	0.3 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

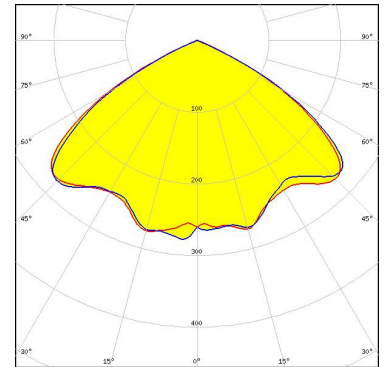


Light distribution files

Protective plate, glass



LED	LUXEON 3030 2D (Square LES)
FWHM / FWTM	119.0° / 133.0°
Efficiency	94 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

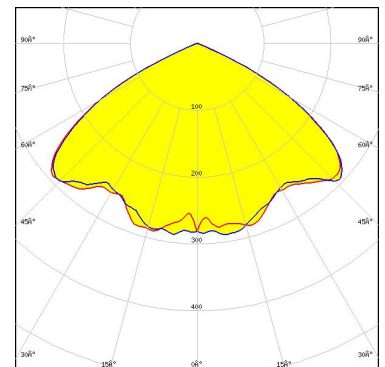


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED LUXEON 5050 HE
 FWHM / FWTM 120.0° / 134.0°
 Efficiency 96 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

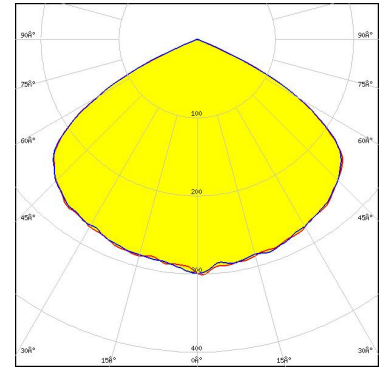

Light distribution files



LED LUXEON 5050 HE
 FWHM / FWTM 118.0° / 134.0°
 Efficiency 89 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

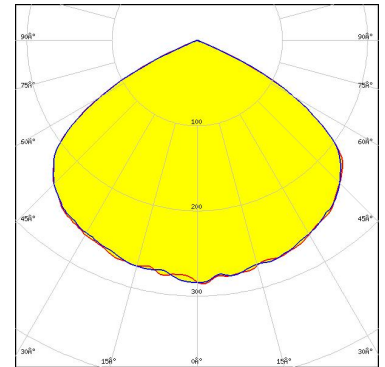


Protective plate, glass

Light distribution files



LED LUXEON 5050 HE Plus
 FWHM / FWTM Asymmetric
 Efficiency 62 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 C17677_STRADA-2X2-SHD-BLK

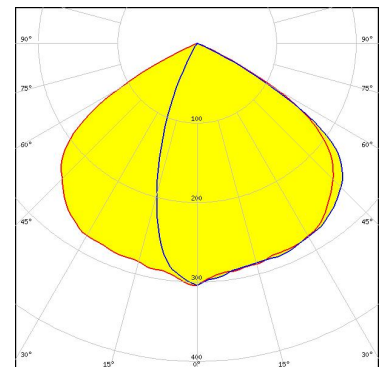

Light distribution files


OPTICAL RESULTS (SIMULATED):



LED LUXEON 5050 HE Plus
 FWHM / FWTM 117.0° / 134.0°
 Efficiency 89 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:


Protective plate, glass

Light distribution files

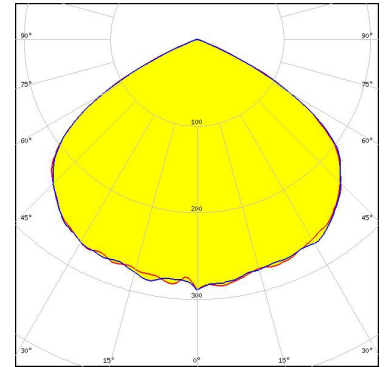


LED LUXEON 5050 HE Plus
 FWHM / FWTM Asymmetric
 Efficiency 74 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 C17580_STRADA-2X2-SHD-WHT

Light distribution files

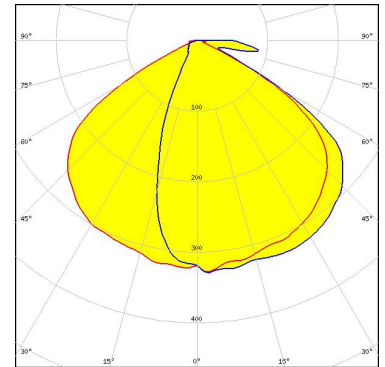

LED LUXEON 5050 HE Plus
 FWHM / FWTM 120.0° / 136.0°
 Efficiency 96 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

Light distribution files

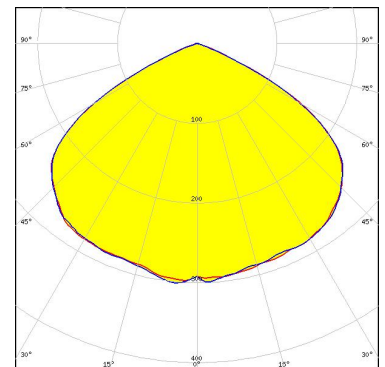


OPTICAL RESULTS (SIMULATED):



LED LUXEON 5050 Round LES
 FWHM / FWTM 117.0° / 132.0°
 Efficiency 89 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

Protective plate, glass


Light distribution files

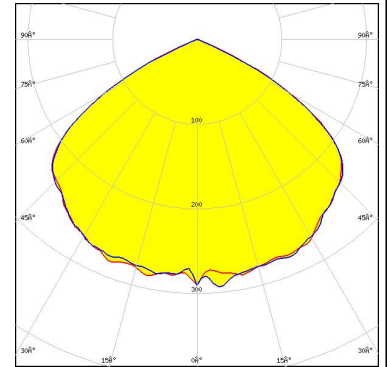

LED LUXEON 5050 Square LES
 FWHM / FWTM 114.0° / 132.0°
 Efficiency 89 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:


Protective plate, glass

Light distribution files

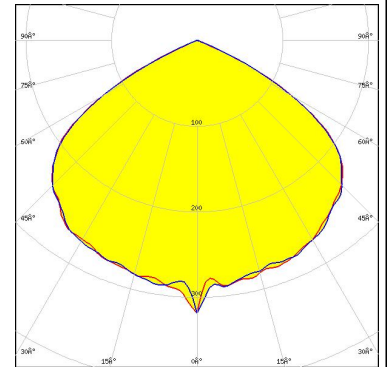

LED LUXEON 5050 Square LES
 FWHM / FWTM 118.0° / 134.0°
 Efficiency 96 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:


Light distribution files

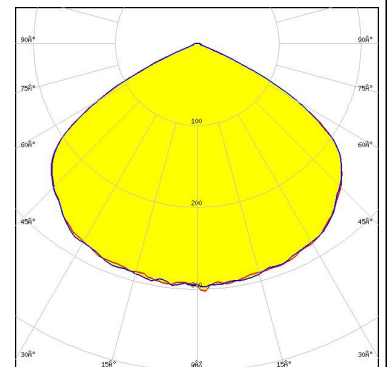

OPTICAL RESULTS (SIMULATED):




LED LUXEON HL2Z
 FWHM / FWTM 122.0° / 132.0°
 Efficiency 96 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

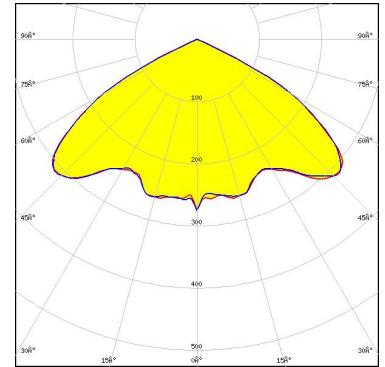

Light distribution files



LED LUXEON HL2Z
 FWHM / FWTM 120.0° / 132.0°
 Efficiency 89 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

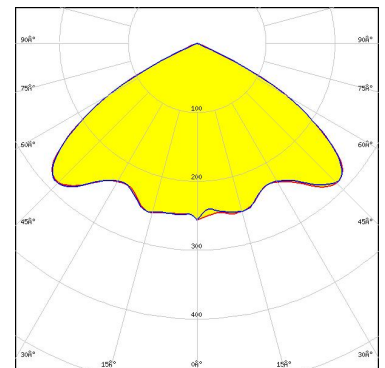


Light distribution files

Protective plate, glass



LED LUXEON XR-HL2X (L2H2-xxxxxxxMLU010)
 FWHM / FWTM 122.0° / 132.0°
 Efficiency 96 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

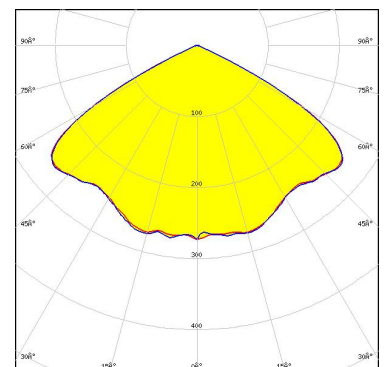

Light distribution files


OPTICAL RESULTS (SIMULATED):



LED	LUXEON XR-HL2X (L2H2-xxxxxxxMLU010)
FWHM / FWTM	122.0° / 132.0°
Efficiency	86 %
Peak intensity	0.3 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass


Light distribution files

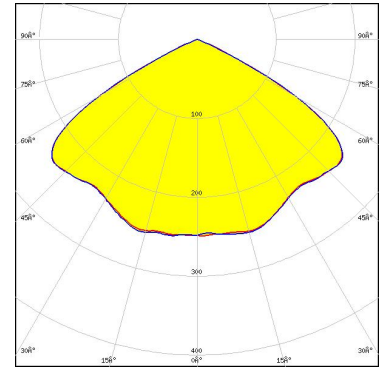

LED	NF2x757G
FWHM / FWTM	120.0° / 134.0°
Efficiency	89 %
Peak intensity	0.3 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	


Protective plate, glass

Light distribution files

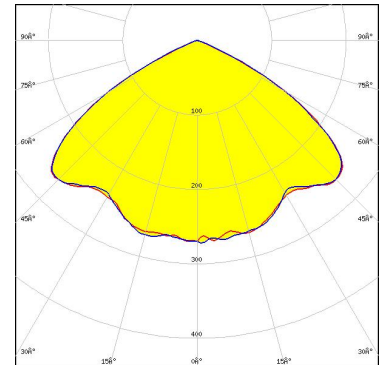

LED	NFMW48xA
FWHM / FWTM	120.0° / 134.0°
Efficiency	96 %
Peak intensity	0.3 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	


Light distribution files

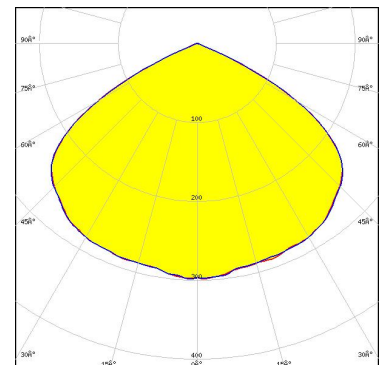

OPTICAL RESULTS (SIMULATED):




LED NV4WB35AM
 FWHM / FWTM 120.0° / 136.0°
 Efficiency 96 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

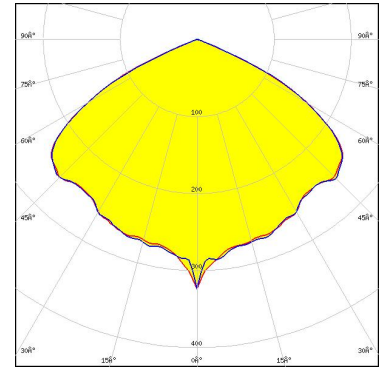

Light distribution files




LED NVSW219F
 FWHM / FWTM 122.0° / 138.0°
 Efficiency 94 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

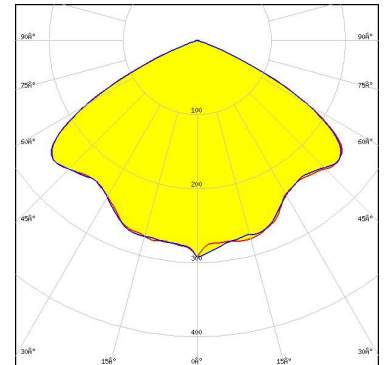

Light distribution files



LED NVSW319B
 FWHM / FWTM 126.0° / 134.0°
 Efficiency 88 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

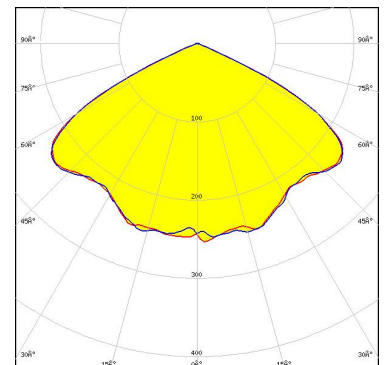


Protective plate, glass

Light distribution files

OPTICAL RESULTS (SIMULATED):




LED NVSW519A
 FWHM / FWTM 126.0° / 136.0°
 Efficiency 93 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

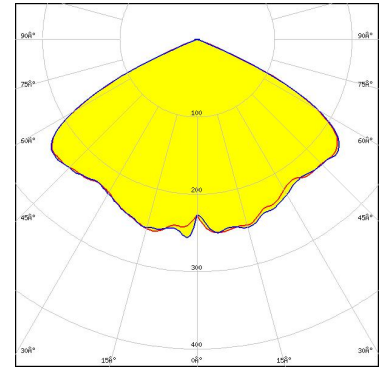

Light distribution files



LED NVSW519A
 FWHM / FWTM 125.0° / 136.0°
 Efficiency 89 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

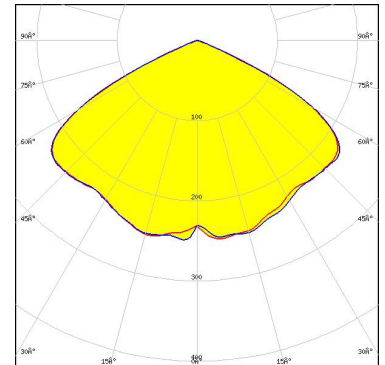


Light distribution files

Protective plate, glass



LED NVSxx19B/NVSxx19C
 FWHM / FWTM 122.0° / 132.0°
 Efficiency 94 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

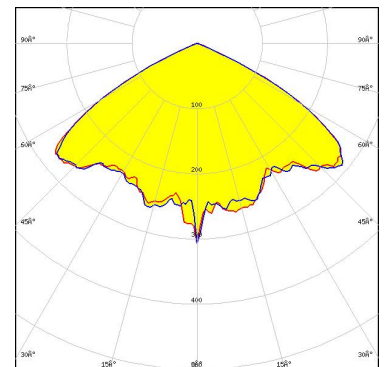


Light distribution files

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED Duris S8
FWHM / FWTM Asymmetric
Efficiency 73 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
C17580_STRADA-2X2-SHD-WHT

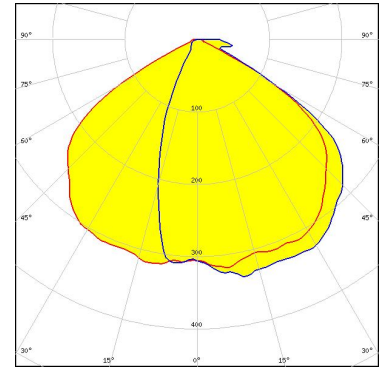

Light distribution files

OSRAM
Opto Semiconductors


LED Duris S8
FWHM / FWTM Asymmetric
Efficiency 63 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
C17677_STRADA-2X2-SHD-BLK

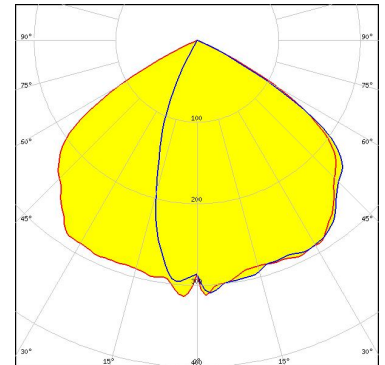

Light distribution files

OSRAM
Opto Semiconductors

LED OSCONIQ P 3030
FWHM / FWTM 125.0° / 141.0°
Efficiency 96 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

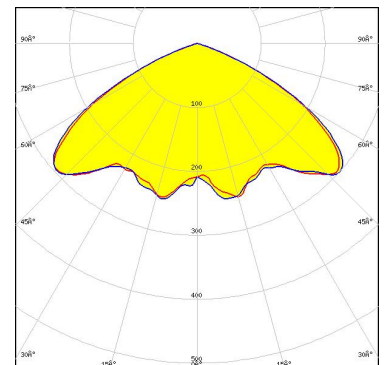


Light distribution files

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED OSCONIQ P 3737 (2W version)
FWHM / FWTM 114.0° / 134.0°
Efficiency 93 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

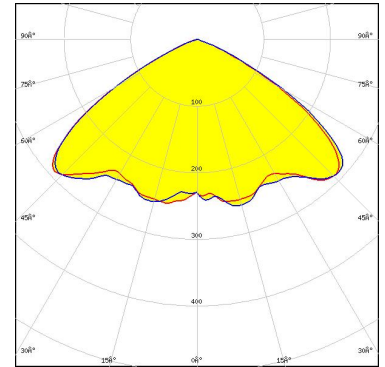

Light distribution files

OSRAM
Opto Semiconductors


LED OSCONIQ P 3737 (3W version)
FWHM / FWTM 106.0 + 114.0° / 129.0 + 133.0°
Efficiency 94 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

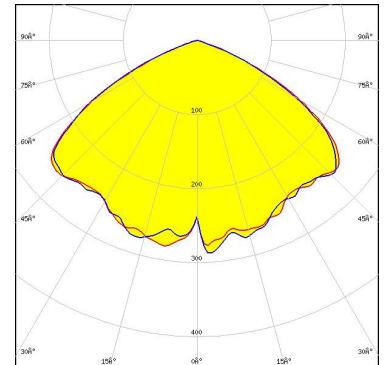

Light distribution files

OSRAM
Opto Semiconductors

LED OSCONIQ S 5050 SFC
FWHM / FWTM Asymmetric
Efficiency 63 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
C17677_STRADA-2X2-SHD-BLK

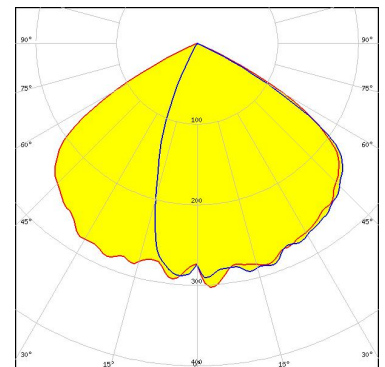


Light distribution files

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED: OSCONIQ S 5050 SFC
FWHM / FWTM: 116.0° / 134.0°
Efficiency: 96 %
Peak intensity: 0.3 cd/lm
LEDs/each optic: 1
Light colour/type: White
Required components:

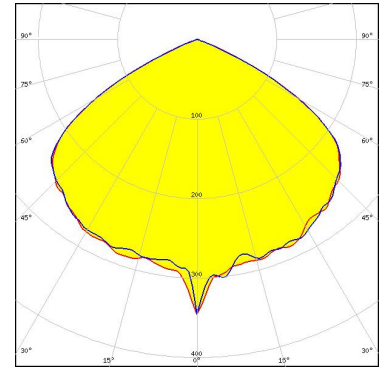

Light distribution files

OSRAM
Opto Semiconductors


LED: OSCONIQ S 5050 SFC
FWHM / FWTM: Asymmetric
Efficiency: 73 %
Peak intensity: 0.4 cd/lm
LEDs/each optic: 1
Light colour/type: White
Required components:
C17580_STRADA-2X2-SHD-WHT

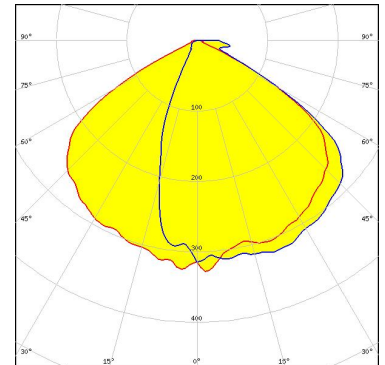

Light distribution files

OSRAM
Opto Semiconductors

LED: OSLOM Square CSSRM2/CSSRM3
FWHM / FWTM: Asymmetric
Efficiency: 57 %
Peak intensity: 0.3 cd/lm
LEDs/each optic: 1
Light colour/type: White
Required components:
C17677_STRADA-2X2-SHD-BLK

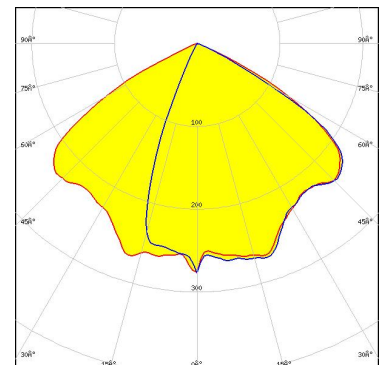

Light distribution files

Protective plate, glass


OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3
FWHM / FWTM 122.0° / 134.0°
Efficiency 89 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

Protective plate, glass

Light distribution files

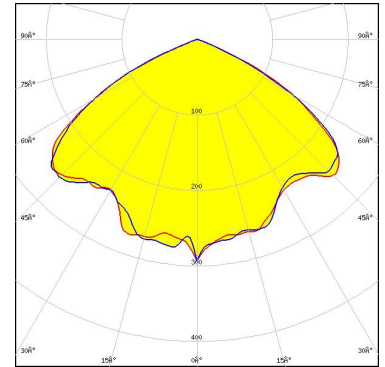


PHILIPS

LED Fortimo FastFlex LED 2x2 DA G5
FWHM / FWTM Asymmetric
Efficiency 57 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
C17677_STRADA-2X2-SHD-BLK

Protective plate, glass


Light distribution files

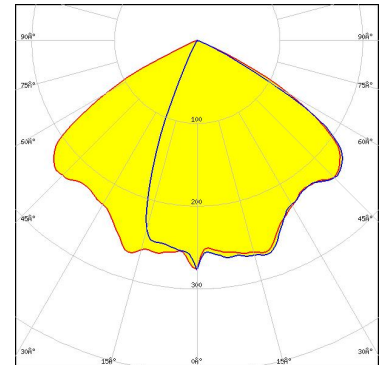

PHILIPS

LED Fortimo FastFlex LED 2x8 DA (U)HE
FWHM / FWTM 116.0° / 132.0°
Efficiency 96 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

Light distribution files

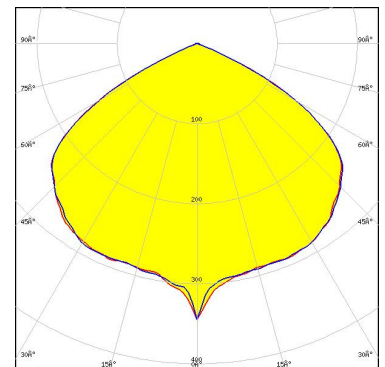


OPTICAL RESULTS (SIMULATED):

PHILIPS

LED	Fortimo FastFlex LED 2x8 DA (U)HE
FWHM / FWTM	116.0° / 132.0°
Efficiency	87 %
Peak intensity	0.3 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass

Light distribution files

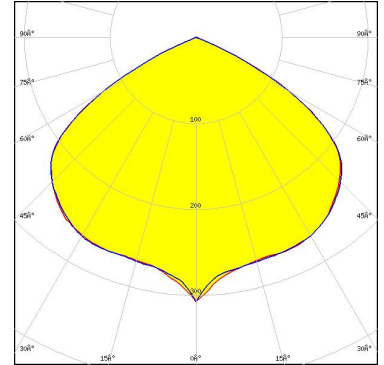


SAMSUNG

LED	HiLOM RH12 Z (LH351C)
FWHM / FWTM	121.0° / 138.0°
Efficiency	87 %
Peak intensity	0.3 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass


Light distribution files

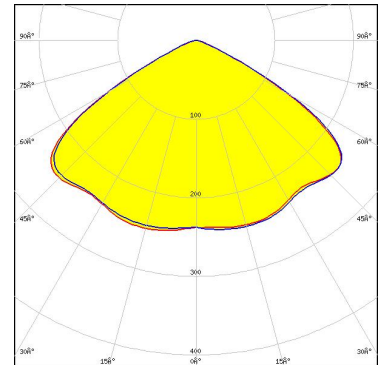

SAMSUNG

LED	LH231B
FWHM / FWTM	120.0° / 132.0°
Efficiency	95 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Light distribution files

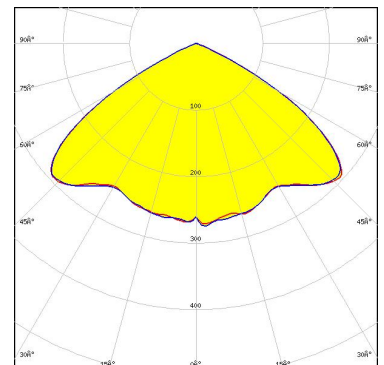


OPTICAL RESULTS (SIMULATED):

SAMSUNG

LED LH351B
FWHM / FWTM 118.0° / 130.0°
Efficiency 89 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

Protective plate, glass


Light distribution files

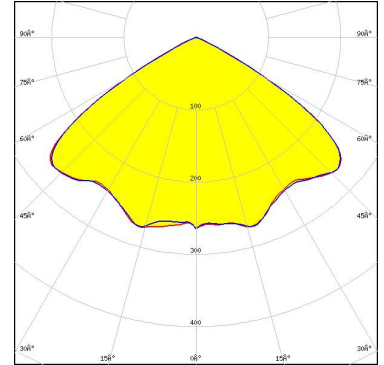

SAMSUNG

LED LH351D
FWHM / FWTM 120.0° / 134.0°
Efficiency 95 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:


Light distribution files

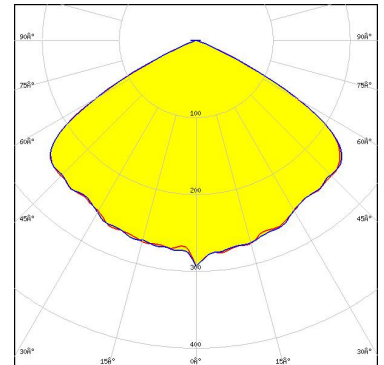

SAMSUNG

LED LH502D
FWHM / FWTM 118.0° / 134.0°
Efficiency 96 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:


Light distribution files

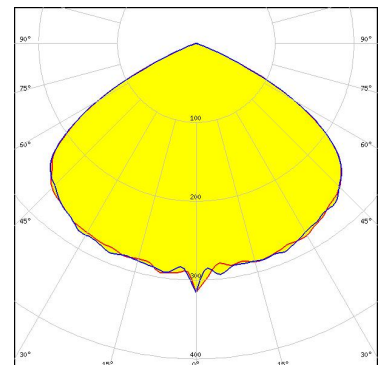

OPTICAL RESULTS (SIMULATED):

SAMSUNG


LED LH502D
 FWHM / FWTM Asymmetric
 Efficiency 73 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 C17580_STRADA-2X2-SHD-WHT

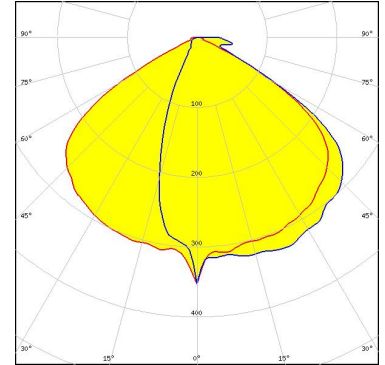

Light distribution files

SAMSUNG


LED LH502D
 FWHM / FWTM Asymmetric
 Efficiency 62 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 C17677_STRADA-2X2-SHD-BLK

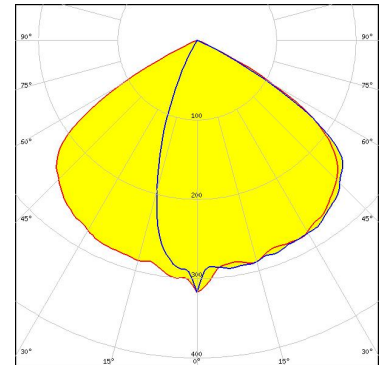

Light distribution files



LED MJT 5050
 FWHM / FWTM 118.0° / 132.0°
 Efficiency 96 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:


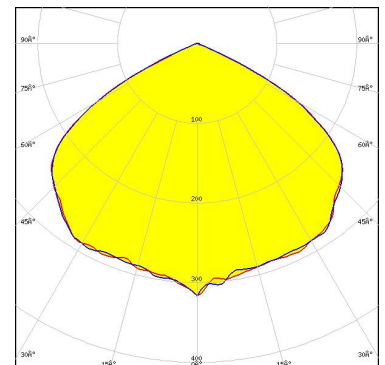


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED Seoul 5050 G-Series
 FWHM / FWTM 118.0° / 132.0°
 Efficiency 96 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

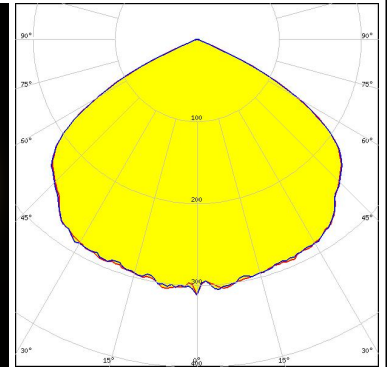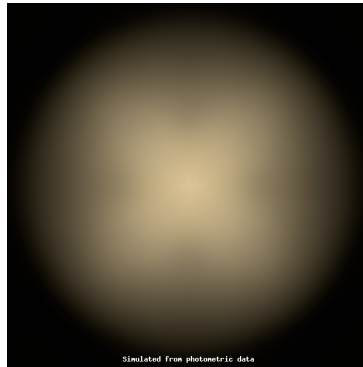

Light distribution files



LED Seoul 5050 G-Series
 FWHM / FWTM 116.0° / 132.0°
 Efficiency 88 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

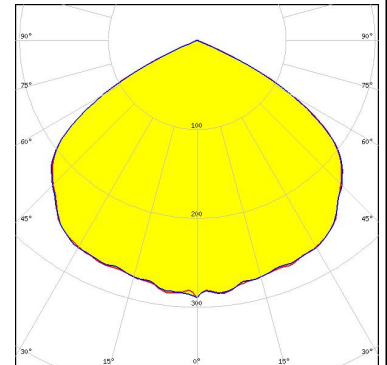


Protective plate, glass

Light distribution files



LED SEOUL DC 5050 6V
 FWHM / FWTM Asymmetric
 Efficiency 74 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 C17580_STRADA-2X2-SHD-WHT

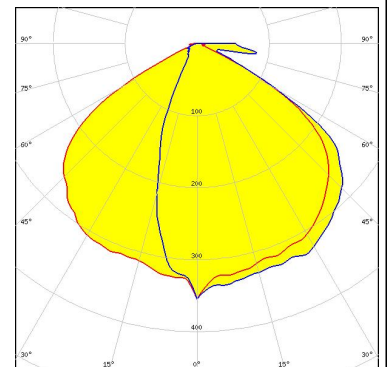


Light distribution files

OPTICAL RESULTS (SIMULATED):





LED: SEOUL DC 5050 6V
 FWHM / FWTM: Asymmetric
 Efficiency: 63 %
 Peak intensity: 0.3 cd/lm
 LEDs/each optic: 1
 Light colour/type: White
 Required components:
 C17677_STRADA-2X2-SHD-BLK

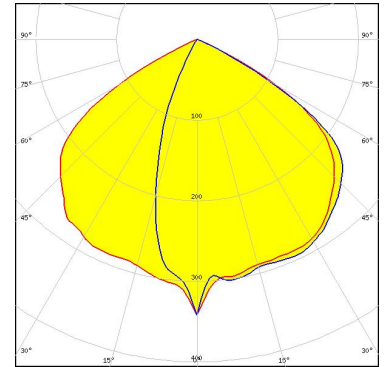

Light distribution files




LED: Z5M3-E1
 FWHM / FWTM: 118.0° / 128.0°
 Efficiency: 96 %
 Peak intensity: 0.4 cd/lm
 LEDs/each optic: 1
 Light colour/type: White
 Required components:

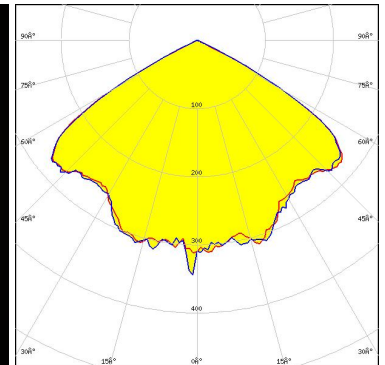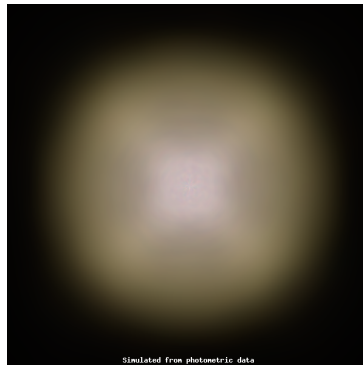

Light distribution files



LED: Z5M3-E1
 FWHM / FWTM: 118.0° / 128.0°
 Efficiency: 88 %
 Peak intensity: 0.3 cd/lm
 LEDs/each optic: 1
 Light colour/type: White
 Required components:

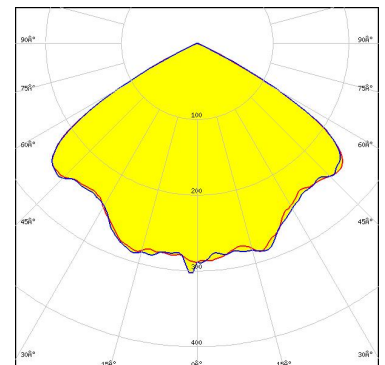


Protective plate, glass

Light distribution files

OPTICAL RESULTS (SIMULATED):




LED Z5M4-E1
 FWHM / FWTM 120.0° / 134.0°
 Efficiency 96 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

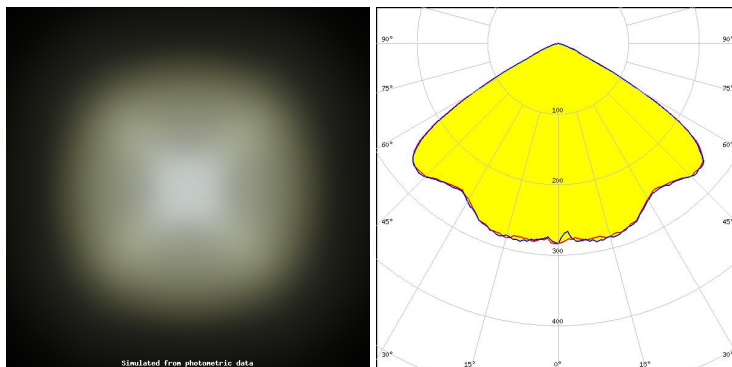

Light distribution files



LED Z5M4-E2
 FWHM / FWTM 120.0° / 130.0°
 Efficiency 96 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

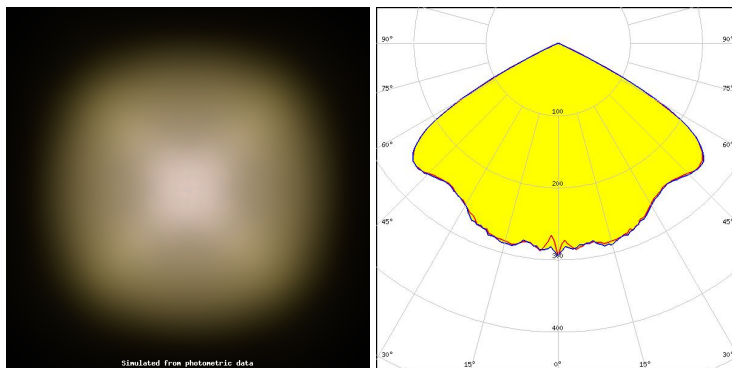

Light distribution files

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 7
FI-24100 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Poznan, Poland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)