

115T-XAA1 stands for connector only.
It's need to used with SIM card tray
(P/N: 115-00004)

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2020/06/16
2	ECR2000012	FROS	2020/08/24
3	ECR2100010	FROS	2021/04/01

SPECIFICATION:

1. ELECTRICAL
 - 1.1 Current Rating: 1A Max, 10u A Min.
 - 1.2 Voltage Rating: 50V Max
 - 1.3 Contact Resistance: 50mΩ
 - 1.4 Insulation Resistance: 1,000MΩ / 500V DC
 - 1.5 Dielectric Withstanding Voltage: 500V AC at 1 minute
2. MECHANICAL
 - 2.1 Durability: 5,000 Cycle Min.
 - 2.2 Press Force: 0.5N
3. ENVIRONMENTAL
 - 3.1 Operating temperature range: -40°C~+85°C
 - 3.2 Storage temperature range: -40°C~+85°C
4. SOLDER ABILITY
 - 4.1 Recommended IR-Reflow Temperature: 260°C 10Sec

How to order

1 1 5 T - X A A 1

Pin count

P/N	1 1 5 T - A A A 1	6 PIN
	1 1 5 T - B A A 1	8 PIN

7	Link	Stainless Steel
6	Knob	LCP, UL94V-0, Yellow
5	Spring	Stainless Steel
4	Hook	Stainless Steel
3	Rivet	Brass, nickel plating
2	Contact	Phosphor Bronze , Selected Gold Plating on contact area, Tin plating on solder tail, under plating nickel over all
1	Housing	LCP, UL94V-0, Black
NO.	PART NAME	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE


UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°



WWW.ATTEND.COM.TW

DRAWN	Fros	2020/06/16	DRAWN NAME:	SIM Card Socket, Bar Push w/Switch, 1u", Reel
CHECKED	Tim	2020/06/16	PRODUCT NO.	see how to order
APPROVED	Ken	2020/06/16	SCALE	1.6/1
	SHEET	1/2	SIZE	A4
	FILE NAME	115T-XAA1_B_3		



REV.	DESCRIPTION	DRAWN	DATE
	SEE SHEET ONE		

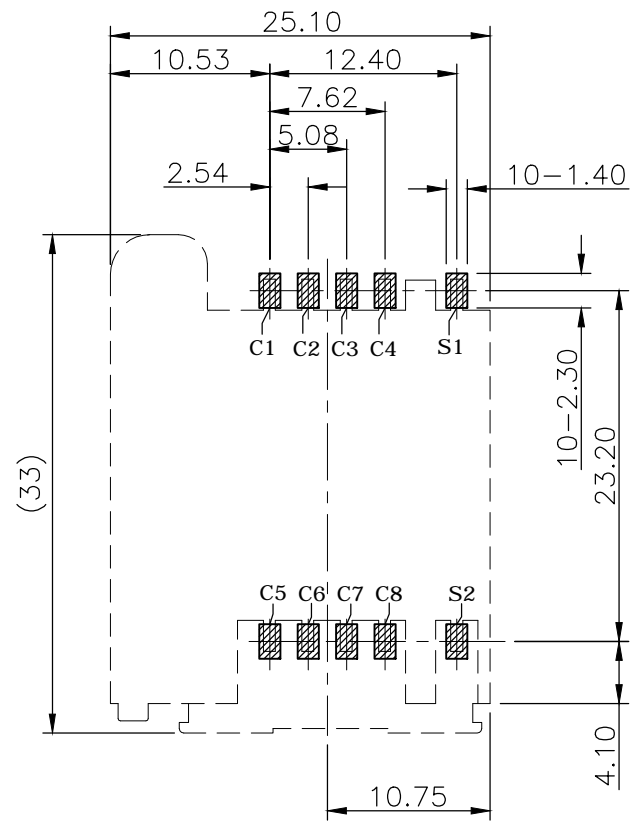

RECOMMENDED LAYOUT (TOP VIEW)
GENERAL TOLERANCE: ±0.1mm

SWITCH CIRCUIT	
When Tray is Ejected	When Tray is Inserted
OPEN	CLOSE
S1 S2	S1 S2

PIN OUT				
C1	C2	C3	C4	S1
Vcc	RST	CLK	NC	CD
C5	C6	C7	C8	S2
GND	Vpp	I/O	NC	SW

UNLESS OTHERWISE SPECIFIED TOLERANCE				 WWW.ATTEND.COM.TW	
UNIT:	DECIMAL	LINEAR	ANGLES		
mm	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
DRAWN	Fros	2020/06/16	DRAWN NAME:		
CHECKED	Tim	2020/06/16	SIM Card Socket, Bar Push w/Switch, 1u", Reel		
APPROVED	Ken	2020/06/16	PRODUCT NO.	see how to order	
	SCALE	SHEET	SIZE	FILE NAME	
	2/1	2/2	A4	115T-XAA1_B_3	