

ADELIA-75-S

~15° spot beam

SPECIFICATION:

Dimensions Ø 74.7 Height 42.8 mm Fastening snaps **ROHS** compliant yes 🕕



MATERIALS:

Material Colour Component **Type Finish** Coating ADELIA-75-S Reflector Aluminium Anodized metal gloss

ORDERING INFORMATION:


Component Qty in box MOQ MPQ Box weight (kg)

840 C18427_ADELIA-75-S 70 70 16.2

» Box size: 400 x 300 x 300 mm



PRODUCT C18427_ADELIA-75-S

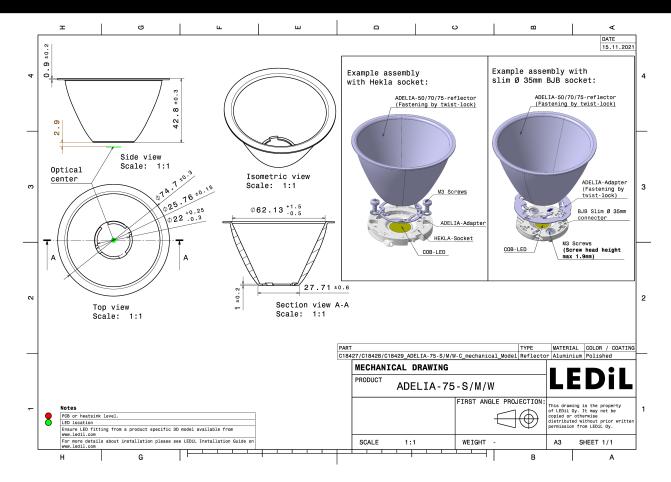

See also our general installation guide: www.ledil.com/installation_guide



OPTICAL RESULTS (SIMULATED):



LED V18 Gen 8-9
FWHM / FWTM 22.0° / 56.0°
Efficiency 79 %
Peak intensity 3.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:


C18432_ADELIA-ADAPTER-C
Bender Wirth: 639b Hekla XL

Light distribution files



LED V6 HD Gen 7
FWHM / FWTM 8.0° / 16.1°
Efficiency 93 %
Peak intensity 24 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

F15253_HEKLA-SOCKET-A C18432_ADELIA-ADAPTER-C



Light distribution files


SAMSUNG

LED LC003D / LC006D / LC009D / LC013D

FWHM / FWTM 12.1° / 24.1°
Efficiency 90 %
Peak intensity 10.4 cd/lm
LEDs/each optic 1

Light colour/type White Required components: F17435_HEKLA-G2-C

C18432_ADELIA-ADAPTER-C



Light distribution files



OPTICAL RESULTS (SIMULATED):

SAMSUNG


LED LC016D / LC019D / LC026D / LC033D

FWHM / FWTM 18.1° / 43.2 + 44.2°

Efficiency 88 %
Peak intensity 4.6 cd/lm
LEDs/each optic 1
Light colour/type White

Required components: F17438_HEKLA-G2-I

C18432_ADELIA-ADAPTER-C



Light distribution files



PRODUCT DATASHEET C18427_ADELIA-75-S

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 7 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Poznan, Poland Hong Kong, China

Distribution Partners

www.ledil.com/ where_to_buy