

TINA-Y-W

~36° wide beam. Assembly with holder, installation tape and pins

SPECIFICATION:

Dimensions	Ø 16.1 mm
Height	10 mm
Fastening	tape, pin
ROHS compliant	yes ⓘ


MATERIALS:

Component	Type	Material	Colour	Finish	Length
TINA-Y-W	Single lens	PMMA	clear	gloss	14.7
TINA-Y-HLD	Holder	PC	black	gloss	16.1
TINA-Y-TAPE	Tape	Acrylic foam			

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
CA18105_TINA-Y-W » Box size: 476 x 273 x 197 mm	3900	300	300	6.0




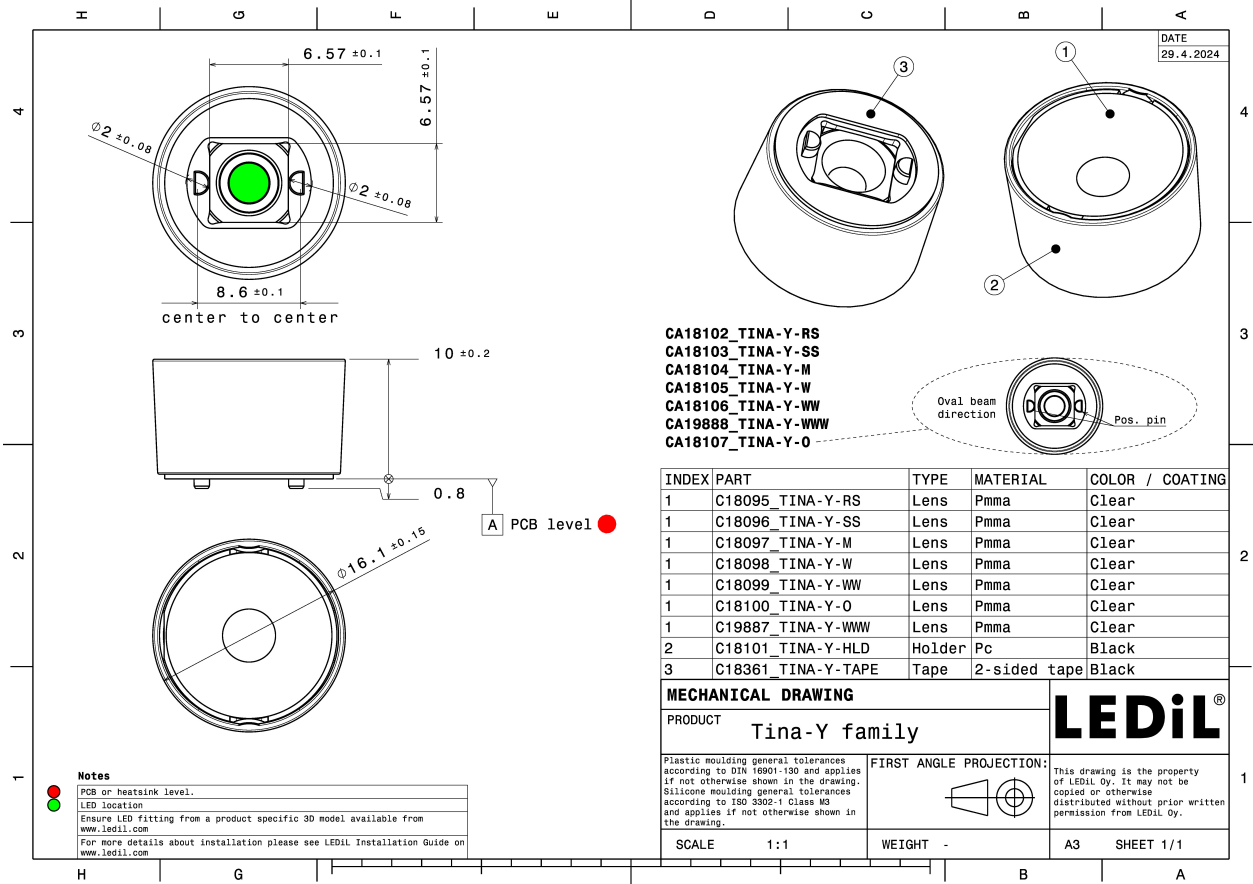


See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):





LED XP-G3
FWHM / FWTM 37.0° / 58.0°
Efficiency 79 %
Peak intensity 2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

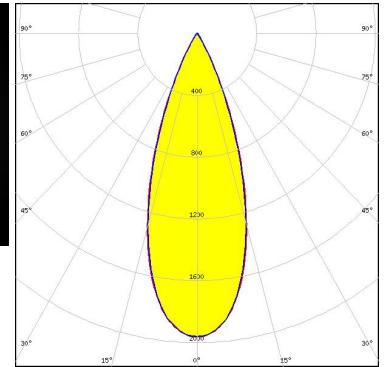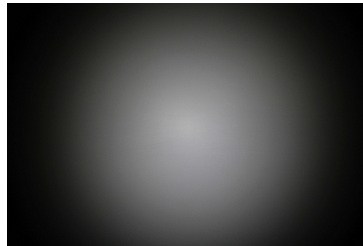

Light distribution files





LED XP-G4
FWHM / FWTM 43.0° / 61.0°
Efficiency 85 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

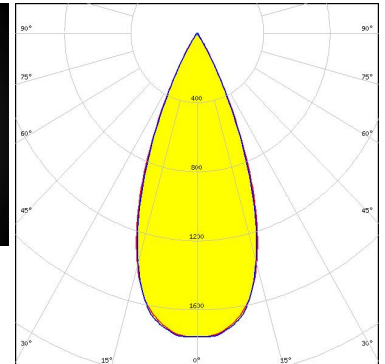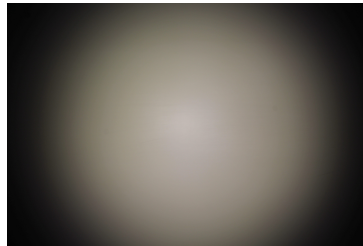

Light distribution files



LED NVSW719AC
FWHM / FWTM 36.0° / 55.0°
Efficiency 86 %
Peak intensity 2.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

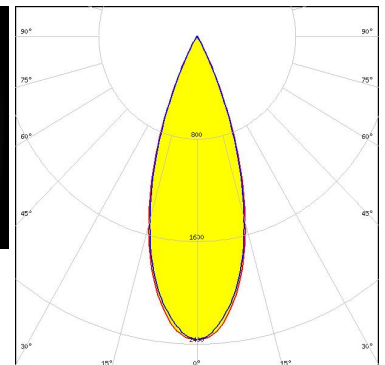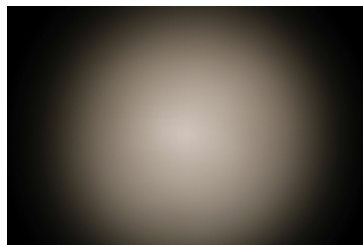


Light distribution files

OPTICAL RESULTS (MEASURED):

OSRAM
Opto Semiconductors

LED OSCONIQ C 3030
FWHM / FWTM 31.0° / 50.0°
Efficiency 83 %
Peak intensity 2.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

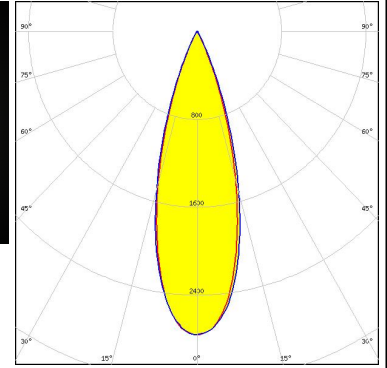


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED J Series 3030C
 FWHM / FWTM 36.0° / 56.0°
 Efficiency 86 %
 Peak intensity 2.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

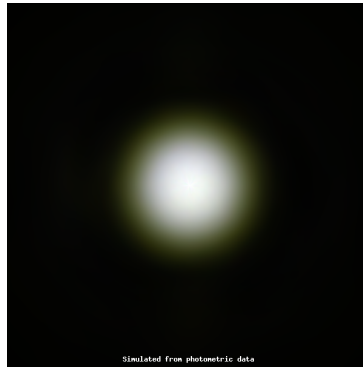

Light distribution files




LED XHP35.2 HD
 FWHM / FWTM 44.0° / 70.0°
 Efficiency 75 %
 Peak intensity 1.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

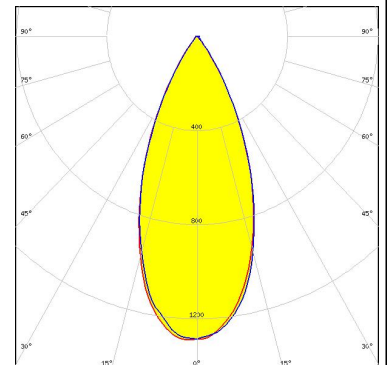

Light distribution files



LED XHP35.2 HI
 FWHM / FWTM 37.0° / 58.0°
 Efficiency 77 %
 Peak intensity 1.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

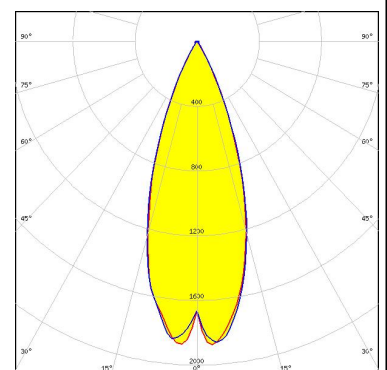


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XM-L RGBW (XMLDCL HI)
 FWHM / FWTM 41.0° / 62.0°
 Efficiency 86 %
 Peak intensity 1.9 cd/lm
 LEDs/each optic 1
 Light colour/type RGBW
 Required components:

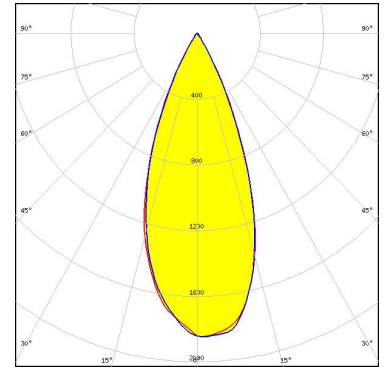

Light distribution files




LED XM-L3
 FWHM / FWTM 45.0° / 67.0°
 Efficiency 80 %
 Peak intensity 1.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

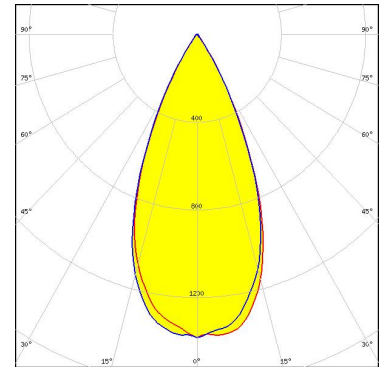

Light distribution files



LED XP-E2
 FWHM / FWTM 42.0° / 57.0°
 Efficiency 88 %
 Peak intensity 2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

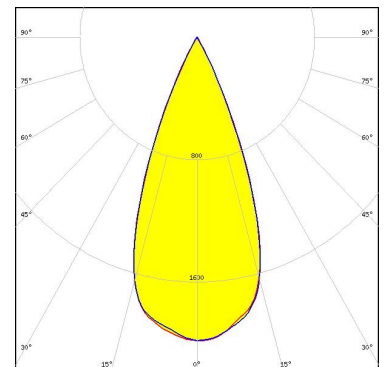


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XP-G2
FWHM / FWTM 42.0° / 59.0°
Efficiency 87 %
Peak intensity 1.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

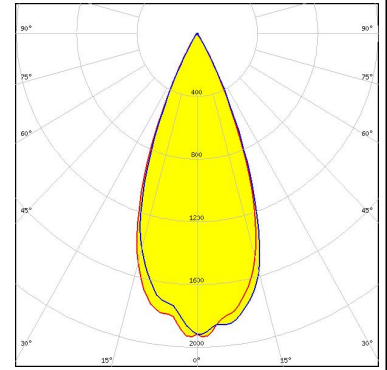

Light distribution files




LED XP-G4 HI
FWHM / FWTM 43.0 + 44.0° / 60.0°
Efficiency 86 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

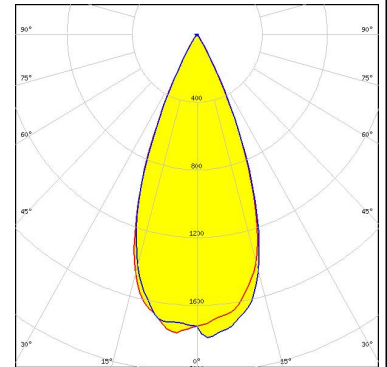

Light distribution files



LED XP-L HD
FWHM / FWTM 42.0° / 66.0°
Efficiency 84 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

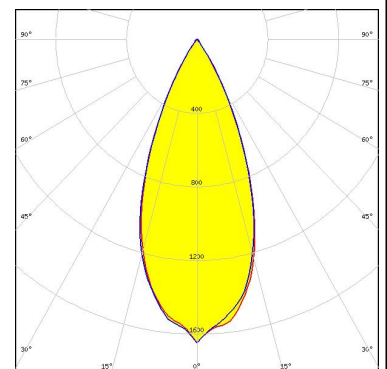


Light distribution files


OPTICAL RESULTS (SIMULATED):



LED XQ-E HD
FWHM / FWTM 44.0° / 59.0°
Efficiency 88 %
Peak intensity 1.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

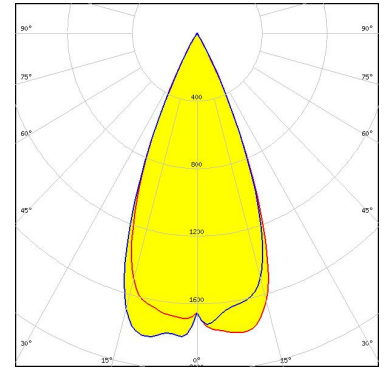


LED XQ-E HI
FWHM / FWTM 42.0° / 56.0°
Efficiency 87 %
Peak intensity 2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

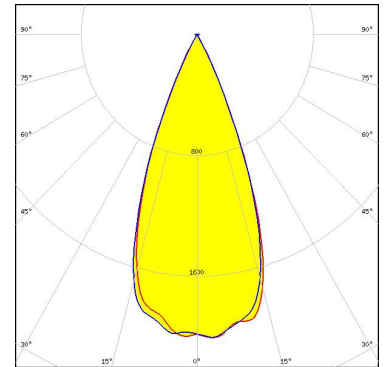

Light distribution files



LED LUXEON 5050 Round LES
FWHM / FWTM 38.0° / 64.0°
Efficiency 82 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

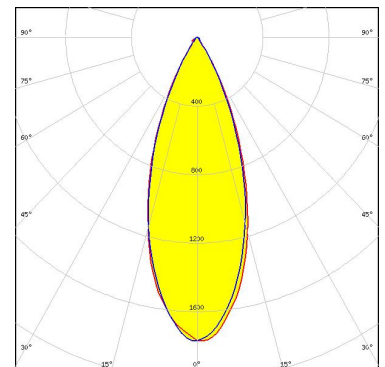


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED LUXEON 5050 Round LES
FWHM / FWTM 38.0° / 65.0°
Efficiency 82 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

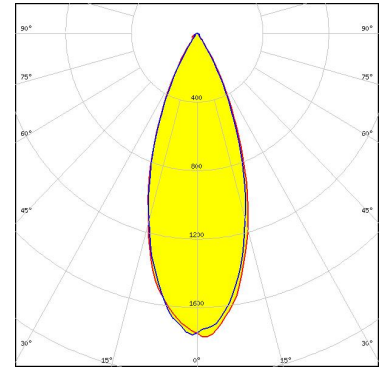

Light distribution files




LED LUXEON 5050 Square LES
FWHM / FWTM 38.0° / 64.0°
Efficiency 81 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

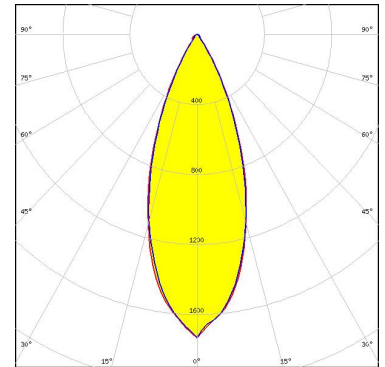

Light distribution files




LED LUXEON C
FWHM / FWTM 42.0° / 58.0°
Efficiency 80 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

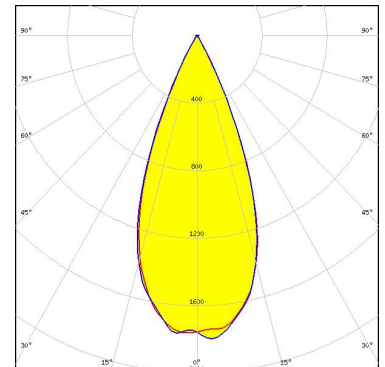

OPTICAL RESULTS (SIMULATED):




LED LUXEON HL2X
FWHM / FWTM 48.0° / 66.0°
Efficiency 86 %
Peak intensity 1.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

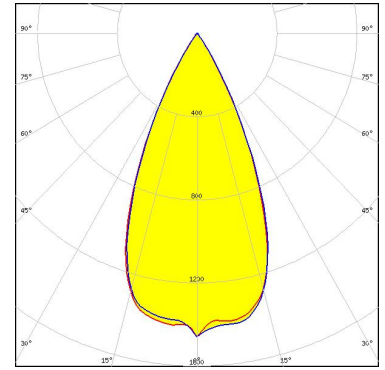

Light distribution files




LED LUXEON MZ
FWHM / FWTM 37.0° / 60.0°
Efficiency 83 %
Peak intensity 2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

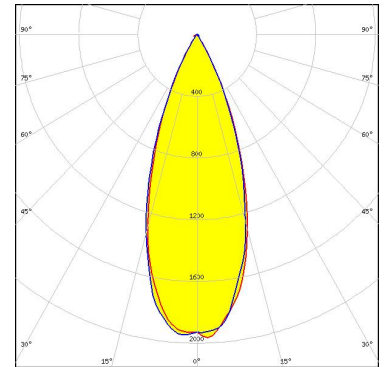

Light distribution files



LED LUXEON TX
FWHM / FWTM 40.0° / 59.0°
Efficiency 85 %
Peak intensity 1.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

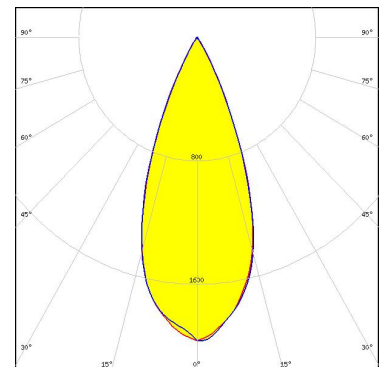


Light distribution files


OPTICAL RESULTS (SIMULATED):



LED SST-20
 FWHM / FWTM 38.0° / 56.0°
 Efficiency 86 %
 Peak intensity 2.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

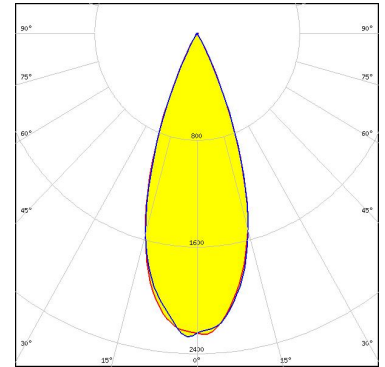


LED NVSW219F
 FWHM / FWTM 46.0° / 65.0°
 Efficiency 86 %
 Peak intensity 1.6 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

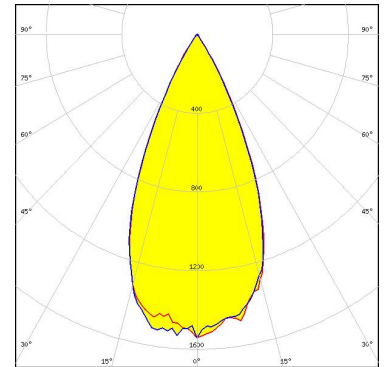

Light distribution files



LED NVSxE21A
 FWHM / FWTM 32.0° / 50.0°
 Efficiency 81 %
 Peak intensity 2.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

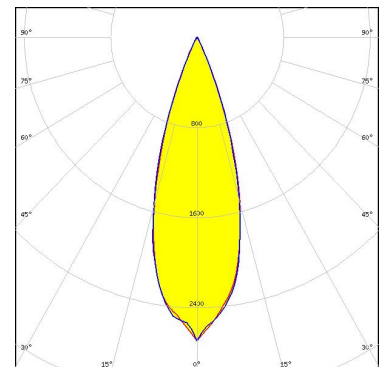


Light distribution files

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED Duris S8
 FWHM / FWTM 39.0° / 69.0°
 Efficiency 77 %
 Peak intensity 1.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

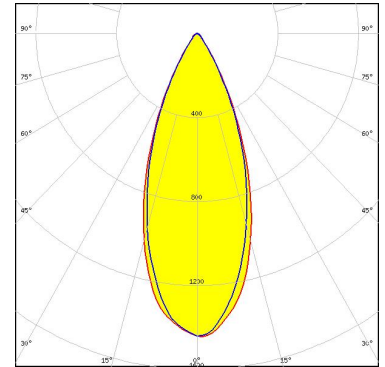

Light distribution files


OSRAM
Opto Semiconductors

LED OSLO Pure 1414
 FWHM / FWTM 40.0° / 54.0°
 Efficiency 89 %
 Peak intensity 2.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

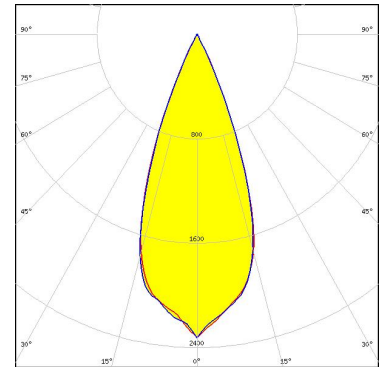

OSRAM
Opto Semiconductors


LED OSLO Square CSSRM2/CSSRM3
 FWHM / FWTM 41.0° / 60.0°
 Efficiency 86 %
 Peak intensity 2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

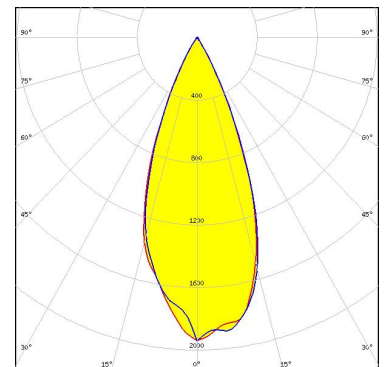

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED OSLON Square CSSRM2/CSSRM3
FWHM / FWTM 36.0° / 58.0°
Efficiency 86 %
Peak intensity 2.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

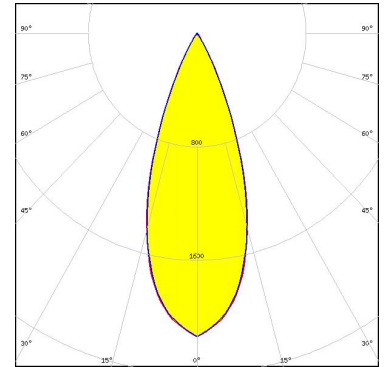

Light distribution files

SAMSUNG


LED LH351B
FWHM / FWTM 44.0° / 64.0°
Efficiency 86 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

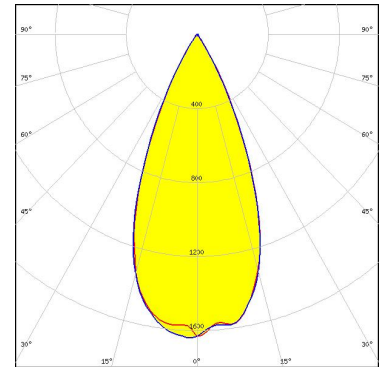

Light distribution files

SAMSUNG


LED LH351B
FWHM / FWTM 45.0° / 64.0°
Efficiency 87 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

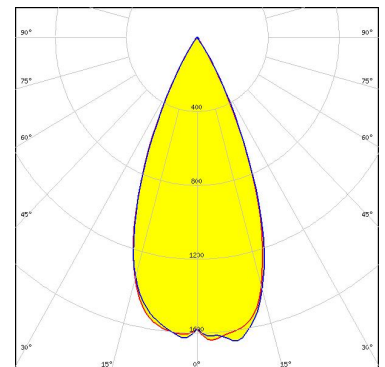

OPTICAL RESULTS (SIMULATED):

SAMSUNG

LED LH351C
FWHM / FWTM 45.0° / 65.0°
Efficiency 87 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

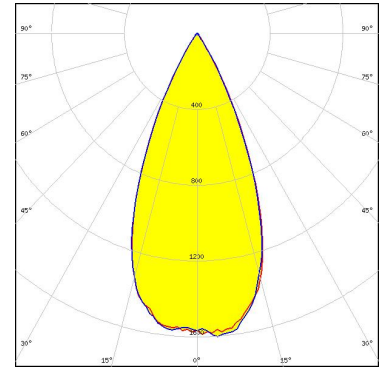


Light distribution files



SEOUL SEMICONDUCTOR

LED Z8Y22
FWHM / FWTM 34.0° / 54.0°
Efficiency 74 %
Peak intensity 2.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

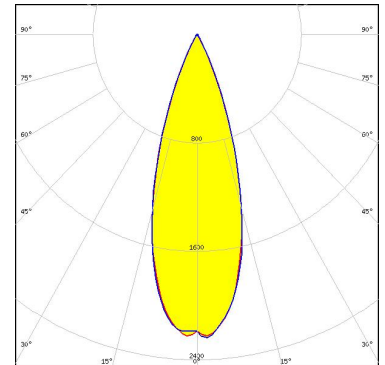

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Poznan, Poland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)