

EMILY-WWW

~60° wide beam. 13.43 mm high lens.

SPECIFICATION:

Dimensions	Ø 26.0
Height	13.4 mm
Fastening	tape, pin
ROHS compliant	yes ⓘ




MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
EMILY-WWW	Single lens	PMMA	clear		
SPUTNIK-TAPE	Tape	Acryl tape	black		

ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
CA12589_EMILY-WWW	Single lens	1690	260	130	11.2
» Box size: 480 x 280 x 300 mm					


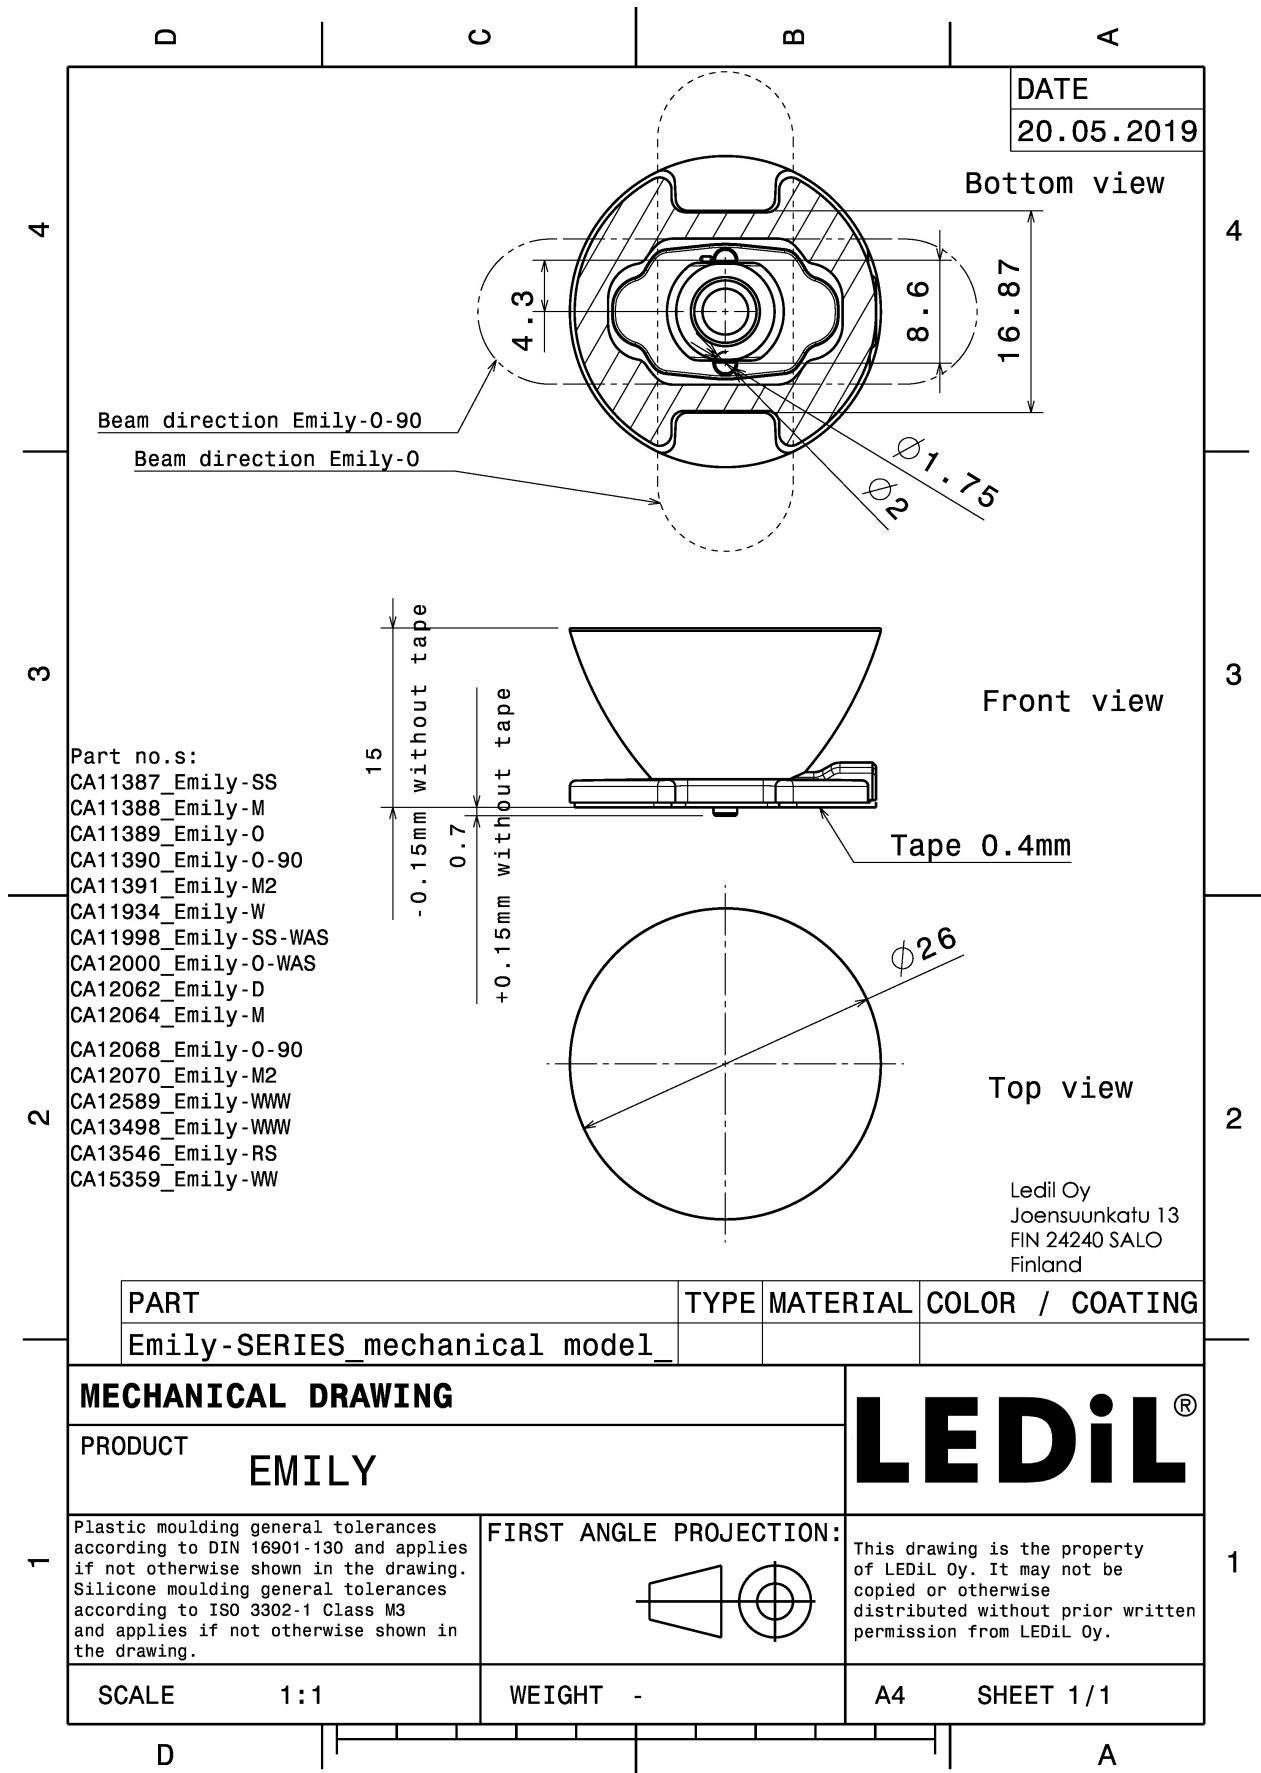


See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):





LED XHP35 HD
FWHM / FWTM 70.0° / 101.0°
Efficiency 82 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

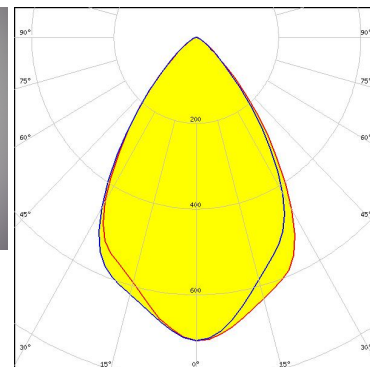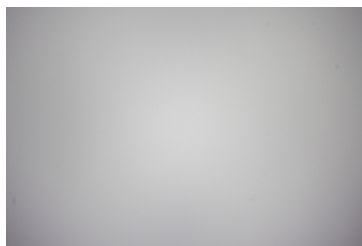

Light distribution files





LED XP-E
FWHM / FWTM 58.0° / 89.0°
Efficiency 86 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

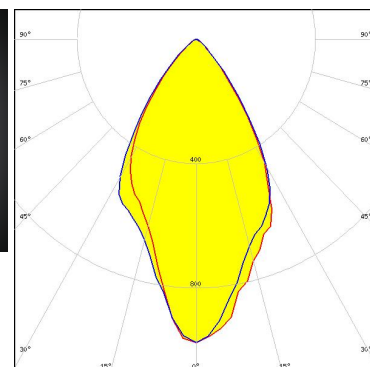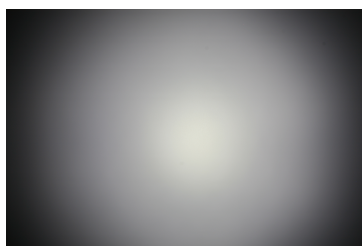

Light distribution files



LED XP-E2
FWHM / FWTM 69.0° / 94.0°
Efficiency 86 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

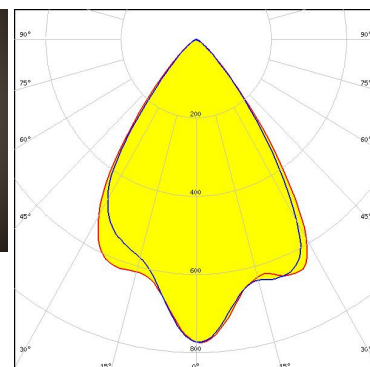
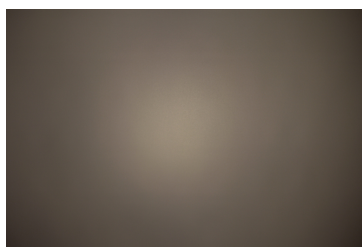


Light distribution files

OPTICAL RESULTS (MEASURED):





LED XP-G
FWHM / FWTM 57.0° / 88.0°
Efficiency 86 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

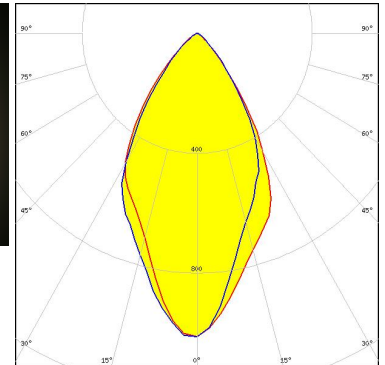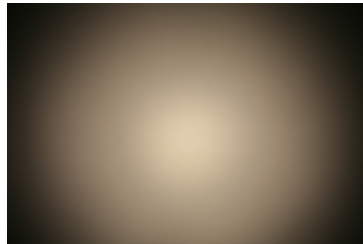

Light distribution files





LED XP-G2
FWHM / FWTM 61.0° / 95.0°
Efficiency 87 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

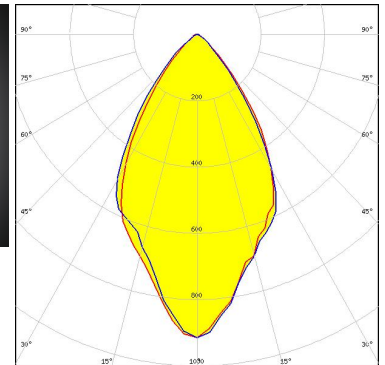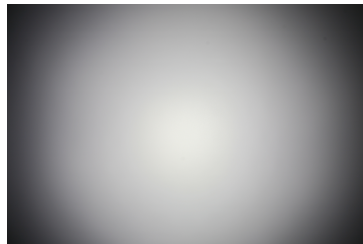

Light distribution files



LED XP-G3
FWHM / FWTM 63.0° / 96.0°
Efficiency 93 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

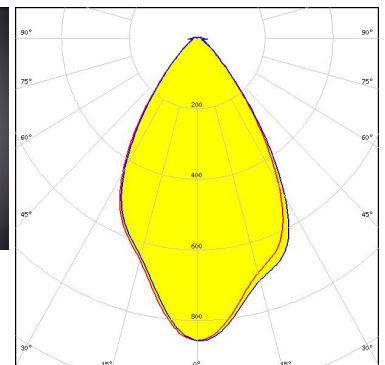
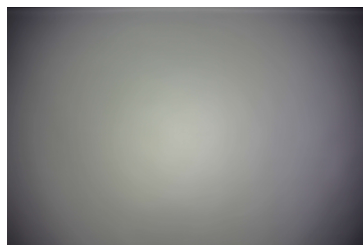


Light distribution files

OPTICAL RESULTS (MEASURED):





LED XP-L HD
 FWHM / FWTM 69.0° / 100.0°
 Efficiency 82 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

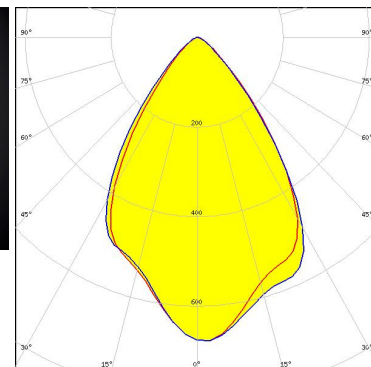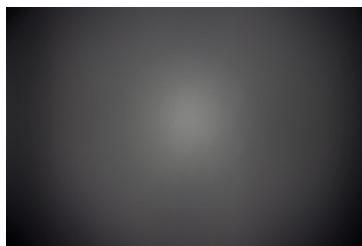

Light distribution files





LED XP-L HI
 FWHM / FWTM 66.0° / 93.0°
 Efficiency 88 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

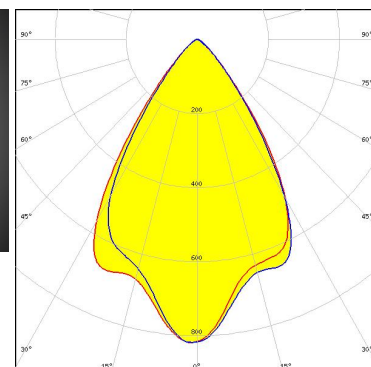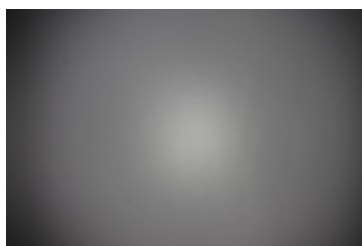

Light distribution files



LED LUXEON A
 FWHM / FWTM 57.0° / 92.0°
 Efficiency 84 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

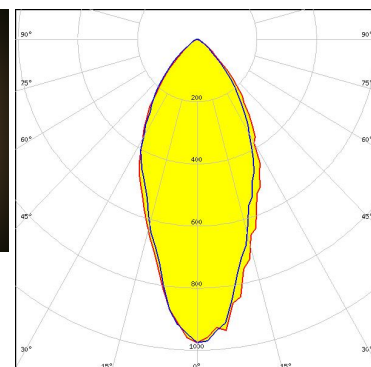
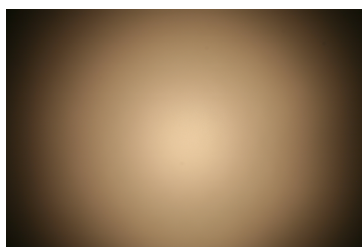


Light distribution files

OPTICAL RESULTS (MEASURED):





LED NCSxx19B
 FWHM / FWTM 60.0° / 91.0°
 Efficiency 83 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

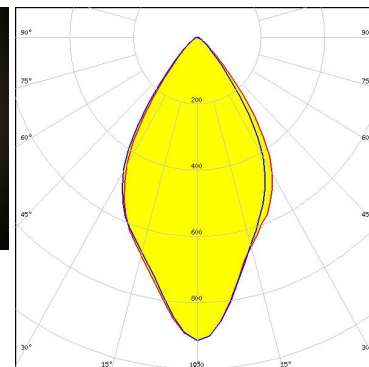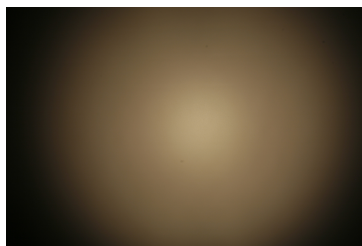

Light distribution files





LED OSLOM Square EC
 FWHM / FWTM 61.0° / 92.0°
 Efficiency 85 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

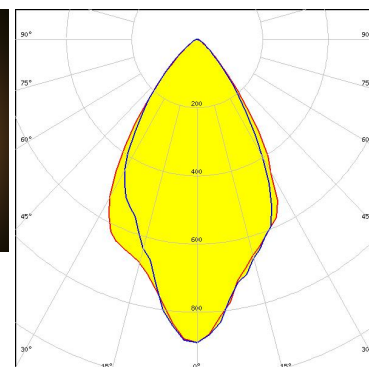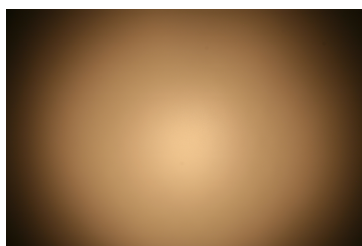

Light distribution files



LED Z8Y22P
 FWHM / FWTM 60.0° / 92.0°
 Efficiency 92 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

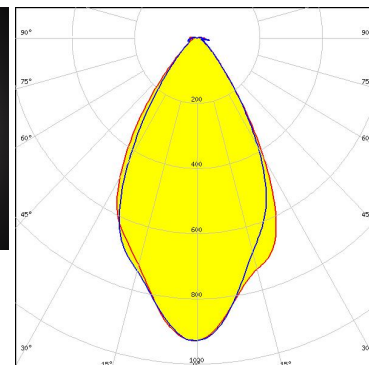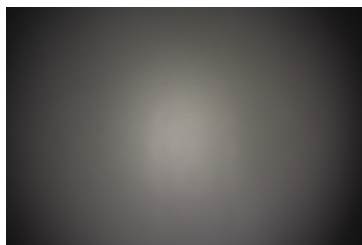


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XHP35.2 HD
 FWHM / FWTM 70.0° / 104.0°
 Efficiency 93 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

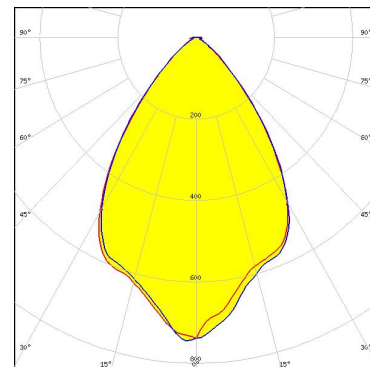

Light distribution files




LED XP-G2
 FWHM / FWTM 74.0° / 94.0°
 Efficiency 96 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

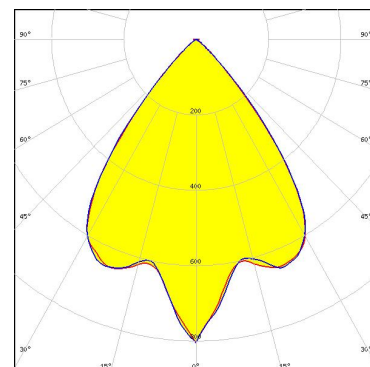

Light distribution files



LED XP-G2 HE
 FWHM / FWTM 78.0° / 102.0°
 Efficiency 95 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:


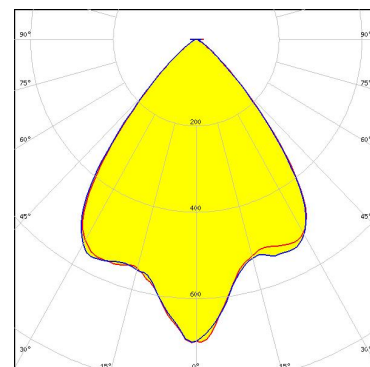


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED NCSxE17A
FWHM / FWTM 54.0° / 86.0°
Efficiency 90 %
Peak intensity 1.1 cd/lm
LEDs/each optic 4
Light colour/type White
Required components:

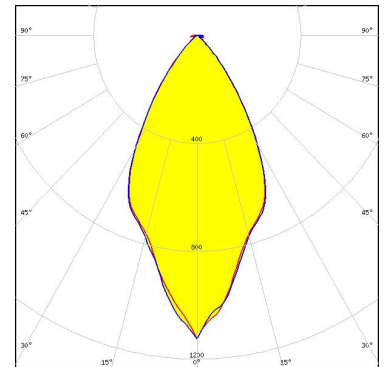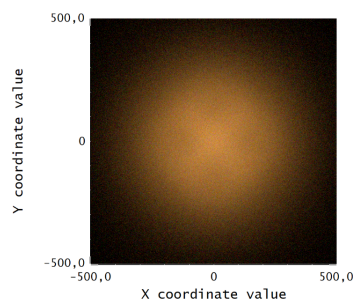

Light distribution files




LED NV4WB35AM
FWHM / FWTM 66.0° / 94.0°
Efficiency 97 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

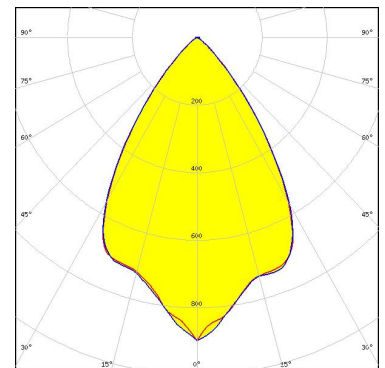

Light distribution files



LED NVSW719AC
FWHM / FWTM 76.0° / 96.0°
Efficiency 97 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

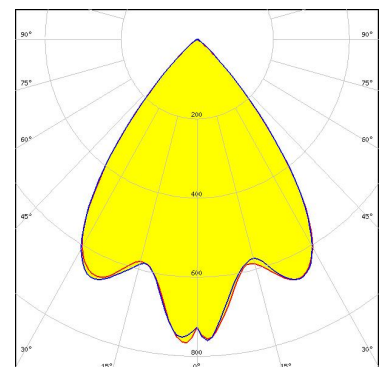


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED NVSxE21A
 FWHM / FWTM 60.0° / 94.0°
 Efficiency 96 %
 Peak intensity 1 cd/lm
 LEDs/each optic 4
 Light colour/type White
 Required components:

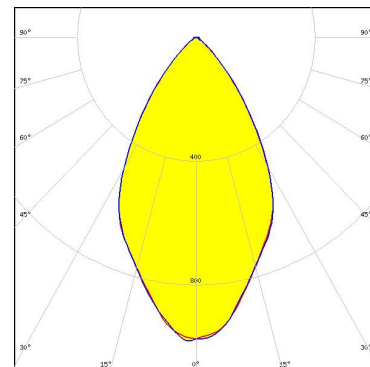

Light distribution files




LED NVSxx19B/NVSxx19C
 FWHM / FWTM 76.0° / 98.0°
 Efficiency 95 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

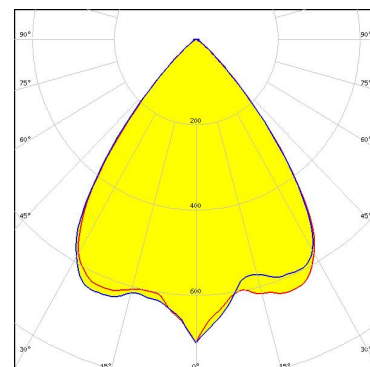

Light distribution files



LED OSCONIQ P 3030
 FWHM / FWTM 67.0° / 88.0°
 Efficiency 97 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

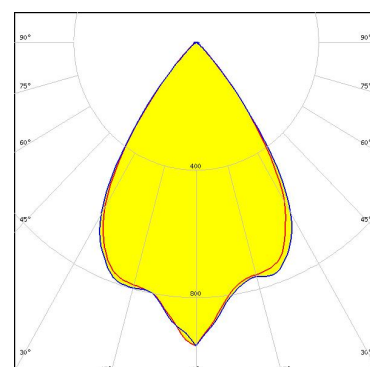


Light distribution files

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED OSLON Signal
FWHM / FWTM 74.0° / 91.0°
Efficiency 97 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour/type Blue
Required components:

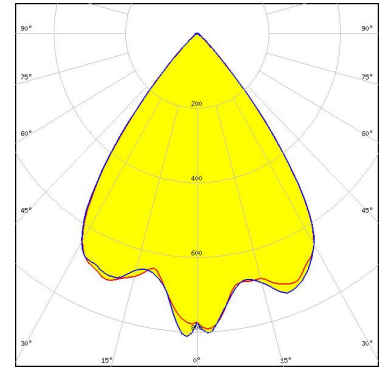

Light distribution files

OSRAM
Opto Semiconductors


LED OSLON SSL 150
FWHM / FWTM 74.0° / 92.0°
Efficiency 97 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

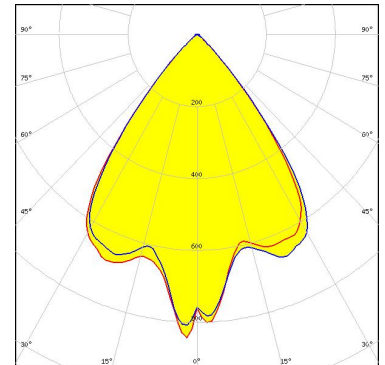

Light distribution files

OSRAM
Opto Semiconductors

LED OSLON SSL 150
FWHM / FWTM 74.0° / 92.0°
Efficiency 96 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

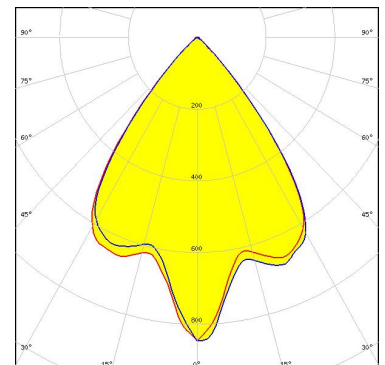


Light distribution files

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED OSLON SSL 80
FWHM / FWTM 69.0° / 89.0°
Efficiency 97 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

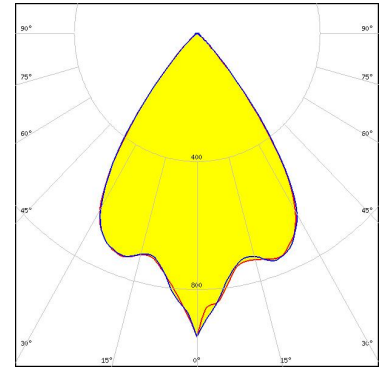

Light distribution files

OSRAM
Opto Semiconductors


LED OSLON SSL 80
FWHM / FWTM 67.0° / 86.0°
Efficiency 97 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour/type Red
Required components:

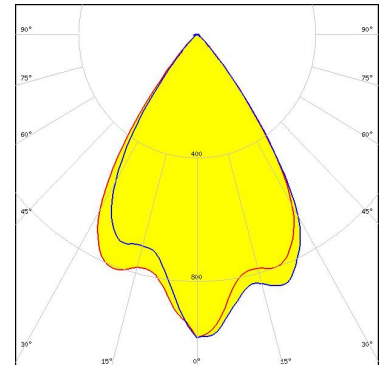

Light distribution files

OSRAM
Opto Semiconductors

LED OSLON SSL 80
FWHM / FWTM 72.0° / 91.0°
Efficiency 96 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

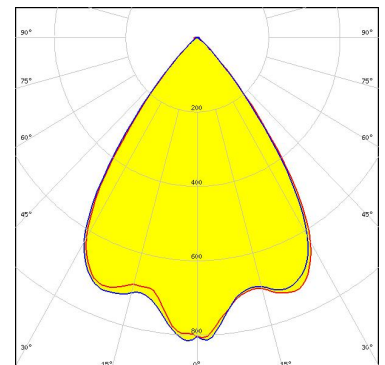


Light distribution files

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED OSLON SSL 80
FWHM / FWTM 72.0° / 90.0°
Efficiency 97 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour/type True Green
Required components:

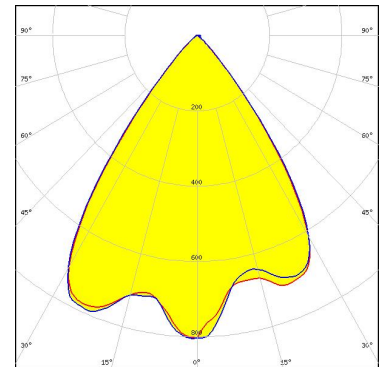

Light distribution files

OSRAM
Opto Semiconductors


LED SFH 4716AS
FWHM / FWTM 62.0° / 84.0°
Efficiency 96 %
LEDs/each optic 1
Light colour/type IR
Required components:

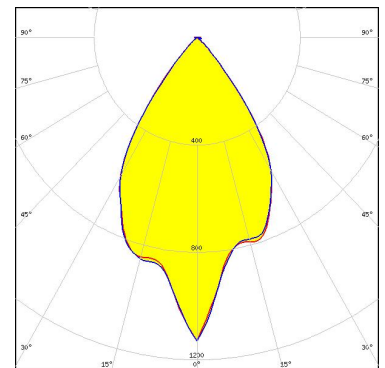

Light distribution files

SEOL
SEOUL SEMICONDUCTOR

LED SEOUL DC 3528
FWHM / FWTM 70.0° / 92.0°
Efficiency 96 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

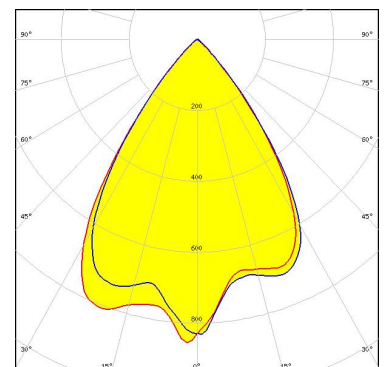

Light distribution files

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 7
FI-24100 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Poznan, Poland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)