


**Z4S-250**

Ø 4 mm-Sicherheits-Messleitungsset „Universal“  
(6-teilig schwarz/rot)

**Z4S-250**

Ø 4 mm Safety Test Lead Set "Universal"  
(6-piece black/red)

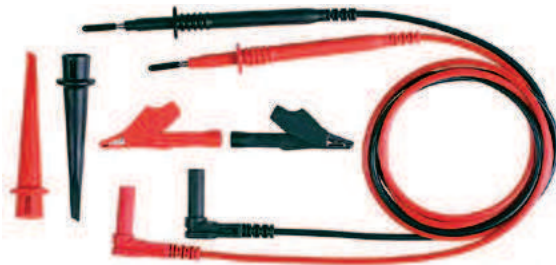

S1

| Typ     | Bestell-Nr. |  | Type    | Order No |  |
|---------|-------------|--|---------|----------|--|
| Z4S-250 | 99.00405    |  | Z4S-250 | 99.01405 |  |

**Set-Inhalt und technische Daten**

|                           |   |
|---------------------------|---|
| 2 × XPS-480/2G<br>CE (UL) | Ø 4 mm-Sicherheits-Messleitungen mit Edelstahl-Prüfspitze mit Gewinde zum Aufschrauben von Zubehör, Silicon-isoliert, 100 cm lang, 0,75 mm <sup>2</sup> . |
| 2 × HC200-2G<br>CE        | Aufschraubbare Sicherheits-Hakengreifer.  |
| 2 × XKK-200-2G<br>CE      | Aufschraubbare Sicherheits-Krokodilklemmen mit Feindrahtfläche.   |

**Set Contents and Technical Data**

|  |                                |
|--|--------------------------------|
| Ø 4 mm safety test leads with stainless steel probe with thread for screwing-on accessories, Silicone insulated, 100 cm long, 0,75 mm <sup>2</sup> . | <b>1000 V, CAT II<br/>15 A</b> |
| Screw-on safety hook clips.  | <b>1000 V, CAT II<br/>5 A</b>  |
| Screw-on safety crocodile clips with surface for fine wire.  | <b>600 V, CAT II<br/>10 A</b>  |

**Z4S-300**

Ø 4 mm-Sicherheits-Messleitungsset „Elektroniker“  
(10-teilig schwarz/rot)

**Z4S-300**

Ø 4 mm Safety Test Lead Set "Electronics"  
(10-piece black/red)



S2

| Typ     | Bestell-Nr. |  | Type    | Order No |  |
|---------|-------------|--|---------|----------|--|
| Z4S-300 | 99.00406    |  | Z4S-300 | 99.01406 |  |

**Set-Inhalt und technische Daten**

|                               |  |
|-------------------------------|--|
| 2 × XMS-402<br>CE (UL)        | Ø 4 mm-Sicherheits-Messleitungen, Silicon-isoliert, 100 cm lang, 0,75 mm <sup>2</sup> .  |
| 2 × SPP4-S/F<br>CE            | Aufsteckbare Sicherheits-Prüfspitzen mit nadel-förmiger Edelstahlspitze, die unter leichtem Druck einfedert. Lieferung mit Schutzkappen. |
| 2 × SAGK4-K<br>CE             | Kleine aufsteckbare Sicherheits-Krokodilklemmen mit allseitiger Isolierung, gezahntem Maul für grobe Abgriffe sowie Feindrahtfläche.     |
| 2 × MINIGRIP-XA<br>CE (UL)    | Aufsteckbare Sicherheits-Hakengreifer.   |
| 2 × MINIGRIP-XB/50<br>CE (UL) | Aufsteckbare Sicherheits-Abgreifer mit Federdrahtklammer aus Edelstahl in flexiblem Schaft (Silicon-isoliert), Schaftlänge 50mm.         |

**Set Contents and Technical Data**

|  |                                    |
|--|------------------------------------|
| Ø 4 mm safety test leads, Silicone insulated, 100 cm long, 0,75 mm <sup>2</sup> .  | <b>1000 V, CAT II<br/>15 A</b>     |
| Push-on safety test probes with spring-loaded stainless steel needle which reacts resiliently under light pressure. Supplied with protective caps. | <b>1000 V, CAT II<br/>≤ 1 A</b>    |
| Small push-on safety crocodile clips with all-round insulation, toothed jaws for wide grip and surface for fine wire.                              | <b>300 V, CAT II<br/>max. 15 A</b> |
| Push-on safety hook clips.   | <b>1000 V, CAT II<br/>3 A</b>      |
| Push-on safety test clips with spring wire grabber (stainless steel) in a flexible shaft (Silicone insulated), shaft length 50mm.                  | <b>1000 V, CAT II<br/>max. 1 A</b> |