


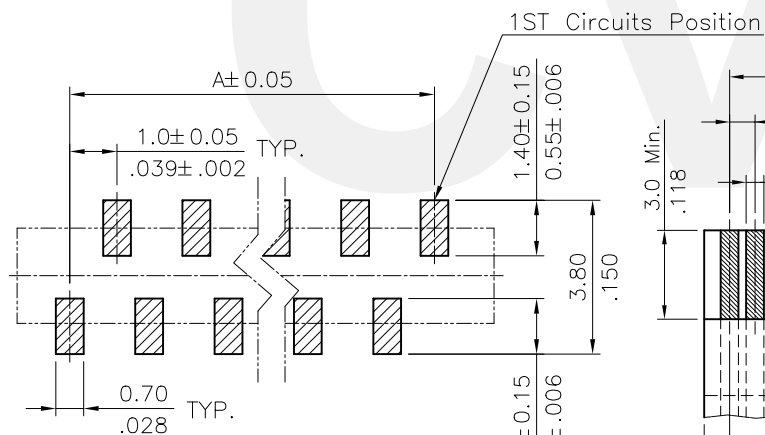
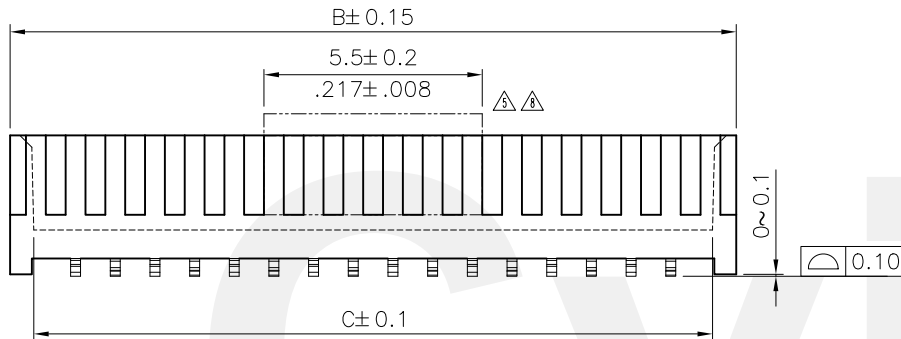
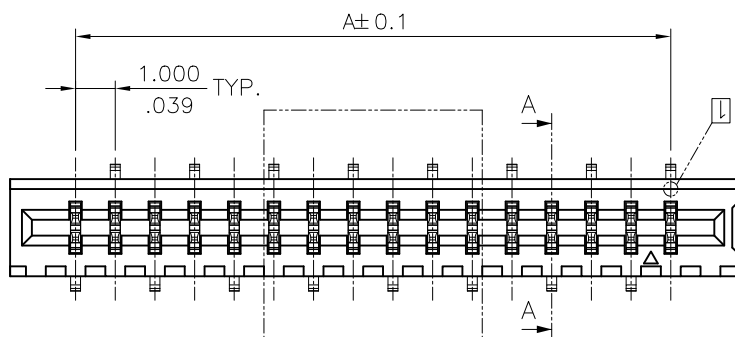


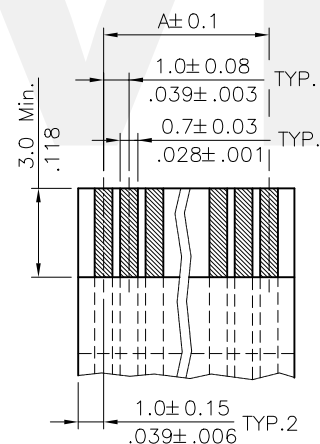

Sold Pad Pattern

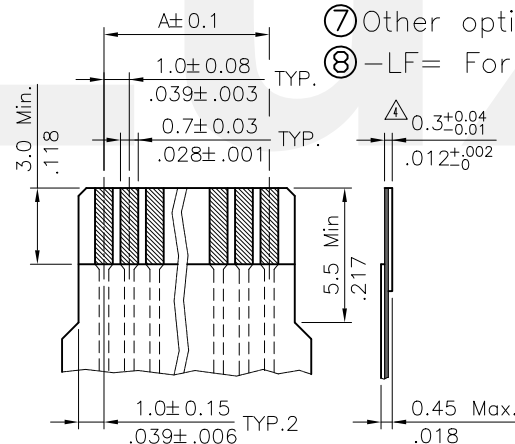

Accommodated FFC

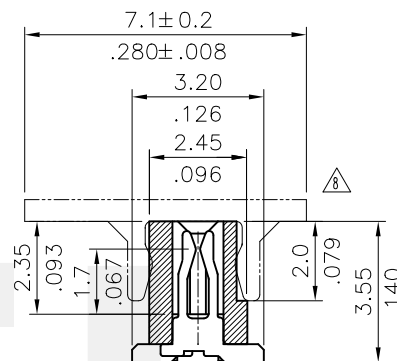

Accommodated FPC

A = 1.0 * No. of Spaces

B = A + 3.3

C = A + 2.1

* Available in 4 through 32 circuits

Note :

1. Material :

* Body : Nylon 6T With 30% GF. UL 94-0
Color Black

* Contact : Copper alloy

2. For Lead Free IR Reflow Process

Ordering Code

CF08 ** 1 M 1 * 0 -LF
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.

② No. of Circuits

③ Plating code:

1 = 3.05μm(120μ") Min. Matte Tin
over 1.27μm(50μ") Nickel

④ Contact style: M = Straight SMT Type

⑤ Color: 1 = Black

⑥ Packing options:

T = Tube Packing(Without PAD)

R = Tape & Reel Packing(With PAD)


⑦ Other options: 0 = Standard

⑧ -LF = For Lead Free IR Reflow Process

Lead Free Process

RoHS Compliant




⑧	Sandy	6/14-16'	ECRB116027/ECNT116108	2016.06.16 ISSUED	DATE	UNIT: mm / inch	TITLE: 1.00mm ST. SMT TYPE LIF FFC/FPC CONN.	 瀚荃股份有限公司 CviLux Corporation	DRAWING NO. CF0816SI PART NO. CF08**1M1*0-LF			
⑦	Sun	1/18-16'	ECRB115071/ECNT116004		DRAWN BY: Sandy	6/14-16'						TOLERANCE UNLESS OTHERWISE SPECIFIED
⑥	Karen	6/04-12'	ECN12095-0/ECR12033-1		ENGINEER: Sun	6/15-16'	.X ± 0.15/.006 X' ± .1"					
⑤	Karen	11/09-09'	ECN09535		CHECKED BY: Eisley	6/16-16'	.XX ± 0.10/.004 .X' ±					FINISH:
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eisley	6/16-16'	.XXX ± 0.05/.002 .XX' ±					

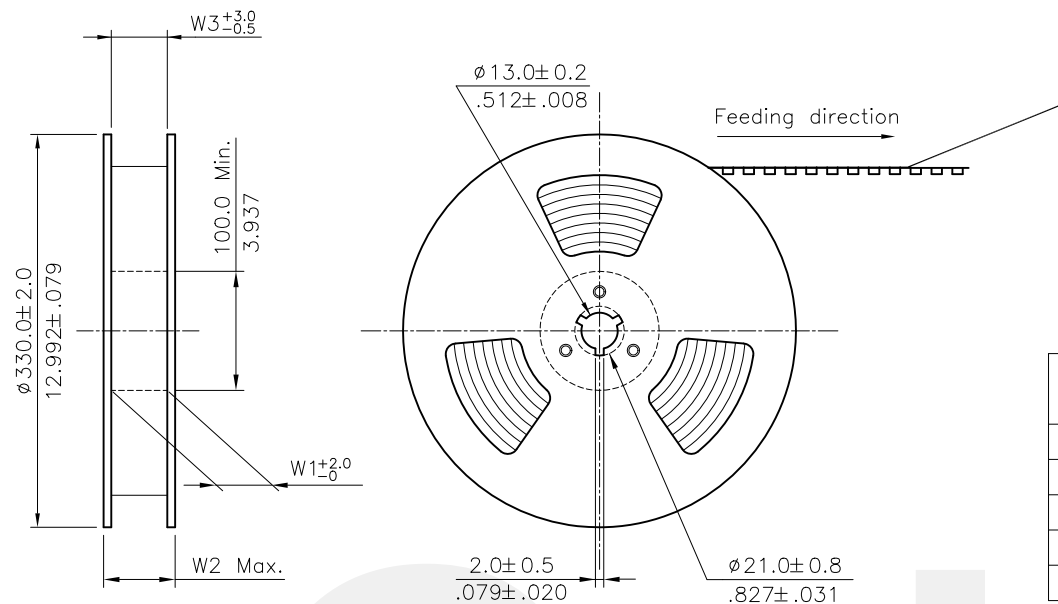

NOTE :

- * Reel Material : Corrugated Paper
- * Carrier Material : Clear Conductive Polystyrene Alloy
- * Cover Tape Material : Polyester
- * Cover Tape Peel Strength : 0.1N — 1.3N
- * Carrier camber is within 1mm in 100mm
- * All dimensions meet EIA-481-2 & EIA-481-3 requirements.
- * Quantity : 1200 PCS/Reel

Circuits	Dimension					Packing (Reel/Carton)
	E	F	W1	W2	W3	
4~5	16.0(.630)	—	16.5(.650)	22.5(.886)	16.5(.650)	11
6~15	24.0(.945)	—	24.5(.965)	30.5(1.201)	24.5(.965)	9
16~17	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
18~30	44.0(1.732)	40.40(1.591)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5
31~32	56.0(2.205)	52.40(2.063)	56.5(2.224)	62.5(2.460)	56.5(2.224)	4

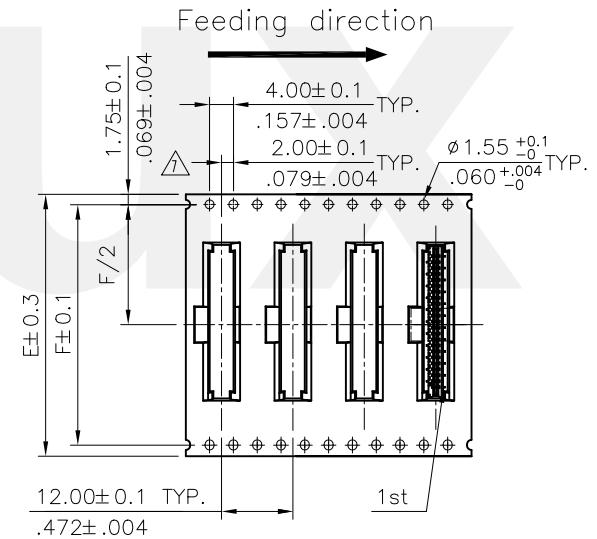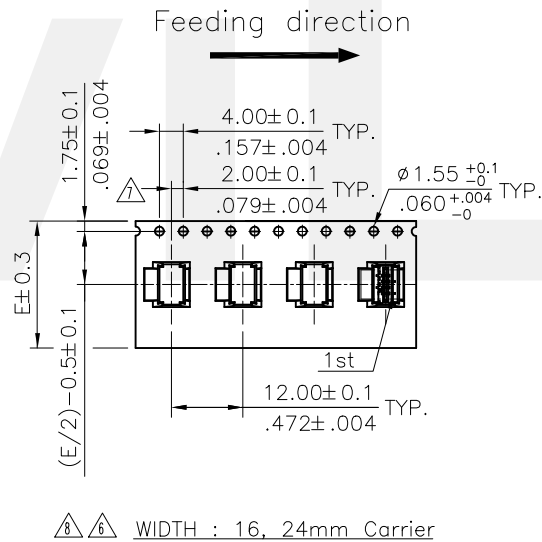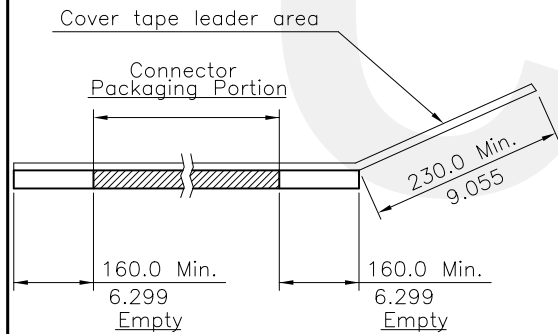

RoHS Compliant

8	Sandy	6/14-16'	ECRB116027/ECNT116108	DATE	UNIT: mm / inch	TITLE: 1.00mm ST. SMT TYPE LIF FFC/FPC CONN.	 瀚荃股份有限公司 CviLux Corporation			
7	Sun	1/18-16'	ECRB115071/ECNT116004	DRAWN BY: Sandy	6/14-16'					
6	Karen	6/04-12'	ECN12095-0/ECR12033-1	ENGINEER: Sun	6/15-16'	MATERIAL:	DRAWING NO. CF0816SI	PART NO. CF08**1M1*0-LF	SHEET 2 OF 2	
5	Karen	11/09-09'	ECN09535	CHECKED BY: Eisley	6/16-16'	CUSTOMER:				
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	6/16-16'		SCALE			

